





CONVERSION
SCALES



Feet	Meters
1	3048
2	6096
3	9144
4	12192
5	15240
6	18288
7	21336
8	24384
9	27432
10	30480

To convert feet to meters
multiply by .3048
To convert meters to feet
multiply by 3.2808

1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide



Produced by the United States Geological Survey and National Ocean Survey
Control by the USGS and NOS/NOAA
Orthophotomaps prepared from aerial photographs taken January 18, 1976. Compiled by photogrammetric methods from aerial photographs taken January 1975. Field checked 1976. Map edited 1982.
Supersedes topographic map dated 1956.
Bathymetry compiled by the National Ocean Survey from tide-coordinated hydrographic surveys.
This information is not intended for navigational purposes.
Mean low water (dotted) line and mean high water (solid) line compiled by NOS from tide-coordinated aerial photographs.
Apparent shoreline (outer edge of vegetation) shown by photomaps.
Projection and 10,000-foot grid ticks: Florida coordinate system, north zone (Lambert conformal conic).
1000-meter Universal Transverse Mercator grid, zone 16.
1927 North American Datum.
To place on the predicted North American Datum 1983 move the projection lines 19 meters south and 7 meters west as shown by dashed corner ticks.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

UTM GRID AND 1982 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

QUADRANGLE LOCATION


HYDROGRAPHIC SURVEY INFORMATION

Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-1373B	1877	1:40,000	05-11
H-1374B	1877	1:20,000	03-80
H-1375	1877	1:20,000	03-26
H-5780	1935	1:10,000	01-08
H-5781	1935	1:10,000	02-08
H-5782	1935	1:10,000	02-07
H-7173	1947	1:10,000	01-15
H-7633	1947	1:40,000	05-76

SCALE 1:24 000

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTAL CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY
0.5 METER CONTOURS—DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SURVEY, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

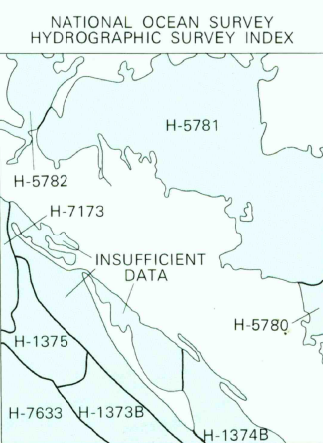

ROAD CLASSIFICATION

Primary highway, hard surface — Light-duty road, hard or improved surface
Secondary highway, hard surface — Unimproved road —
Trails —
Interstate Route — U.S. Route — State Route — County Route

CONTOURS AND ELEVATIONS IN METERS

LONG POINT, FLA.
30085-A5-TB-024
1982

DMA 3844 II SE SERIES V8470

RETURN TO:
USGS AND HISTORICAL MAP ARCHIVES