


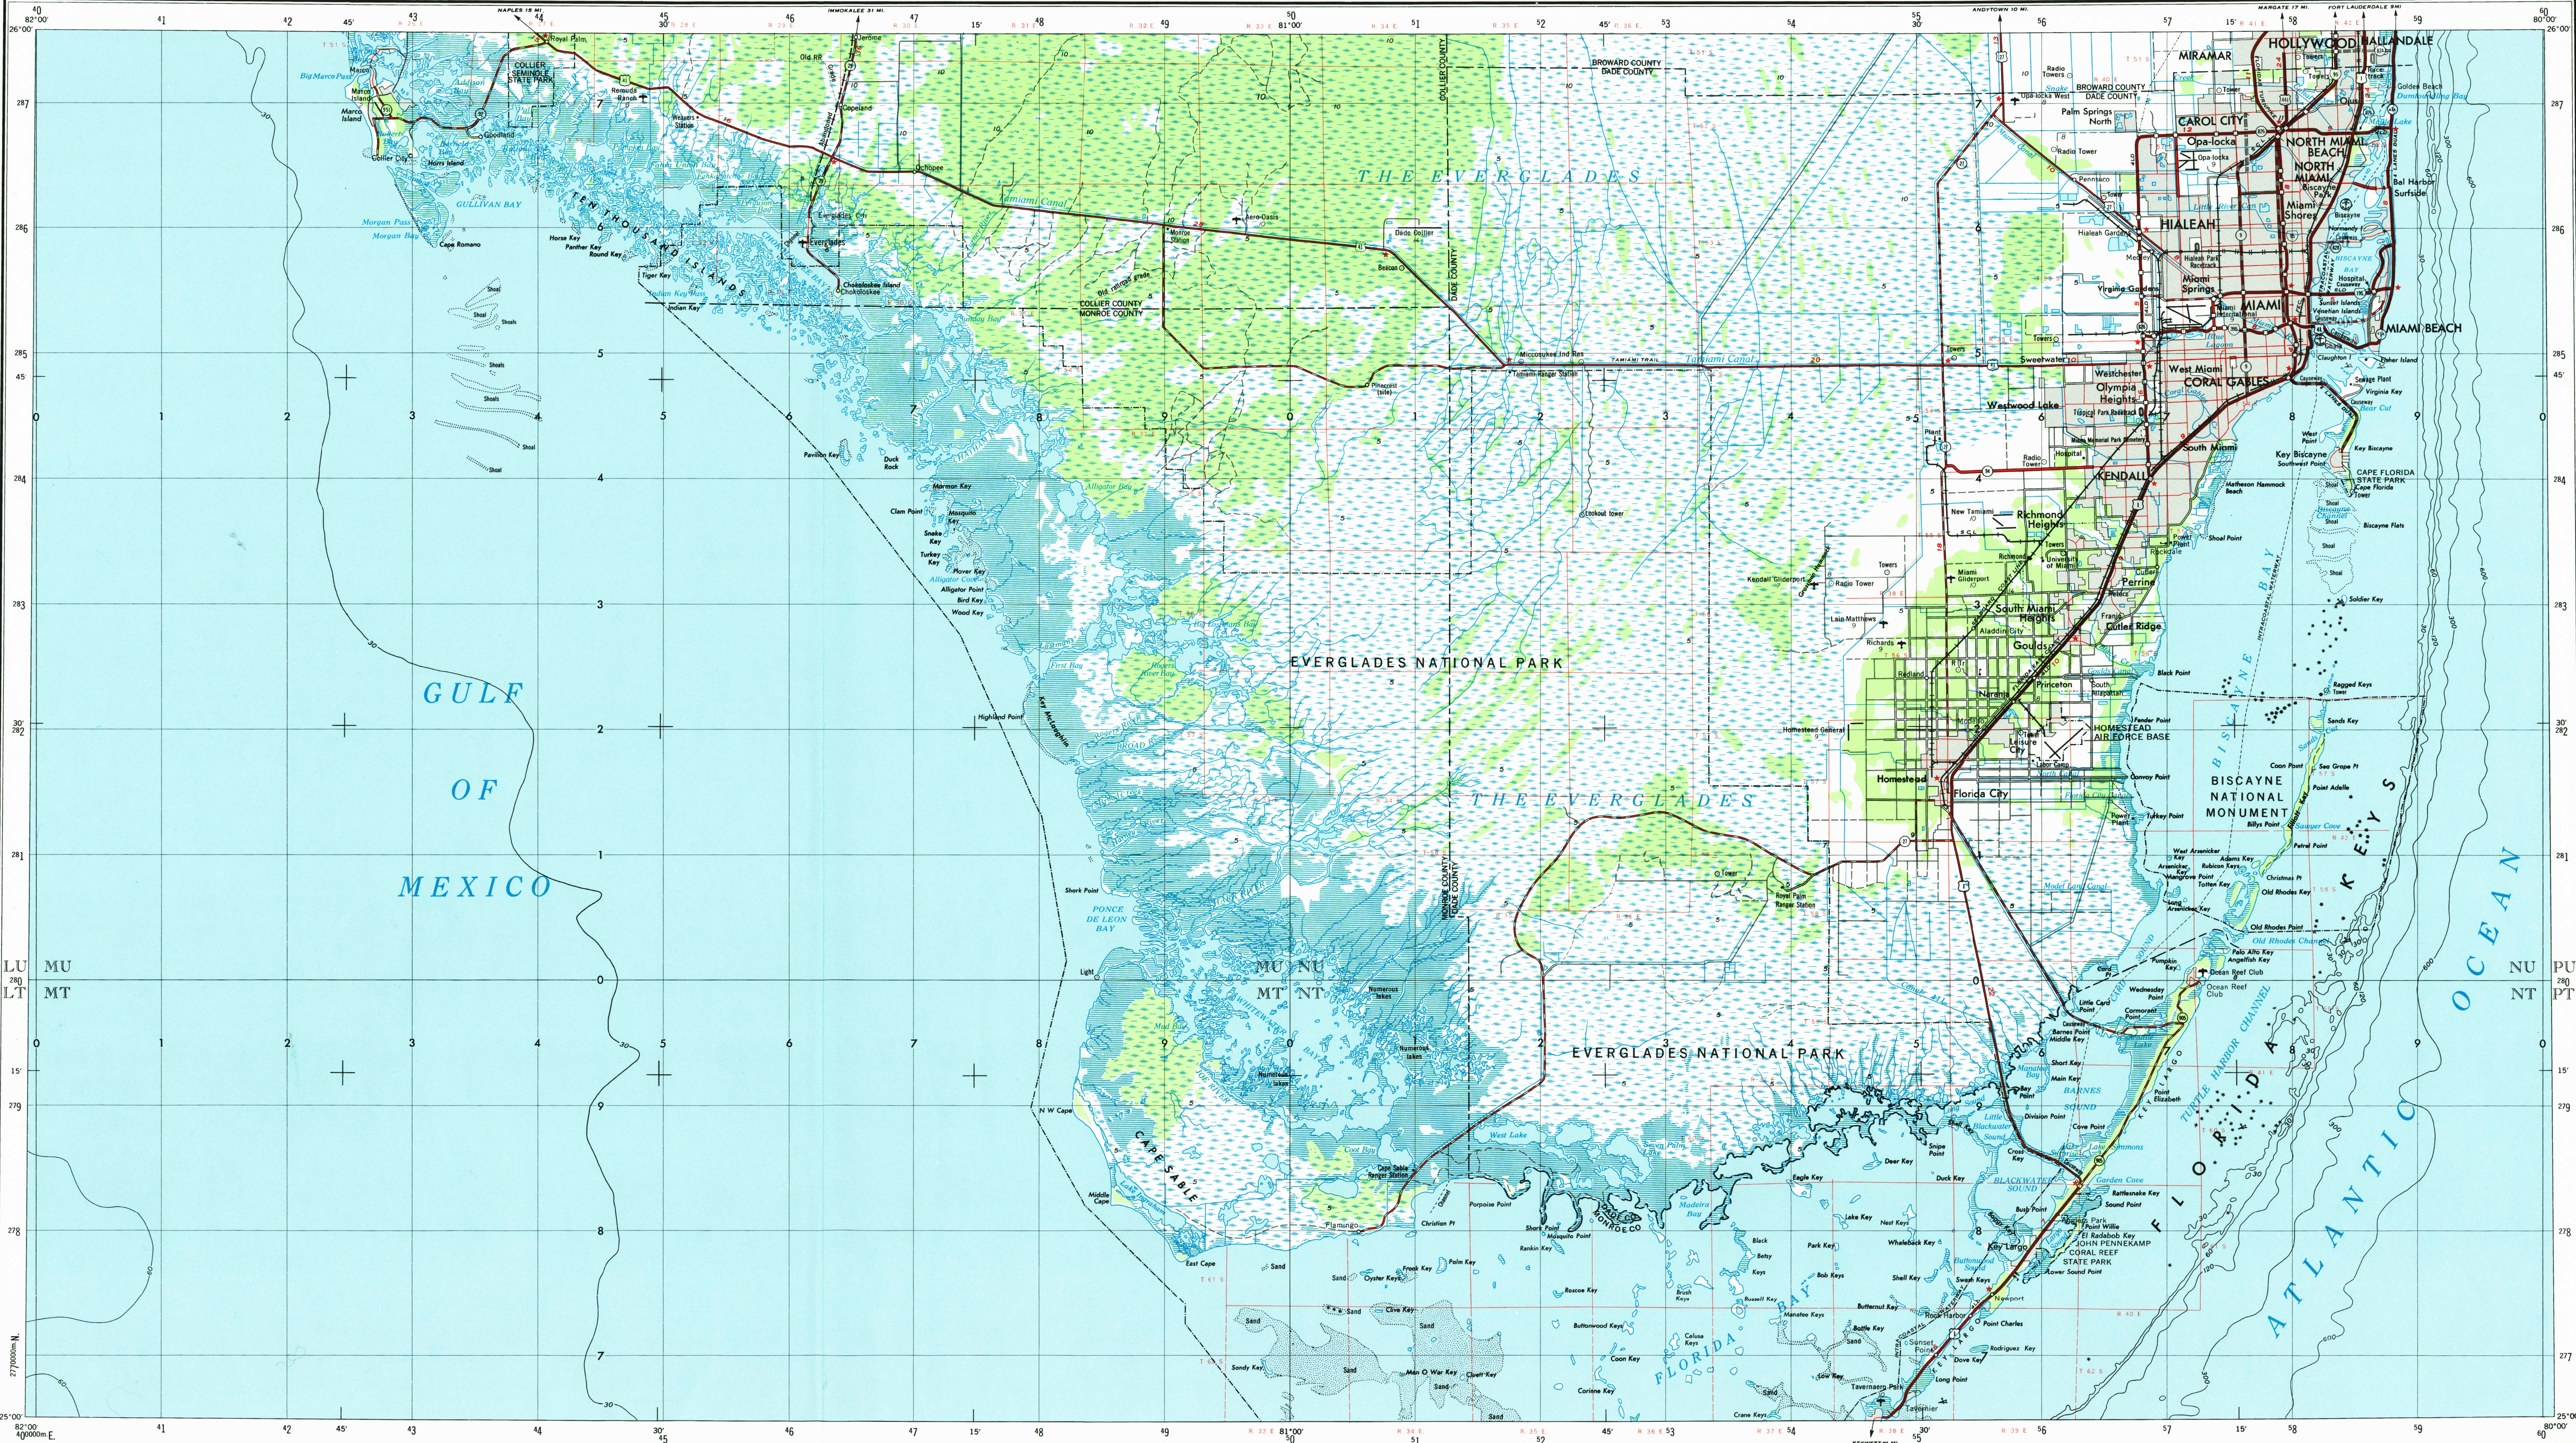

V501, EDITION 3
Prepared by the U.S. Army Topographic Command (KCSX), Washington, D.C. Compiled in 1955 by photogrammetric methods and from United States quadrangles, 1:25,000, 1946-47 and USCGS charts, 1949-56. Planimetry revised in part from aerial photographs taken 1950. Map field checked 1956. Revised in 1971 by the U.S. Geological Survey from aerial photographs taken 1969-70.
Selected hydrographic data compiled from USCGS charts. This information is not intended for navigational purposes.
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

ROADS

- Primary, all-weather, hard surface
- Secondary, all-weather, hard surface
- Light-duty, all-weather, hard or improved surface
- Fair or dry weather, unimproved surface
- Trail
- Interchange

RAILROADS

- Single track
- Double or Multiple track
- Standard gauge
- Narrow gauge

BOUNDARIES

- International
- State
- County
- Park or reservation

Spot elevation in feet

- 221 Woods/brushwood
- Marsh or swamp

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

RAILROADS

- Single track
- Double or Multiple track
- Standard gauge
- Narrow gauge

BOUNDARIES

- International
- State
- County
- Park or reservation

Spot elevation in feet

- 221 Woods/brushwood
- Marsh or swamp

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

RAILROADS

- Single track
- Double or Multiple track
- Standard gauge
- Narrow gauge

BOUNDARIES

- International
- State
- County
- Park or reservation

Spot elevation in feet

- 221 Woods/brushwood
- Marsh or swamp

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers

0 5 10 15 Nautical Miles

MAXIMUM ELEVATION LESS THAN 50 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17


1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 1° 20' MINUTES EASTERLY FOR THE CENTER OF THE WEST EDGE TO 14° 10' MINUTES WESTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C. 20244

USGS NMD HISTORICAL MAP

NOV 17 1986

REC'D FILE COPY

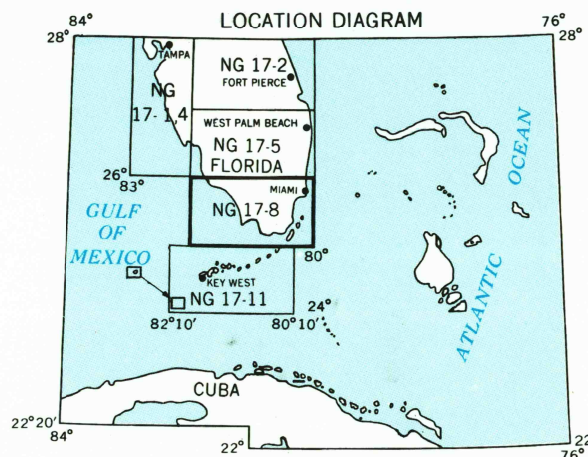

SECTIONIZED TOWNSHIP											
6	5	4	3	2	1						
7	8	9	10	11	12						
18	17	16	15	14	13						
19	20	21	22	23	24						
30	29	28	27	26	25						
31	32	33	34	35	36						

GRID ZONE DESIGNATION:

17R

100,000 M. SQUARE IDENTIFICATION

LU MU NU PU

LT MT NT PT

IGNORE THE SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGE figure of the grid number; example: 2770000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: LOOKOUT TOWER

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line within in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point.

4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line within in the left or right margin, or on the line itself.

5. Estimate tenths from grid line to point.

SAMPLE REFERENCE:

If reporting beyond 10° in any direction, prefix Grid Zone Designation as:

17R020237