




CONVERSION
SCALES

Feet Meters

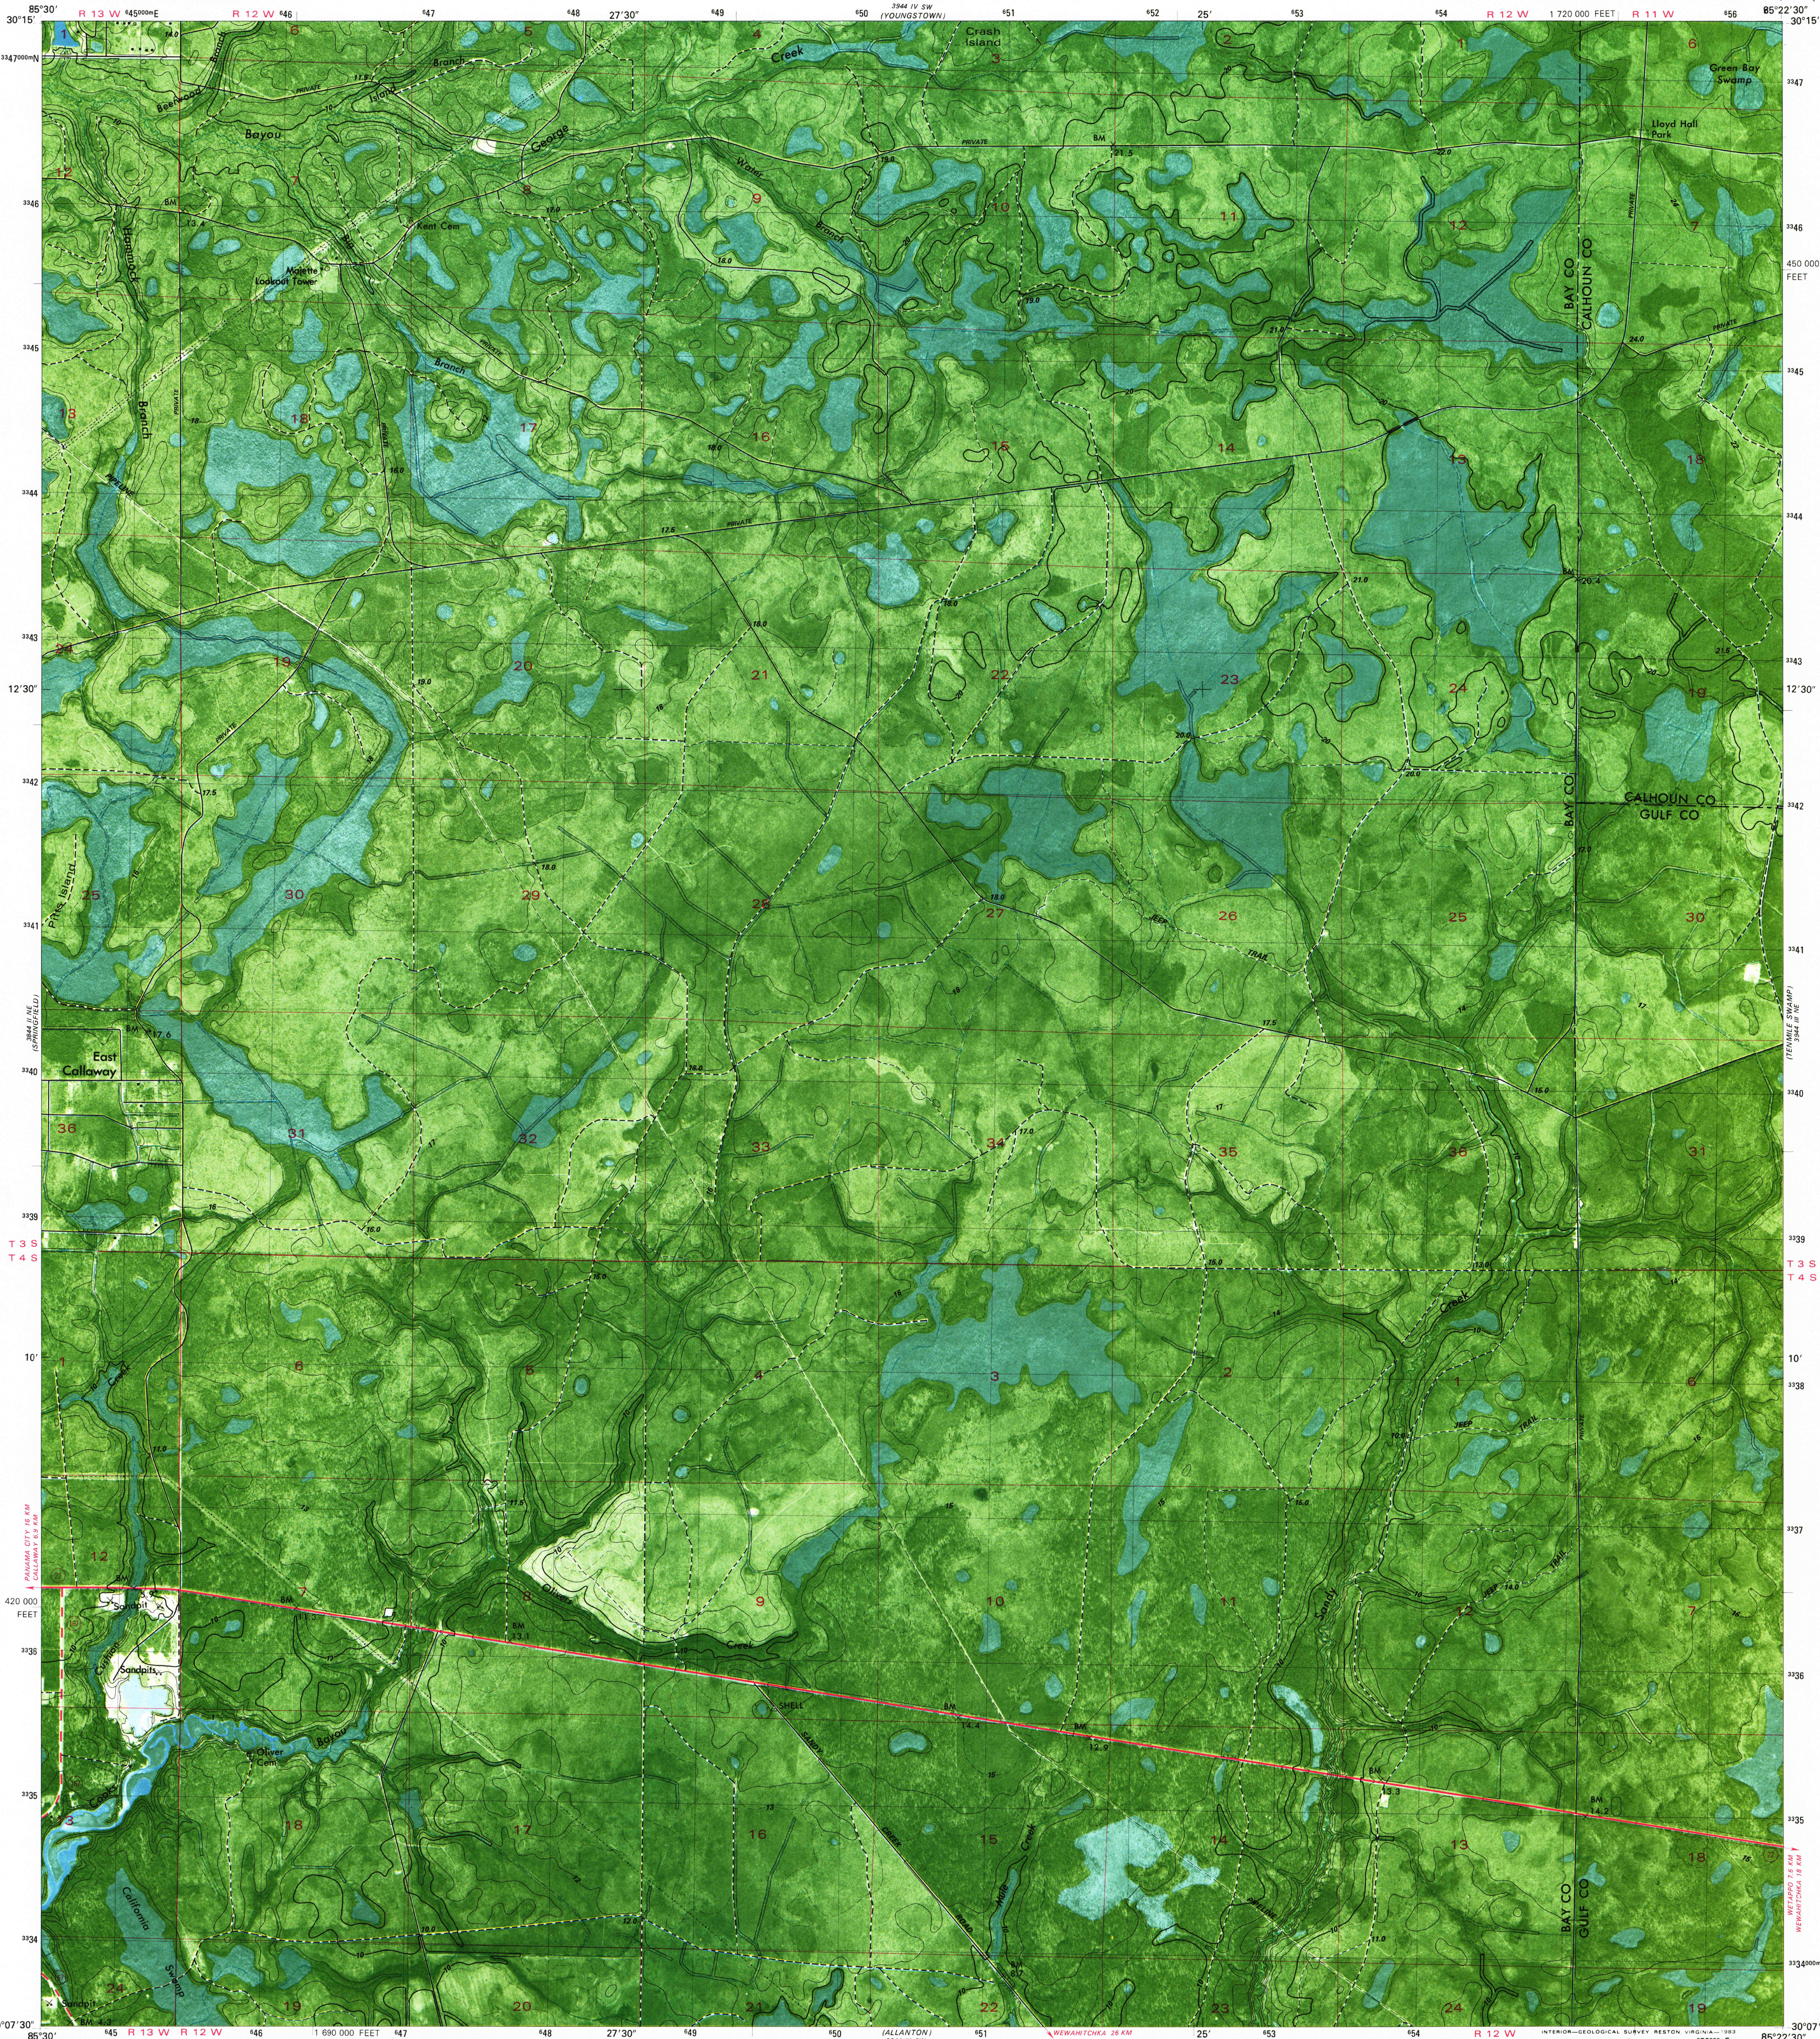

Feet Meters

1	3048
2	6096
3	9144
4	12192
5	15240
6	18288
7	21336
8	24384
9	27432
10	30480



To convert feet to meters
multiply by 3048
To convert meters to feet
multiply by 3.2808

Produced by the United States Geological Survey

Control by USGS and NOS/NOAA

Orthophotomap prepared from aerial photograph taken
January 18, 1976. Compiled by photogrammetric methods
from aerial photographs taken January 1975
Field checked 1976. Map edited 1982
Supersedes topographic map dated 1956

Projection and 10,000-foot grid ticks: Florida coordinate
system, north zone (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 16
1927 North American Datum
To place on the predicted North American Datum 1983
move the projection lines 19 meters south and
7 meters west as shown by dashed corner ticks

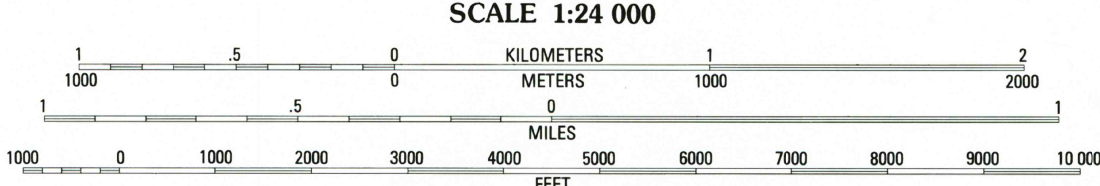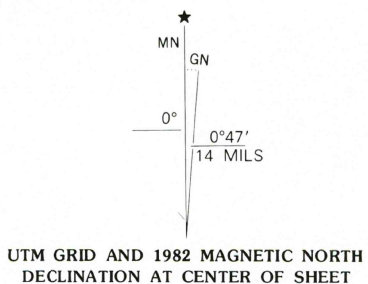


CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

- Primary highway, hard surface
- Secondary highway, hard surface
- Trails
- Interstate Route
- U. S. Route
- County Route
- Light-duty road, hard or improved surface
- Unimproved road

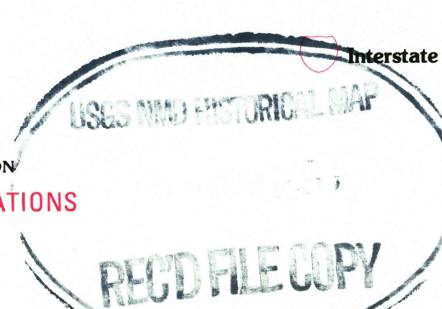

NORTH OF ALLANTON, FLA.
N3007.5 W8522.5/7.5
1982

DMA 3944 III NW-SERIES V8470