





CONVERSION  
SCALES





Feet Meters  
1 3048  
2 6096  
3 9144  
4 12192  
5 15240  
6 18288  
7 21336  
8 24384  
9 27432  
10 30480

To convert feet to meters  
multiply by 3048  
To convert meters to feet  
multiply by 3.2808


1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide



Produced by the United States Geological Survey  
and the National Ocean Service  
Control by USGS and NOS/NOAA  
Orthophotomaps prepared from aerial photographs taken  
January 10, 1976. Compiled by photogrammetric  
methods from aerial photographs taken January 1975  
Field checked 1976. Map edited 1992  
Bathymetry compiled by the National Ocean Service from  
tide-coordinated hydrographic surveys  
This information is not intended for navigational purposes  
Mean low water (dotted) line and mean high water (solid) line  
compiled by NOS from tide-coordinated aerial photographs  
Apparent shoreline (outer edge of vegetation) shown  
by photomaps  
Projection and 10,000-foot grid ticks: Florida coordinate  
system, north zone (Lambert conformal conic)  
1000-meter Universal Transverse Mercator grid, zone 16  
1927 North American Datum  
The difference between 1927 North American Datum and North  
American Datum of 1983 (NAD 83) for 7.5-minute intersections  
is given in USGS Bulletin 1875. The NAD 83 is shown by  
dashed corner ticks  
There may be private inholdings within the boundaries of  
the National or State reservations shown on this map  
Photorevised from 1990 source; no major culture or drainage  
changes observed. Boundaries revised and names verified 1992

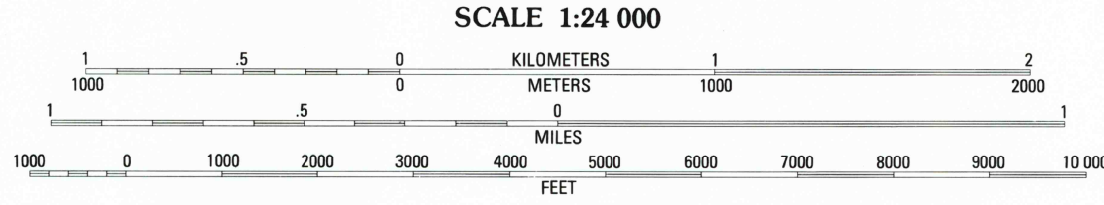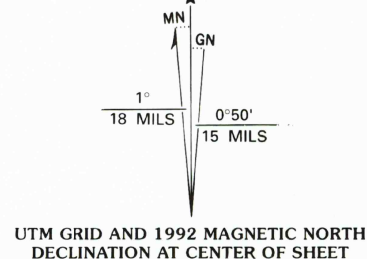

CONTOUR INTERVAL 2 METERS  
SUPPLEMENTARY CONTOUR INTERVAL 1 METER  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER  
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER  
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY  
0.5 METER CONTOURS - DATUM IS MEAN LOWER LOW WATER  
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE  
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER  
BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC  
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS  
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY  
FOR SALE BY U. S. GEOLOGICAL SURVEY  
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092  
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

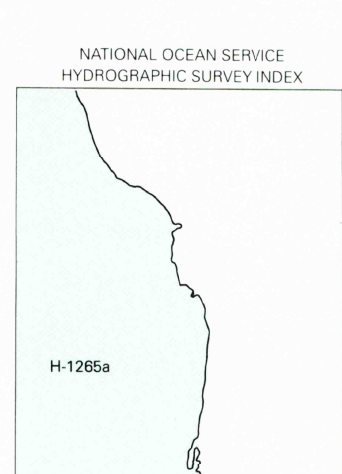

ROAD CLASSIFICATION  
Primary highway, hard surface  
Secondary highway, hard surface  
Trails  
Interstate Route  
U. S. Route  
State Route  
Light-duty road, hard or improved surface  
Unimproved road

CONTOURS AND ELEVATIONS  
IN METERS

PORT ST. JOE, FLA.  
29085-G3-TB-024  
1982  
MINOR REVISION 1992  
DMA 3943 IV SE-SERIES V8470

