





Produced by the United States Geological Survey
Topography compiled 1959 and 1960. Planimetry derived from imagery taken 1966. Survey control current as of 1963. Contours that conflict with updated major features are dashed.
North American Datum of 1983 (NAD 83). Projection and 1000-meter grid: Universal Transverse Mercator, zone 4 10 000-foot ticks: Hawaii Coordinate System of 1983 (zone 4).
Old Hawaiian Datum is shown by dashed corner ticks. The values of the shift between NAD 83 and Old Hawaiian Datum for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

UTM GRID AND 1998 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

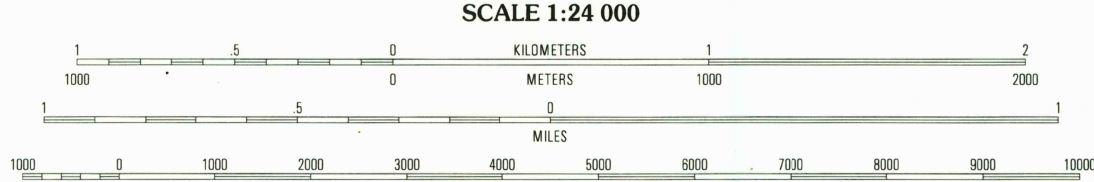

CONTOUR INTERVAL 40 FEET
SUPPLEMENTARY CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER
THE MEAN RANGE OF TIDE IS APPROXIMATELY 1 FOOT
THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION

1	2	3
4	5	6
7	8	9

ADJOINING 7.5' QUADRANGLE NAMES

RECEIVED
MAR 31 1999
USGS NMD
HISTORICAL MAP ARCHIVES
ANAHOLA, HI
1996
NIMA 5122 III NW-SERIES W833

ROAD CLASSIFICATION

Primary highway
hard surface
Secondary highway
hard surface
Interstate Route
U.S. Route
State Route

Light-duty road, hard or
improved surface
Unimproved road
Light-duty road, hard or
improved surface
Unimproved road