



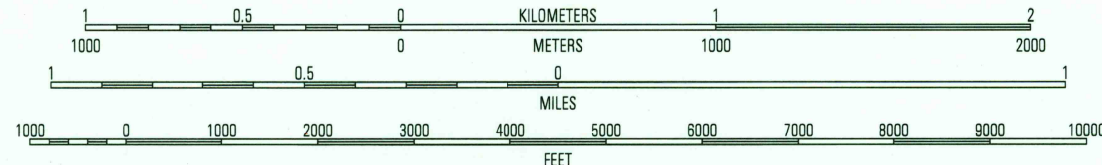

Produced by the United States Geological Survey
in cooperation with National Imagery and
Mapping Agency
Topography compiled 1954. Planimetry derived from imagery
taken 1996. Survey control current as of 1959
North American Datum of 1983 (NAD 83). Projection and
1 000-meter grid: Universal Transverse Mercator, zone 4
10 000-foot ticks: Hawaii Coordinate System of 1983 (zone 1)
Old Hawaiian Datum is shown by dashed corner ticks
The values of the shift between Old Hawaiian Datum
and NAD 83 for 7.5-minute intersections are obtainable
from National Geodetic Survey NADCON software
There may be private inholdings within the boundaries of
the National or State reservations shown on this map



CONTOUR INTERVAL 40 FEET
SUPPLEMENTARY CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048
THE MEAN RANGE OF TIDE IS APPROXIMATELY 1 FOOT

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

QUADRANGLE LOCATION

1	2	3	4	5	6	7	8
1	2	3	4	5	6	7	8

ADJOINING 7.5 QUADRANGLE NAMES



ROAD CLASSIFICATION

Primary highway
hard surface
Secondary highway
hard surface
Unimproved road

Light-duty road, hard or
improved surface
U.S. Route
State Route

KEAHOLE POINT, HI
1996

NIMA 5717 II SE-SERIES W833

