



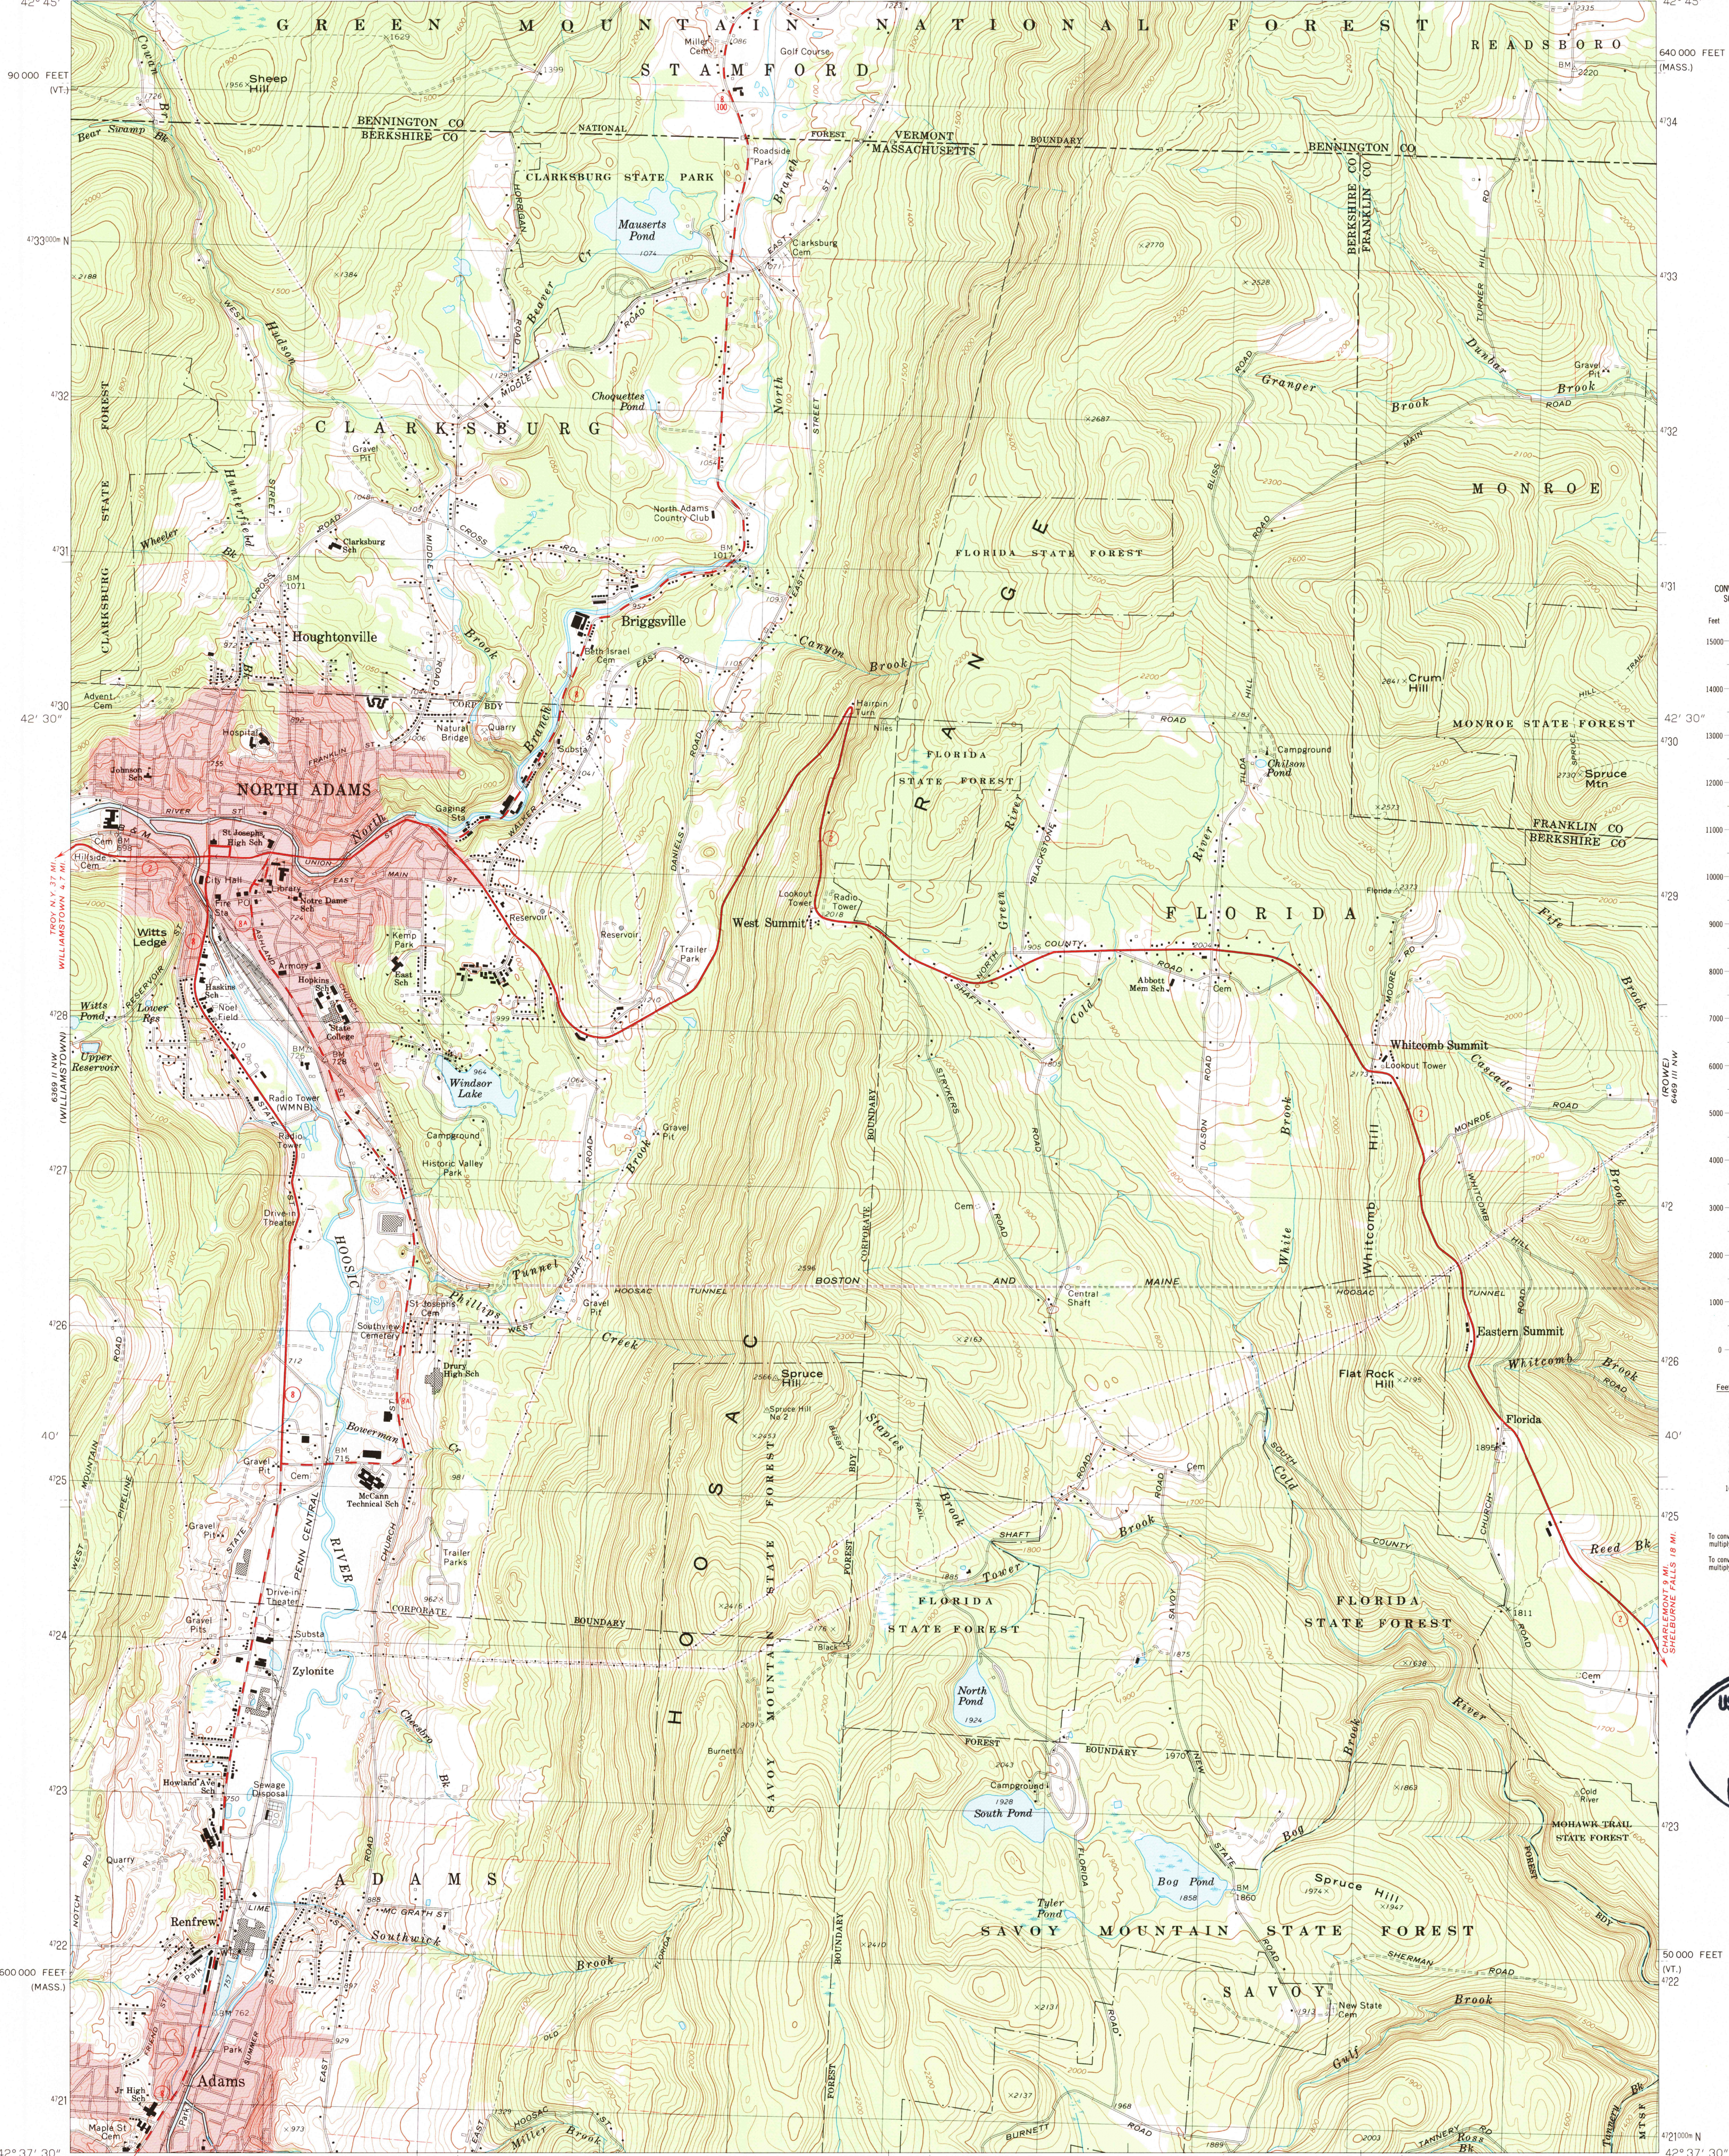

CONVERSION SCALES

| Feet  | Meters |
|-------|--------|
| 15000 | 4500   |
| 14000 | 4000   |
| 13000 | 3500   |
| 12000 | 3000   |
| 11000 | 2500   |
| 10000 | 2000   |
| 9000  | 1500   |
| 8000  | 1000   |
| 7000  | 700    |
| 6000  | 500    |
| 5000  | 300    |
| 4000  | 200    |
| 3000  | 100    |
| 2000  | 50     |
| 1000  | 25     |
| 500   | 12.5   |
| 200   | 5      |
| 100   | 2.5    |
| 0     | 0      |

To convert feet to meters multiply by 0.3048  
To convert meters to feet multiply by 3.2808

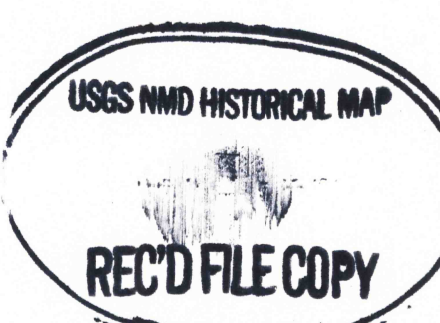

Mapped, edited, and published by the Geological Survey  
Control by USGS, USC&GS, and Massachusetts Geodetic Survey  
Planimetry by photogrammetric methods from aerial photographs taken 1942. Topography by planimetric surveys 1944. Revised from aerial photographs taken 1972. Field checked 1973  
Polyconic projection. 1927 North American datum  
10,000-foot grids based on Massachusetts coordinate system, mainland zone, and Vermont coordinate system  
1000-meter Universal Transverse Mercator grid, zone 18  
Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked  
Red tint indicates areas in which only landmark buildings are shown

UTM GRID AND 1973 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

14° 24' 11" N  
11° 19' 23" N

249 MILS  
23 MILS

1 1000 0 1000 2000 3000 4000 5000 6000 7000 FEET  
1 KILOMETER

CONTOUR INTERVALS 10 AND 20 FEET (SEE DIAGRAM)  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

ROAD CLASSIFICATION  
Primary highway, hard surface  
Secondary highway, hard surface  
Light-duty road, hard or improved surface  
Unimproved road  
Interstate Route  
U. S. Route  
State Route

QUADRANGLE LOCATION

NORTH ADAMS, MASS.-VT.  
N4237 5-W7300/7.5

1973

AMS 6369 II NE-SERIES V814