



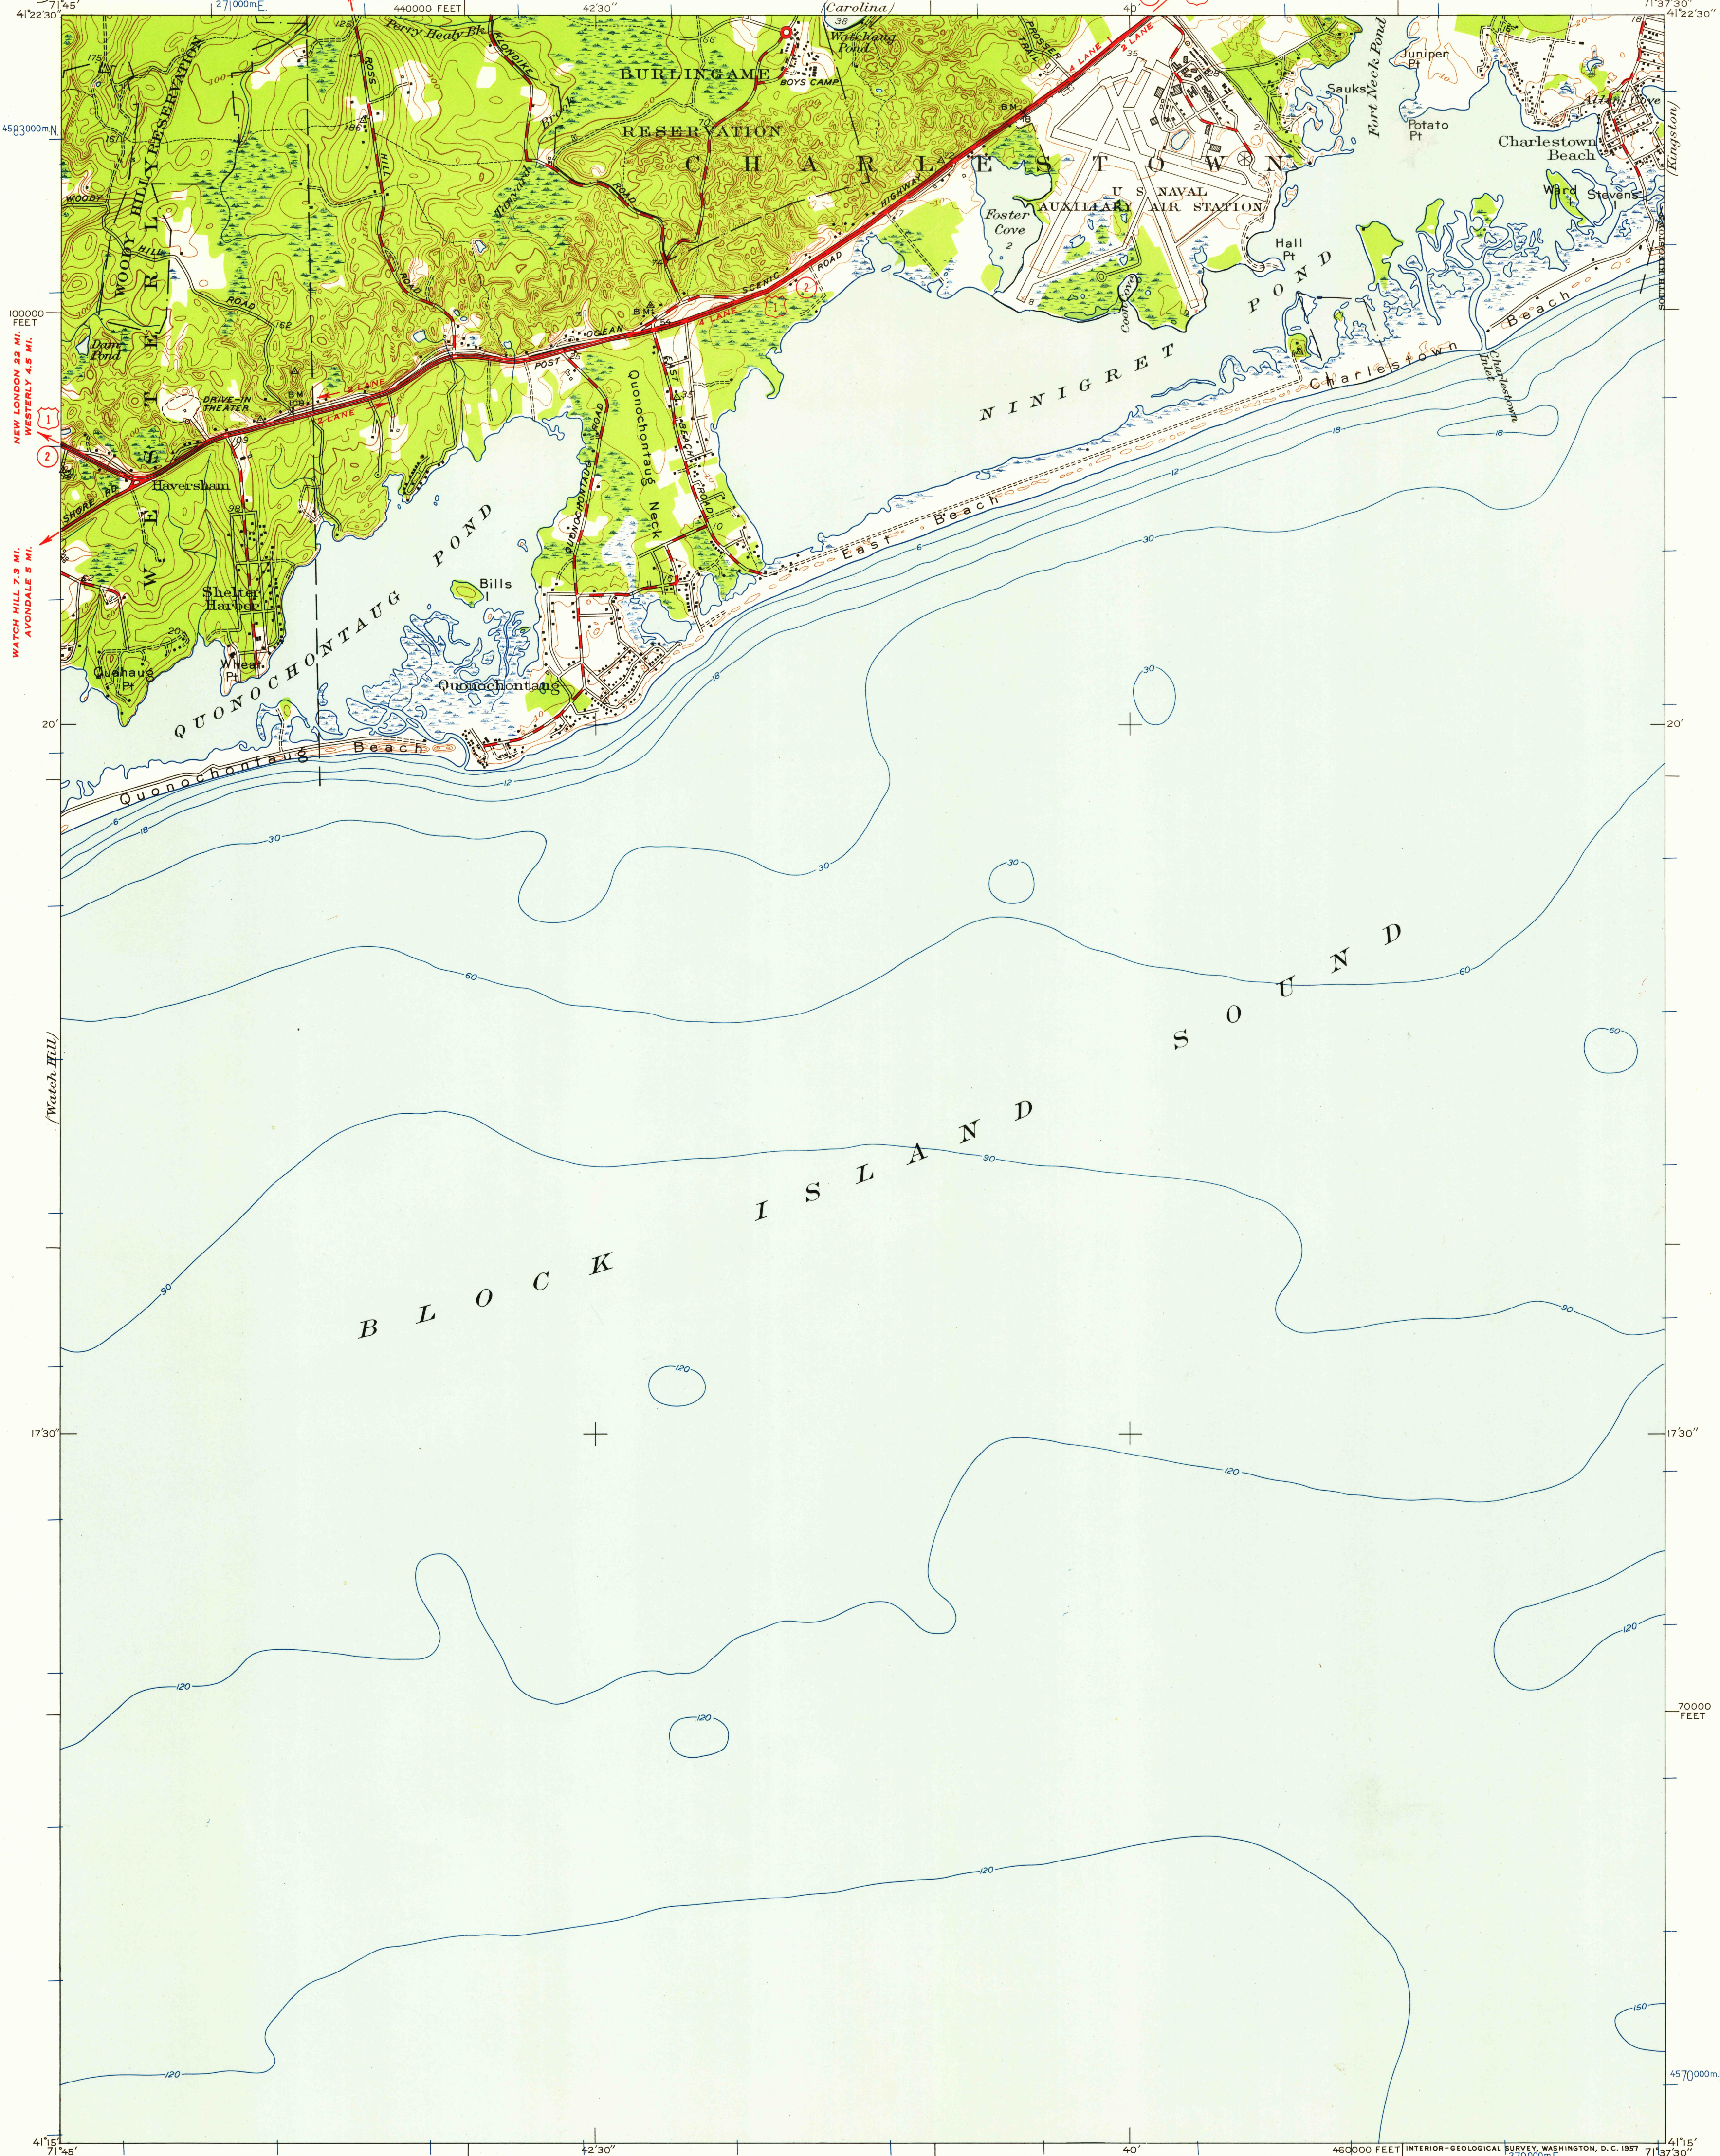

Topography by W.D. Leach and G.R. Sawyer
Surveyed in 1942
Revised in 1953

APPROXIMATE MEAN
DECLINATION, 1953

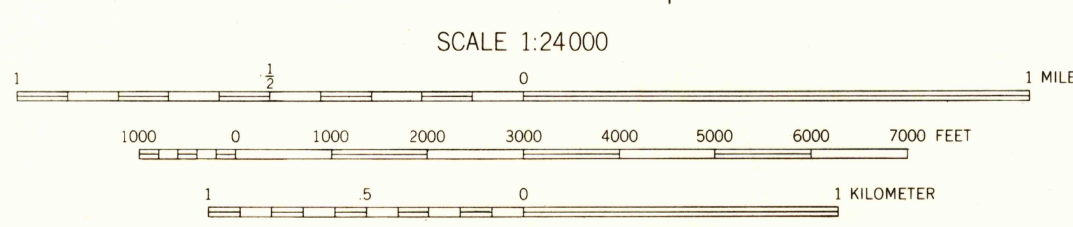

DEPTH CURVES IN FEET—DATUM IS MEAN LOW WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER
THE AVERAGE RANGE OF TIDE IS APPROXIMATELY 3 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION

ROAD CLASSIFICATION
Heavy-duty — 4 LANE 6 LANE Light-duty —
Medium-duty — 4 LANE 6 LANE Unimproved dirt —
U. S. Route State Route

Polyconic projection. 1927 North American datum
10,000-foot grid based on Rhode Island
rectangular coordinate system
1,000-meter Universal Transverse Mercator
grid ticks, zone 19, shown in blue

QUONOCONTAUG, R.I.
N4115-W7137.5/7.5

1953

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

JUL - 2 1957

2635