
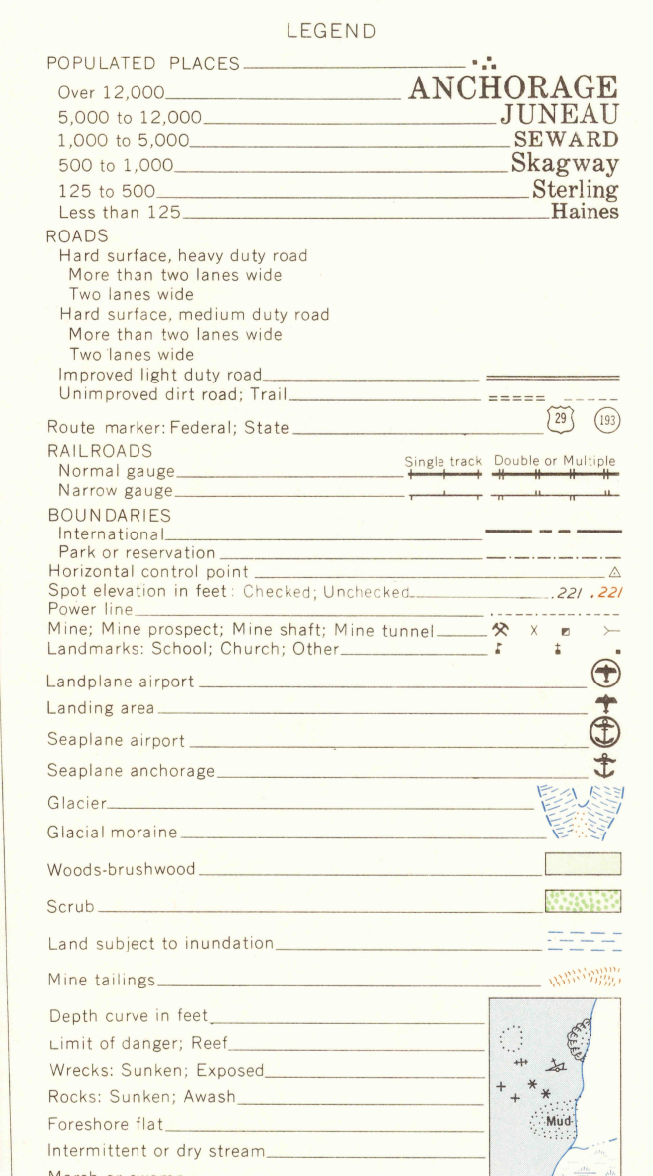


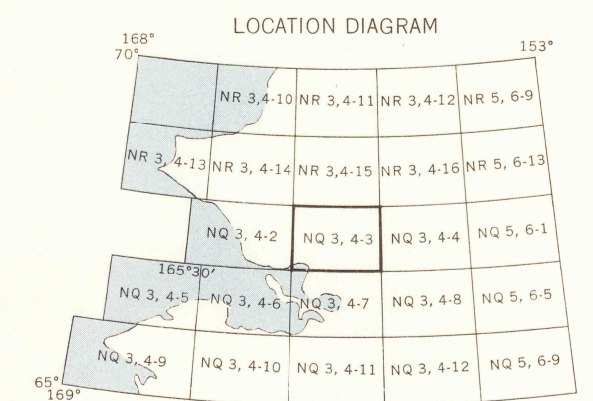


Q501
Edition 2-AMS

Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Baird Mountains, 1956. Original map compiled from Army Map Service, Alaska 1:50,000 series, 1955, and from U.S. Geological Survey, Alaska 1:50,000 series, 1955. Topography compiled by photogrammetric methods. Aerial photography 1955-1956. Field annotated 1956. Control by USGS, USC&GS and USCE. Map not field checked.

1960 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 190° 180' MILS EASTERNLY FOR THE CENTER OF THE WEST EDGE TO 22° 390' MILS EASTERNLY FOR THE CENTER OF THE EAST EDGE.

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

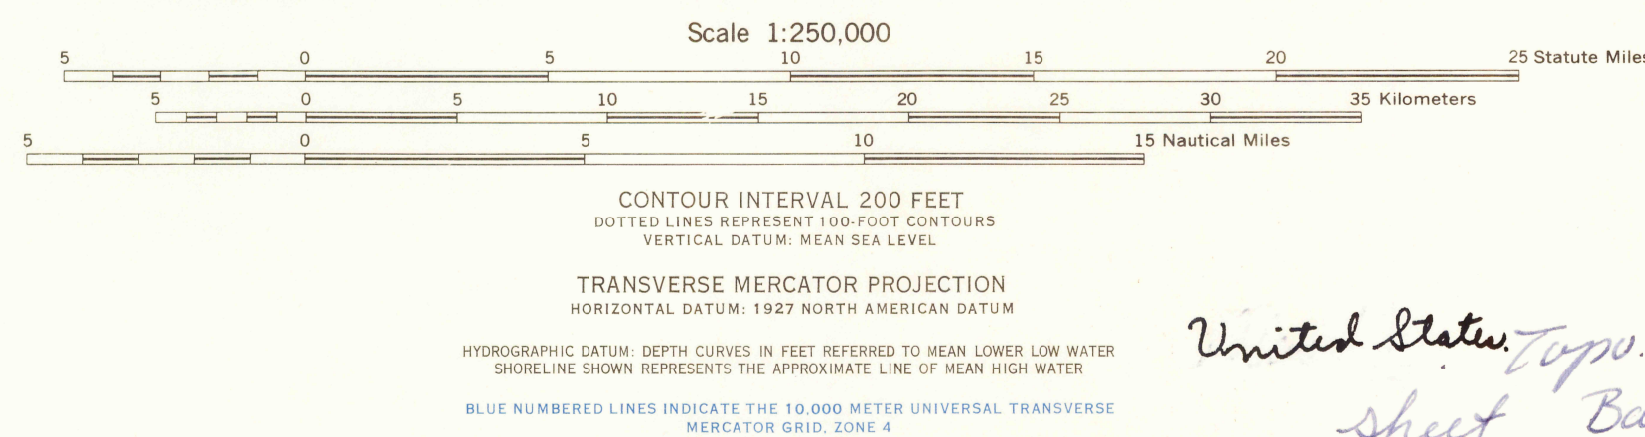


SX 6-65 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION: 4W		TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS	
100,000 M. SQUARE IDENTIFICATION		SAMPLE POINT: CABIN	
CL	DL	1. Read letters identifying 100,000 meter square in which the point lies	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line with in the top or bottom margin, or on the line itself
CK	DK	3. Estimate tenths from grid line to point	4. Estimate tenths from grid line to point
40	50	5. Locate first HORIZONTAL grid line below point and read LARGE figure labeling the line either in the left or right margin, or on the line itself	6. Estimate tenths from grid line to point
IGNORE THE SMALLEST figures of any grid number; there are for stating the full coordinates. Use ONLY the LARGEST figure of the grid number; example 7430000		SOURCE: REFERENCE: 4W02254	
If reading beyond 10° in any direction, prefix Grid Zone Designation, as:		4W02254	

United States Topo. 1:250,000
sheet Baird Mts. 1405
cop. 1.

BAIRD MOUNTAINS, ALASKA

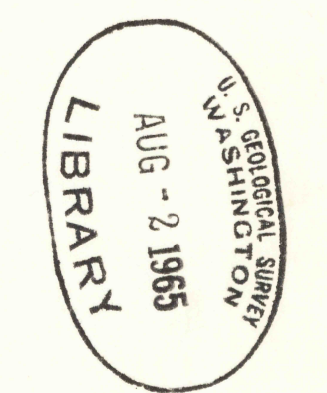

STOCK NO. Q501XNQ343