
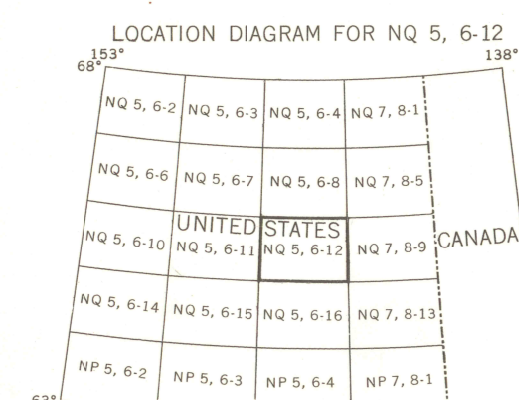


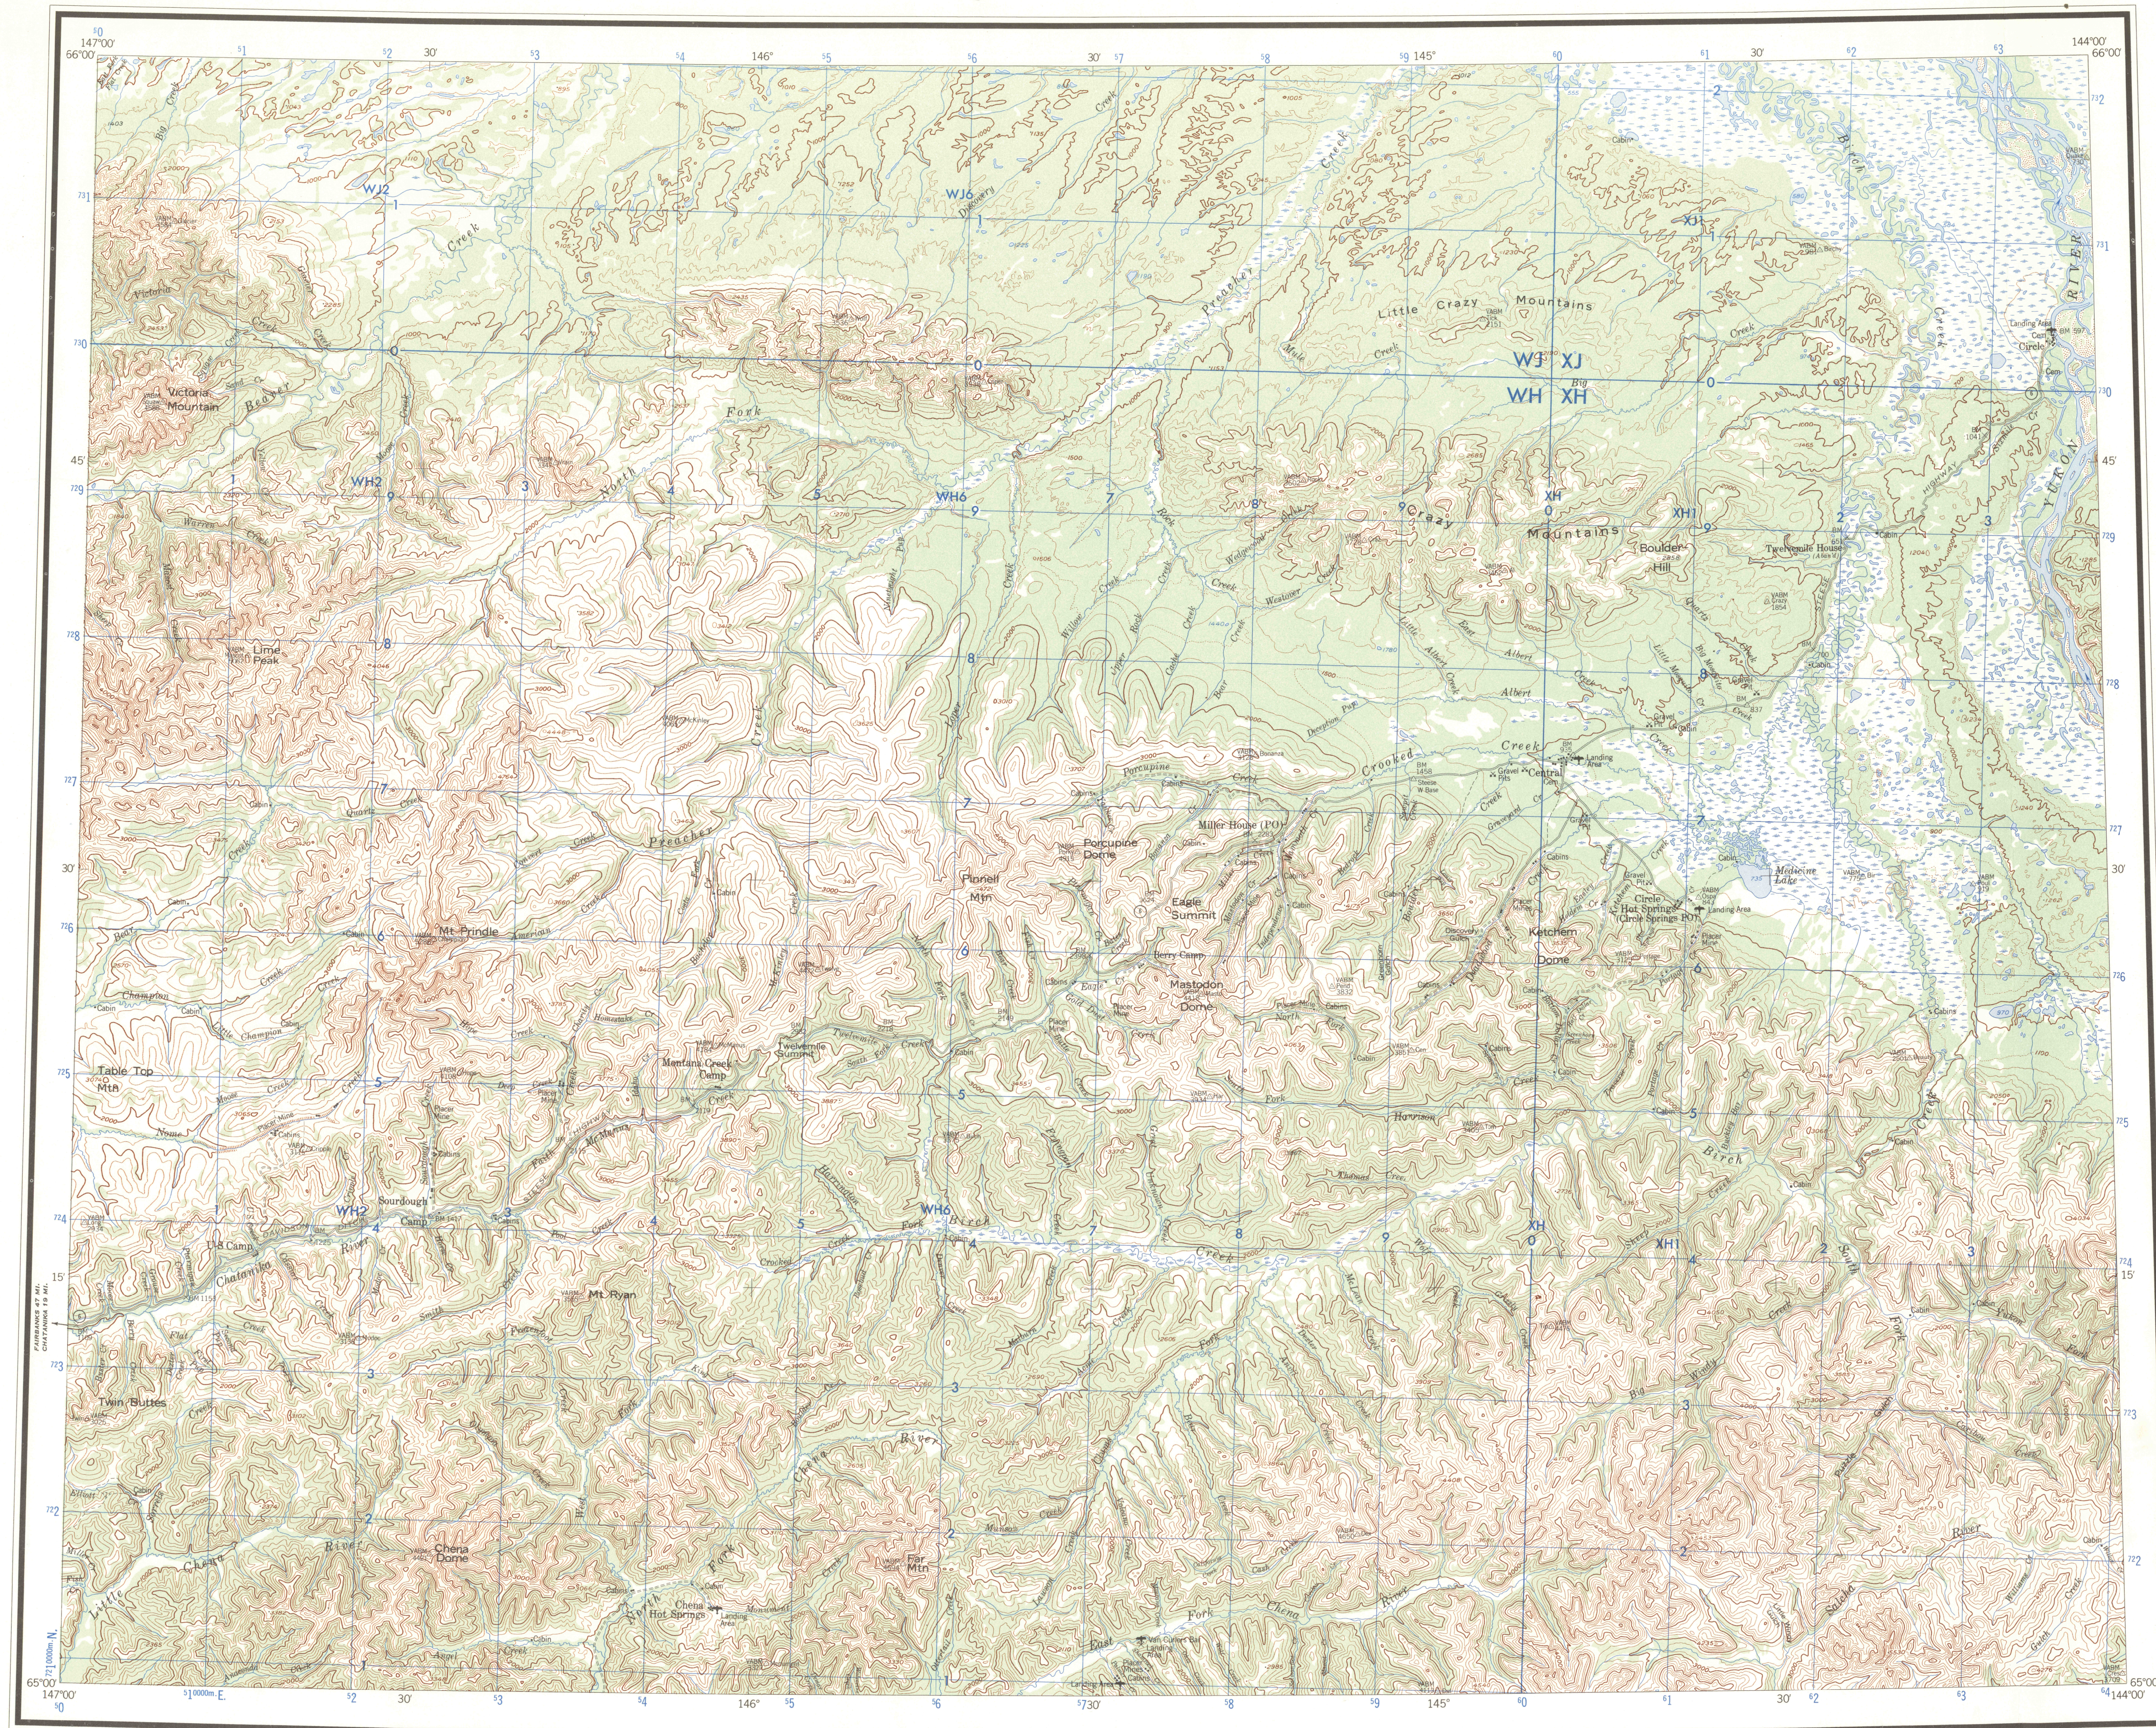


LEGEND

POPULATED PLACES	ANCHORAGE
Over 12,000	JUNEAU
5,000 to 12,000	SEWARD
1,000 to 5,000	SKAGWAY
500 to 1,000	Sterling
125 to 500	Haines
Less than 125	
ROADS	
Hard surface, heavy duty road	
More than two lanes wide	
Two lanes wide	
Hard surface, medium duty road	
More than two lanes wide	
Two lanes wide	
Improved light duty road	
Unimproved dirt road, Trail	
RAILROADS	
Normal gauge	
Narrow gauge	
BOUNDARIES	
International	
Park or reservation	
Horizontal control point	
Spot elevation in feet: Checked; Unchecked	
Power line	
Mine: Mine prospect; Mine shaft; Mine tunnel	
Landmark: School; Church; Other	
Landplane airport	
Landing area	
Seaplane airport	
Seaplane anchorage	
Glacier	
Glacial moraine	
Woods-brushwood	
Scrub	
Land subject to inundation	
Mine tailings	
Depth curve in feet	
Limit of danger; Reef	
Wrecks: Sunk; Exposed	
Rocks: Sunk; Awa	
Foreshore flat	
Intermittent or dry stream	
Marsh or swamp	

LIBRARY
AUG - 2 1965
U.S. GEOLOGICAL SURVEY
WASHINGTON

Q501
Edition 2-AMS, First Printing
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1963 from Alaska 1:250,000, USGS, Circle, 1955. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, 1952 and 1955. Control by USGS and USC&GS. Map not field checked.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 20°15' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 31°10' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°03' WESTERLY.
USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

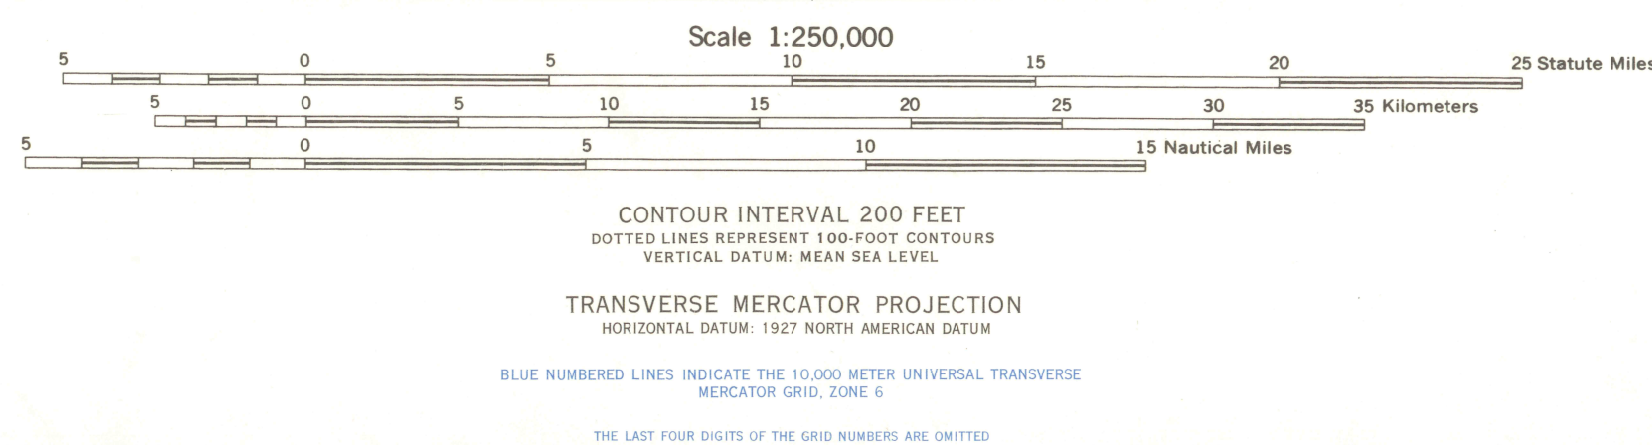

SX 8-64 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION:	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
100,000 M. SQUARE IDENTIFICATION	SAMPLE POINT: CABIN
WJ WH XJ XH	WH 6 6 3
1. Read letters identifying 100,000 meter square in which the point lies. 2. Locate four VERTICAL grid line to LEFT of point and read LARGE figure labeling the line nearest to the top or bottom margin, or on the line itself. Estimate tenths from grid line to point. 3. Locate four HORIZONTAL grid line BELOW point and read LARGE figure labeling the line nearest to the left or right margin, or on the line itself. Estimate tenths from grid line to point.	SAMPLE REFERENCE If reading nearest 10' in any direction, prefix Grid Zone Designation, as: 6WH6463

1964
United States Topo. 1:250,000.
sheet Circle, 1964,
cop. 1.

STOCK NO. Q501XNQ5612

CIRCLE, ALASKA