



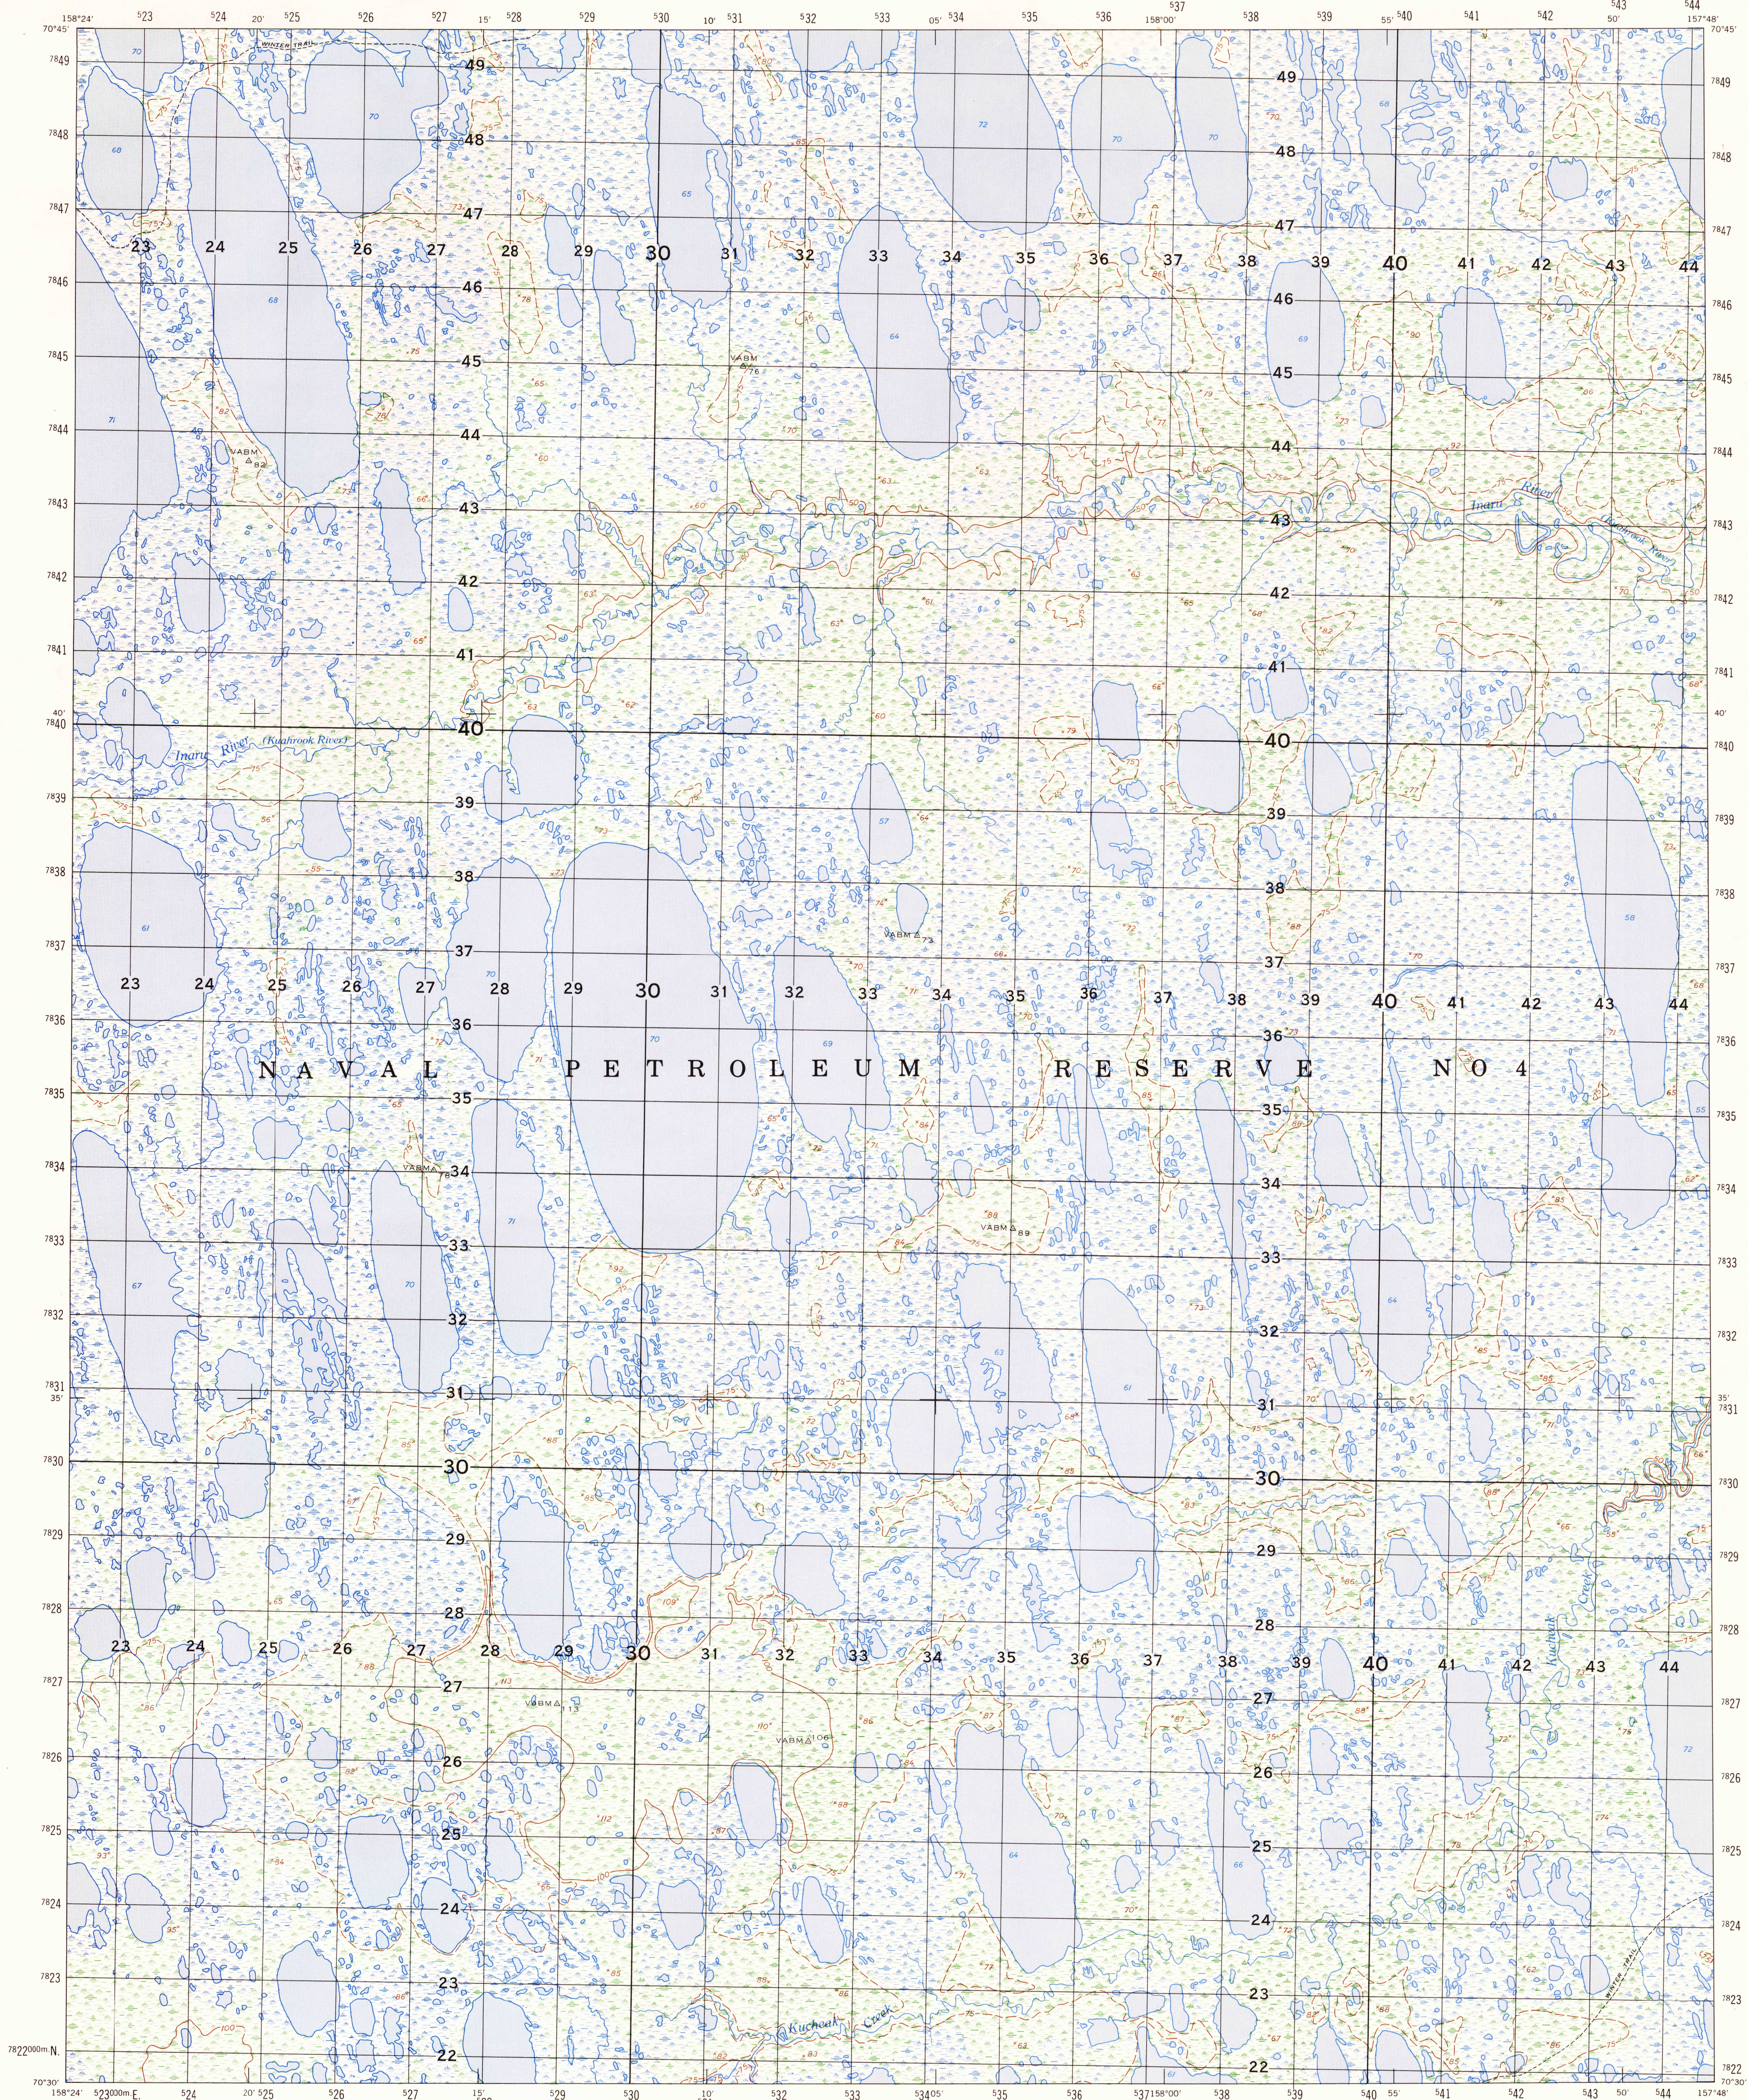

Q701
Edition 1-AMS (First Printing, 2-62)

Prepared by the Army Map Service (ASAM), Corps of Engineers, U. S. Army, Washington, D. C.
Compiled in 1959 by photogrammetric methods. Aerial photography July-August 1955. Horizontal
and vertical control by USCGS and 660th Engr Bn (Base Topo). Photography partially field anno-
tated 1955.

LEGEND	
ROAD DATA 1955	
ROADS	RAILROADS
Hard surface, heavy duty, four or more lanes wide	Standard gauge (4'8 1/2")
Hard surface, heavy duty, two lanes wide; Three lanes wide	Narrow gauge (3')
Hard surface, medium duty, four or more lanes wide	In street
Hard surface, medium duty, two lanes wide; Three lanes wide	Horizontal control point
Improved, light duty	Bench mark, monumented
Unimproved dirt	Spot elevations in feet: Checked; Unchecked
Trail	Bench mark, non-monumented
BOUNDARIES	Glacier
National	Woods-brushwood; Scrub
Reservation	Swamp or marsh
Buildings	Large rapids; Large falls
School; Church	Soundings in fathoms
Mine; Vertical shaft; Horizontal shaft; Open pit	Depth curves in fathoms
Prospect	Foreshore flat
Distorted surface; Mine tailings	Rocks: Bare or washed; Sunken
	Limit of danger; Reef

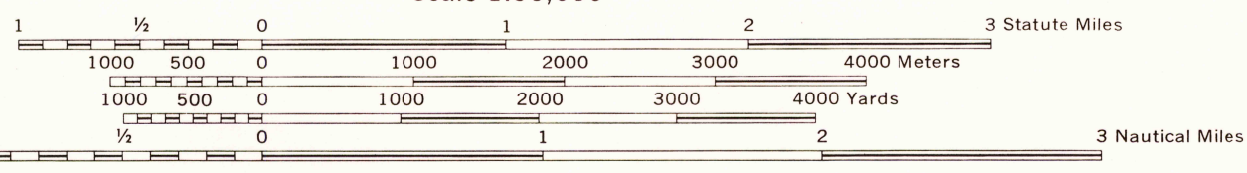

CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
VERTICAL DATUM: APPROXIMATE MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 4
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

GRID ZONE DESIGNATION: 4W	
100,000 M. SQUARE IDENTIFICATION	
EP	
IGNORE THE SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figures of the grid number; example: 7822000	
TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS	
SAMPLE POINT: VABM 106	
1. Read letters identifying 100,000 meter square in which the point lies.	
2. Locate first VERTICAL grid line to LEFT of point and read LARGER figures labeling the line either in the top or bottom margin, or on the line itself.	
3. Estimate tenths from grid line to point.	
4. Locate first HORIZONTAL grid line BELOW point and read LARGER figures labeling the line either in the left or right margin, or on the line itself.	
5. Estimate tenths from grid line to point.	
SAMPLE REFERENCE:	EP32363
If reporting beyond 10° in any direction, prefix Grid Zone Designation, as:	

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH
ADD G-M ANGLE
TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH
SUBTRACT G-M ANGLE

GRID CONVERGENCE
0°51' 11.5 MILS
FOR CENTER OF SHEET

1960 ANNUAL MAGNETIC
CHANGE IS NEGLIGIBLE

2-62 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS
GW

INDEX TO ADJOINING SHEETS			
1762 IV	1762 I	1862 IV	
1762 III	1762 II	1862 III	
1761 IV	1761 I	1861 IV	

Sheet 1762 II falls within NR 3, 4, 8, 0501,
1:250,000

FILE COPY
OCT 4 1962
MAP INFORMATION CENTER