
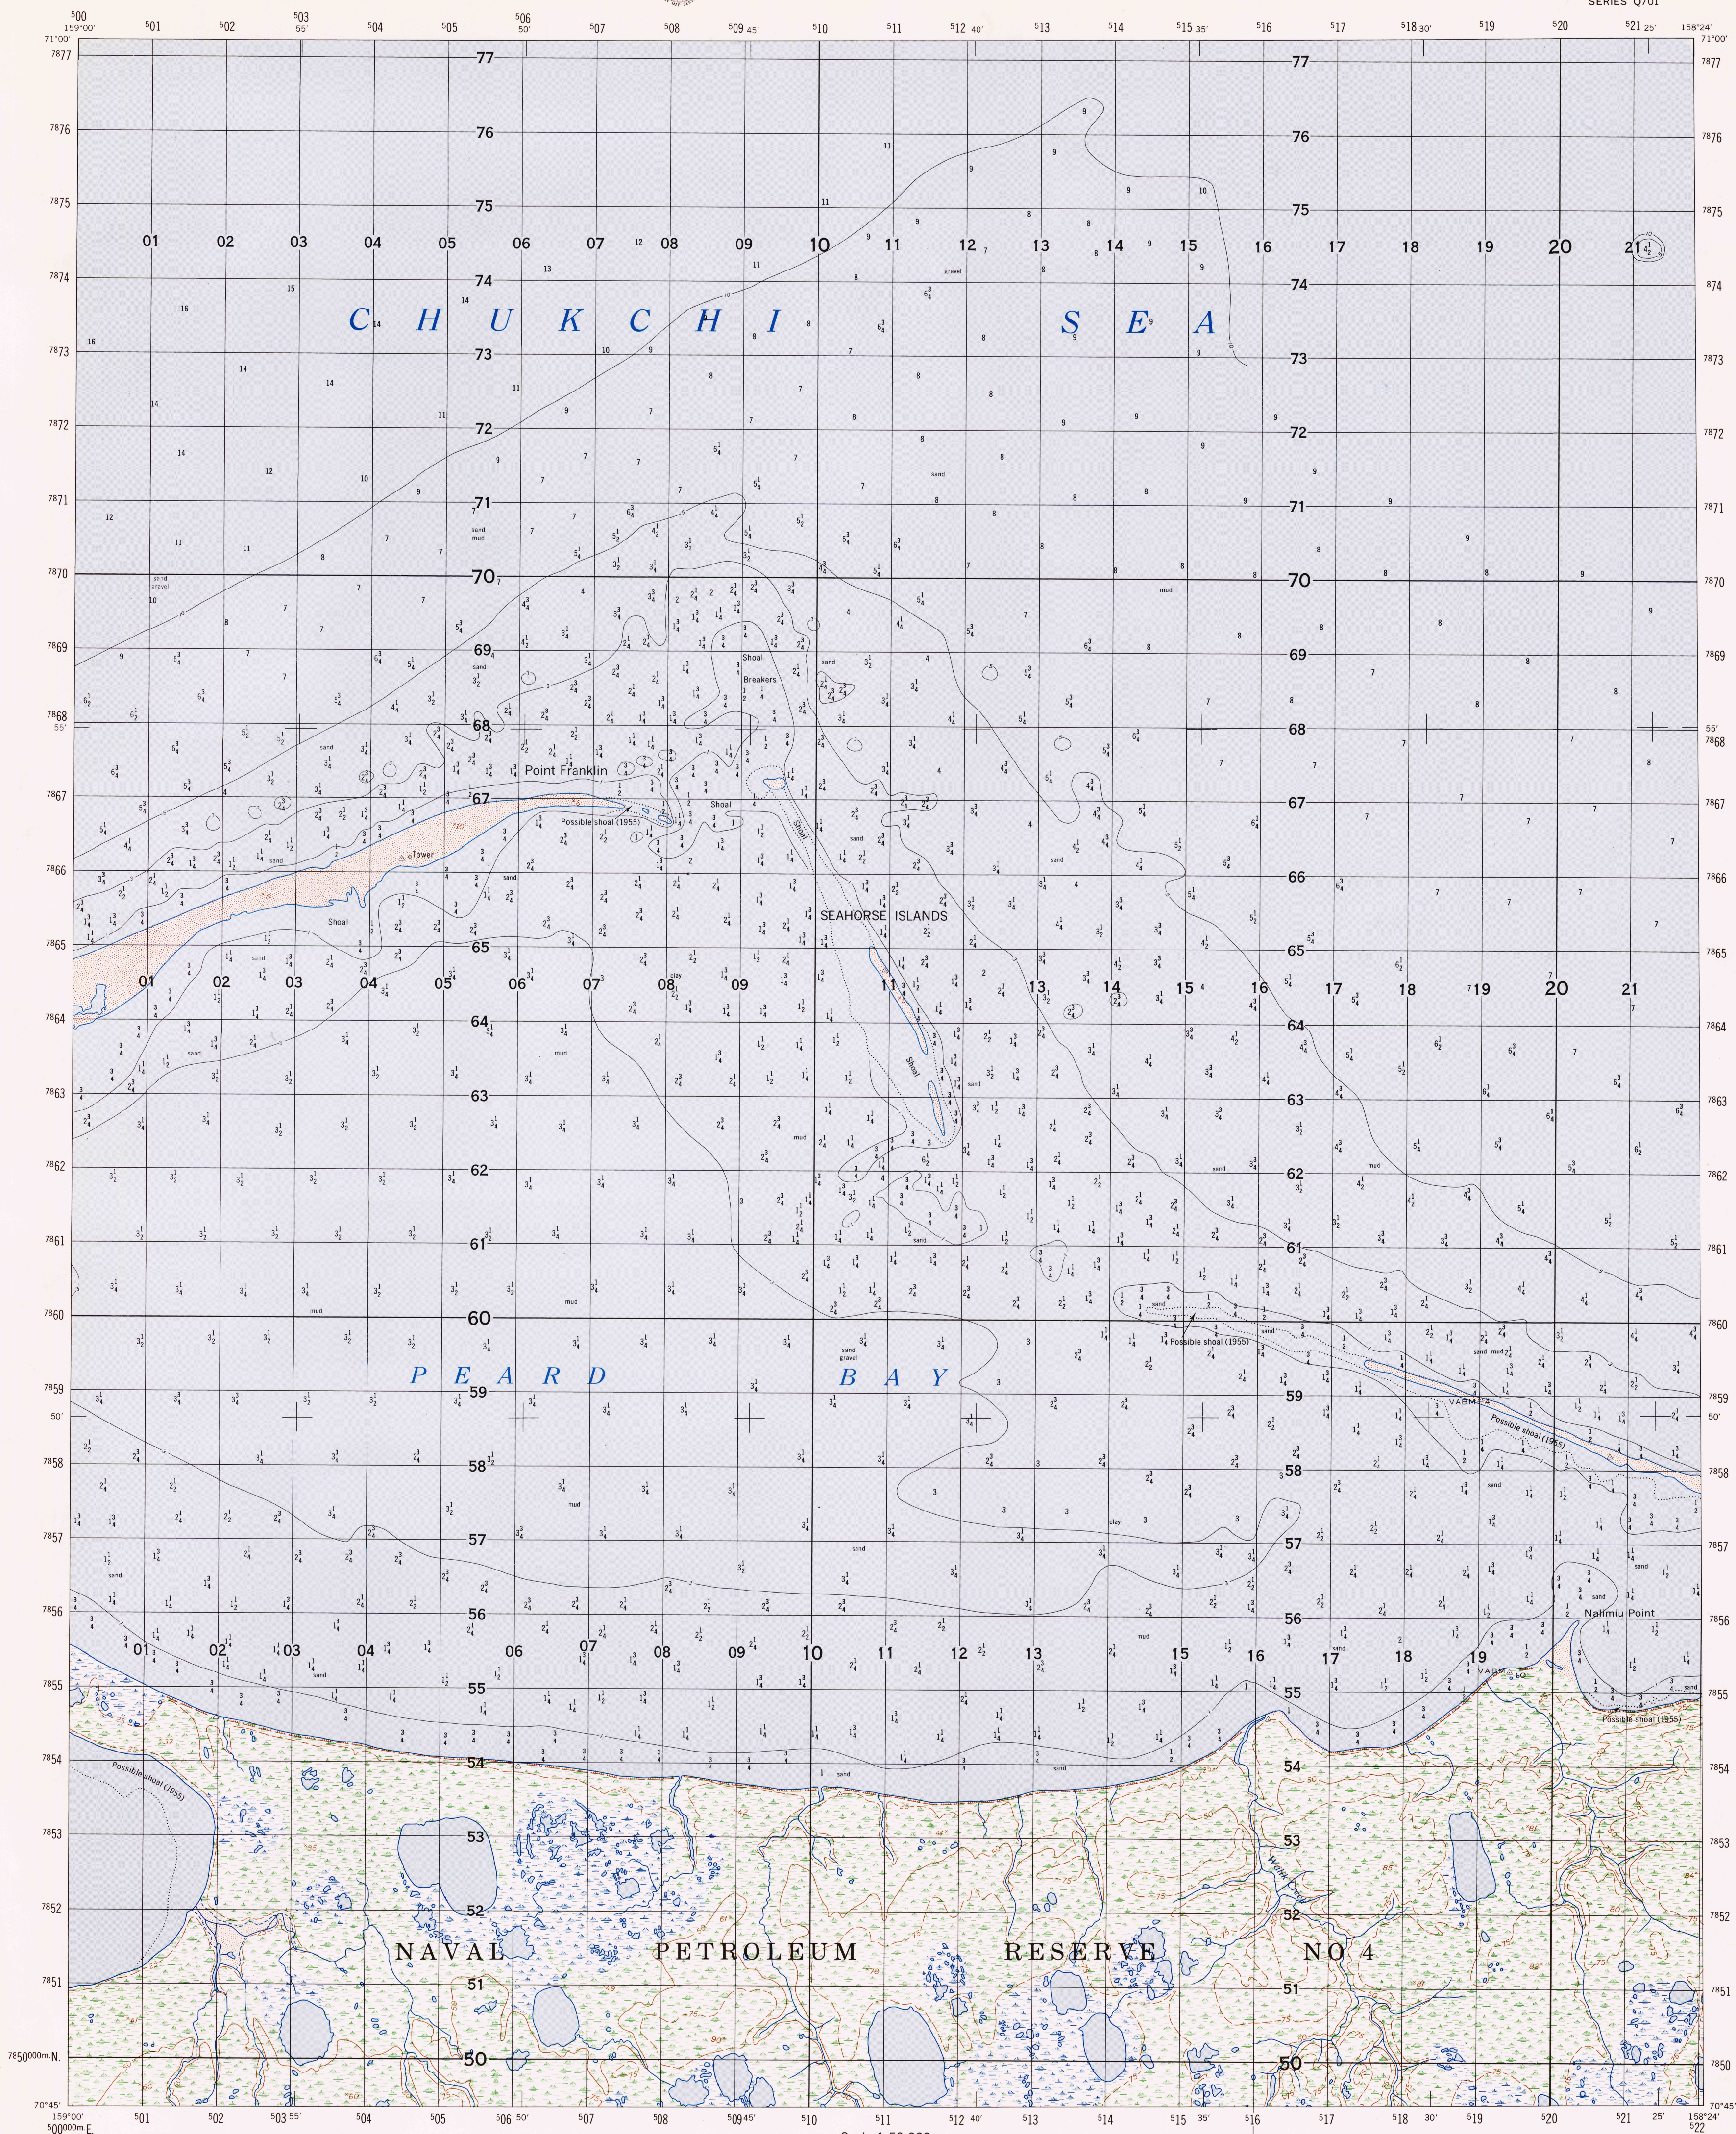
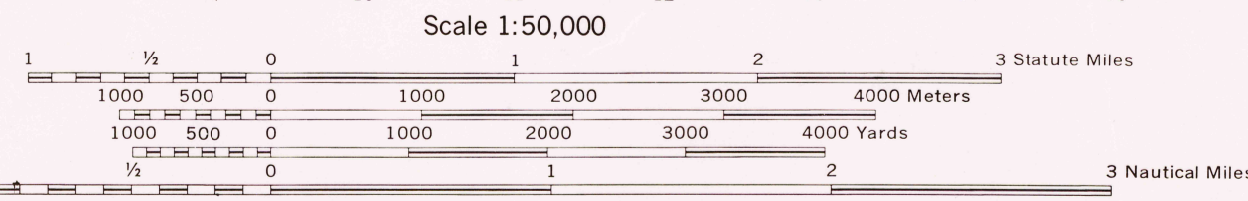
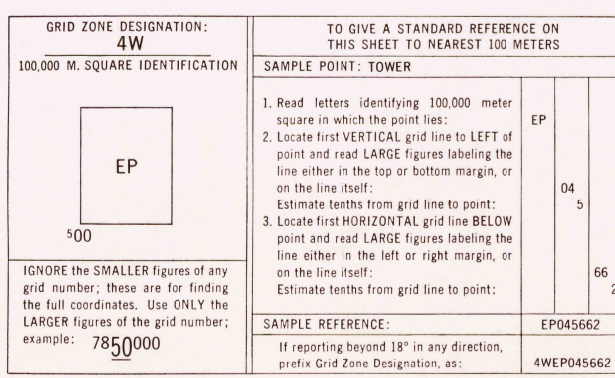


Q701
Edition 1-AMS (First Printing, 1:62)

Prepared by the Army Map Service (ASAM), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1959 by photogrammetric methods. Coastal hydrography compiled from USCGS Chart 9462, 1956. Horizontal and vertical control by USCGS and 660th Engr Bn (Base Topo). Photogrammetry partially field annotated 1955.

CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
VERTICAL DATUM: APPROXIMATE MEAN SEA LEVELTRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUMHYDROGRAPHIC DATUM: SOUNDINGS IN FATHOMS REFERRED TO MEAN LOWER LOW WATER
BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 4
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

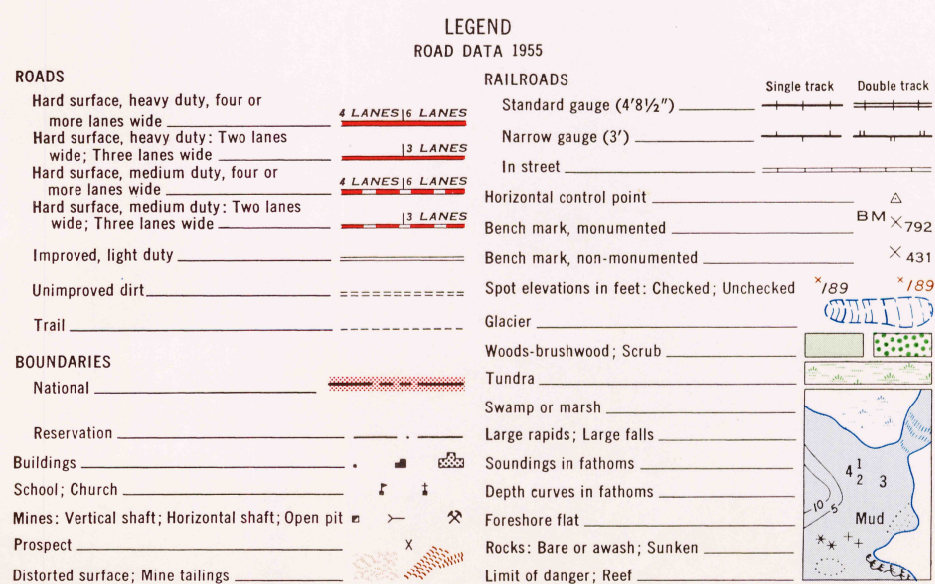

1:62 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

COVERAGE DIAGRAM INDEX TO ADJOINING SHEETS

A USCGS Chart 9462, 1956 (reliability good to poor). Aerial photography Aug. 1955.

COMPLETION METHODS

Photo-stereo

Map

Aerial photography Aug. 1955.

TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH

ADD G-M ANGLE

TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH

SUBTRACT G-M ANGLE

1960 ANNUAL MAGNETIC CHANGE IS NEGLIGIBLE

MEADE RIVER D-5, ALASKA