
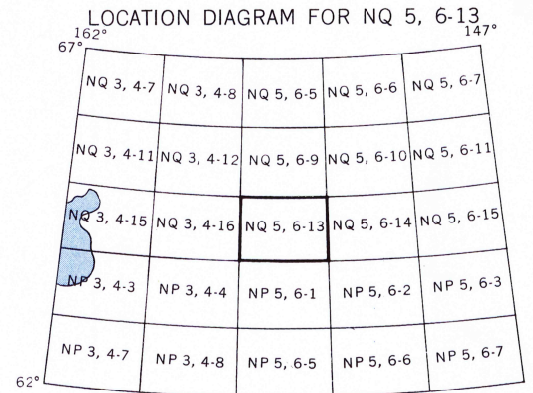


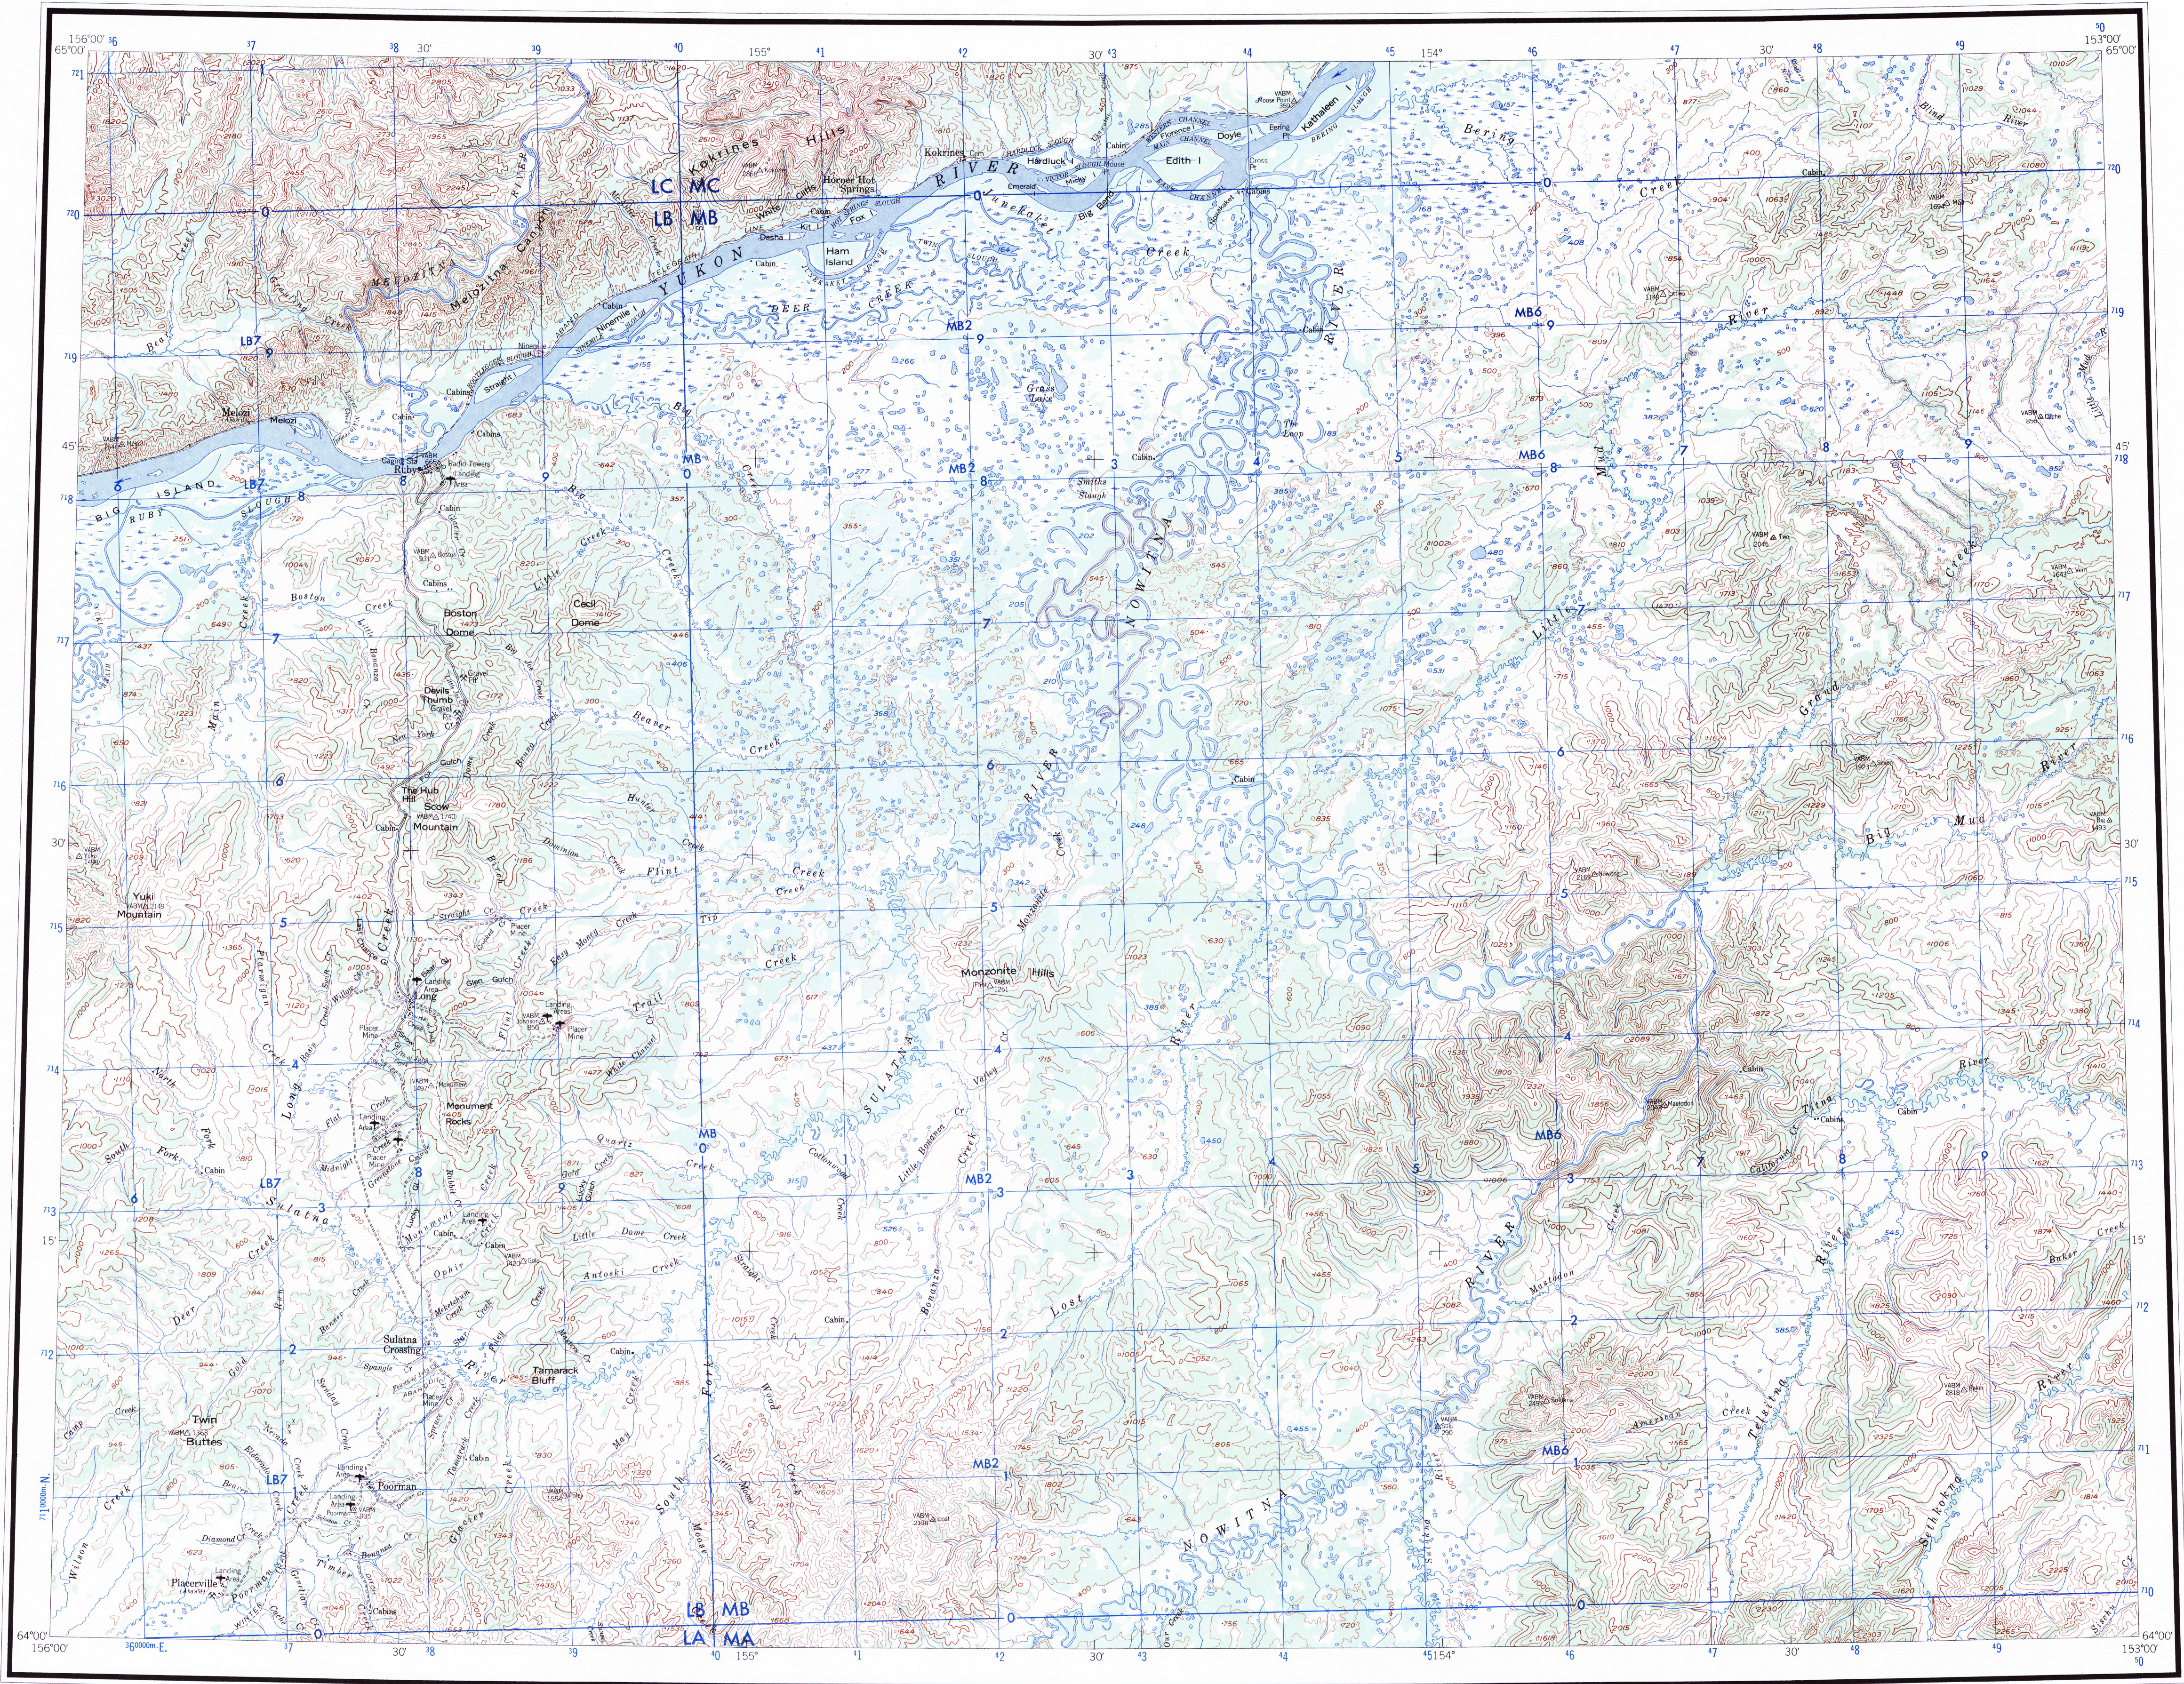

LEGEND

POPULATED PLACES

ANCHORAGE

Over 12,000

5,000 to 12,000

1,000 to 5,000

500 to 1,000

125 to 500

Less than 125

ROADS

Hard surface, heavy duty road

More than two lanes wide

Two lanes wide

Hard surface, medium duty road

More than two lanes wide

Two lanes wide

Improved light duty road

Unimproved dirt road

RAILROADS

Normal gauge

Narrow gauge

BOUNDARIES

International

Part of reservation

Horizontal control point

Spot elevation in feet: Checked: Unchecked

Power line

Mine: Mine prospect; Mine shaft; Mine tunnel

Landmarks: School; Church; Other

Landing area

Seaplane airport

Seaplane anchorage

Glacier

Glacial moraine

Woods-brushwood

Scrub

Land subject to inundation

Mine tailings

Depth curve in feet

Limit of danger: Reef

Wrecks: Sunk; Exposed


Rocks: Sunk; Aweigh

Foreshore flat

Intermittent or dry stream

Marsh or swamp

Q501
Edition 2-AMS
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Ruby, 1952. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, 1952. Control by USGS, USCGS, and USCE. Map not field checked.

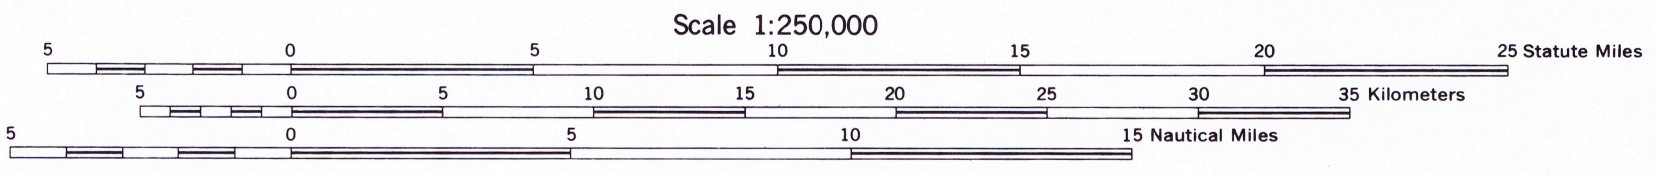

Scale 1:250,000

CONTOUR INTERVAL 200 FEET
DOTTED LINES REPRESENT 100-FOOT CONTOURS
VERTICAL DATUM: MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 5

GRID ZONE DESIGNATION: 5W

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first HORIZONTAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point.

4. Locate first VERTICAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

5. Estimate tenths from grid line to point.

6. Reporting second 1/10 of any direction, prefix Grid Zone Designation, 5W.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 23°11' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 25°19' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°09' WESTERLY.

REFER CORRECTIONS TO THIS MAP TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C.

LIBRARY
JAN 1 1965
U.S. ARMY MAP SERVICE

STOCK NO. Q501NQ5613

RUBY ALASKA