SIMEONOF ISLAND

EDITION 2-AMS

NN 4-5
SERIES Q501

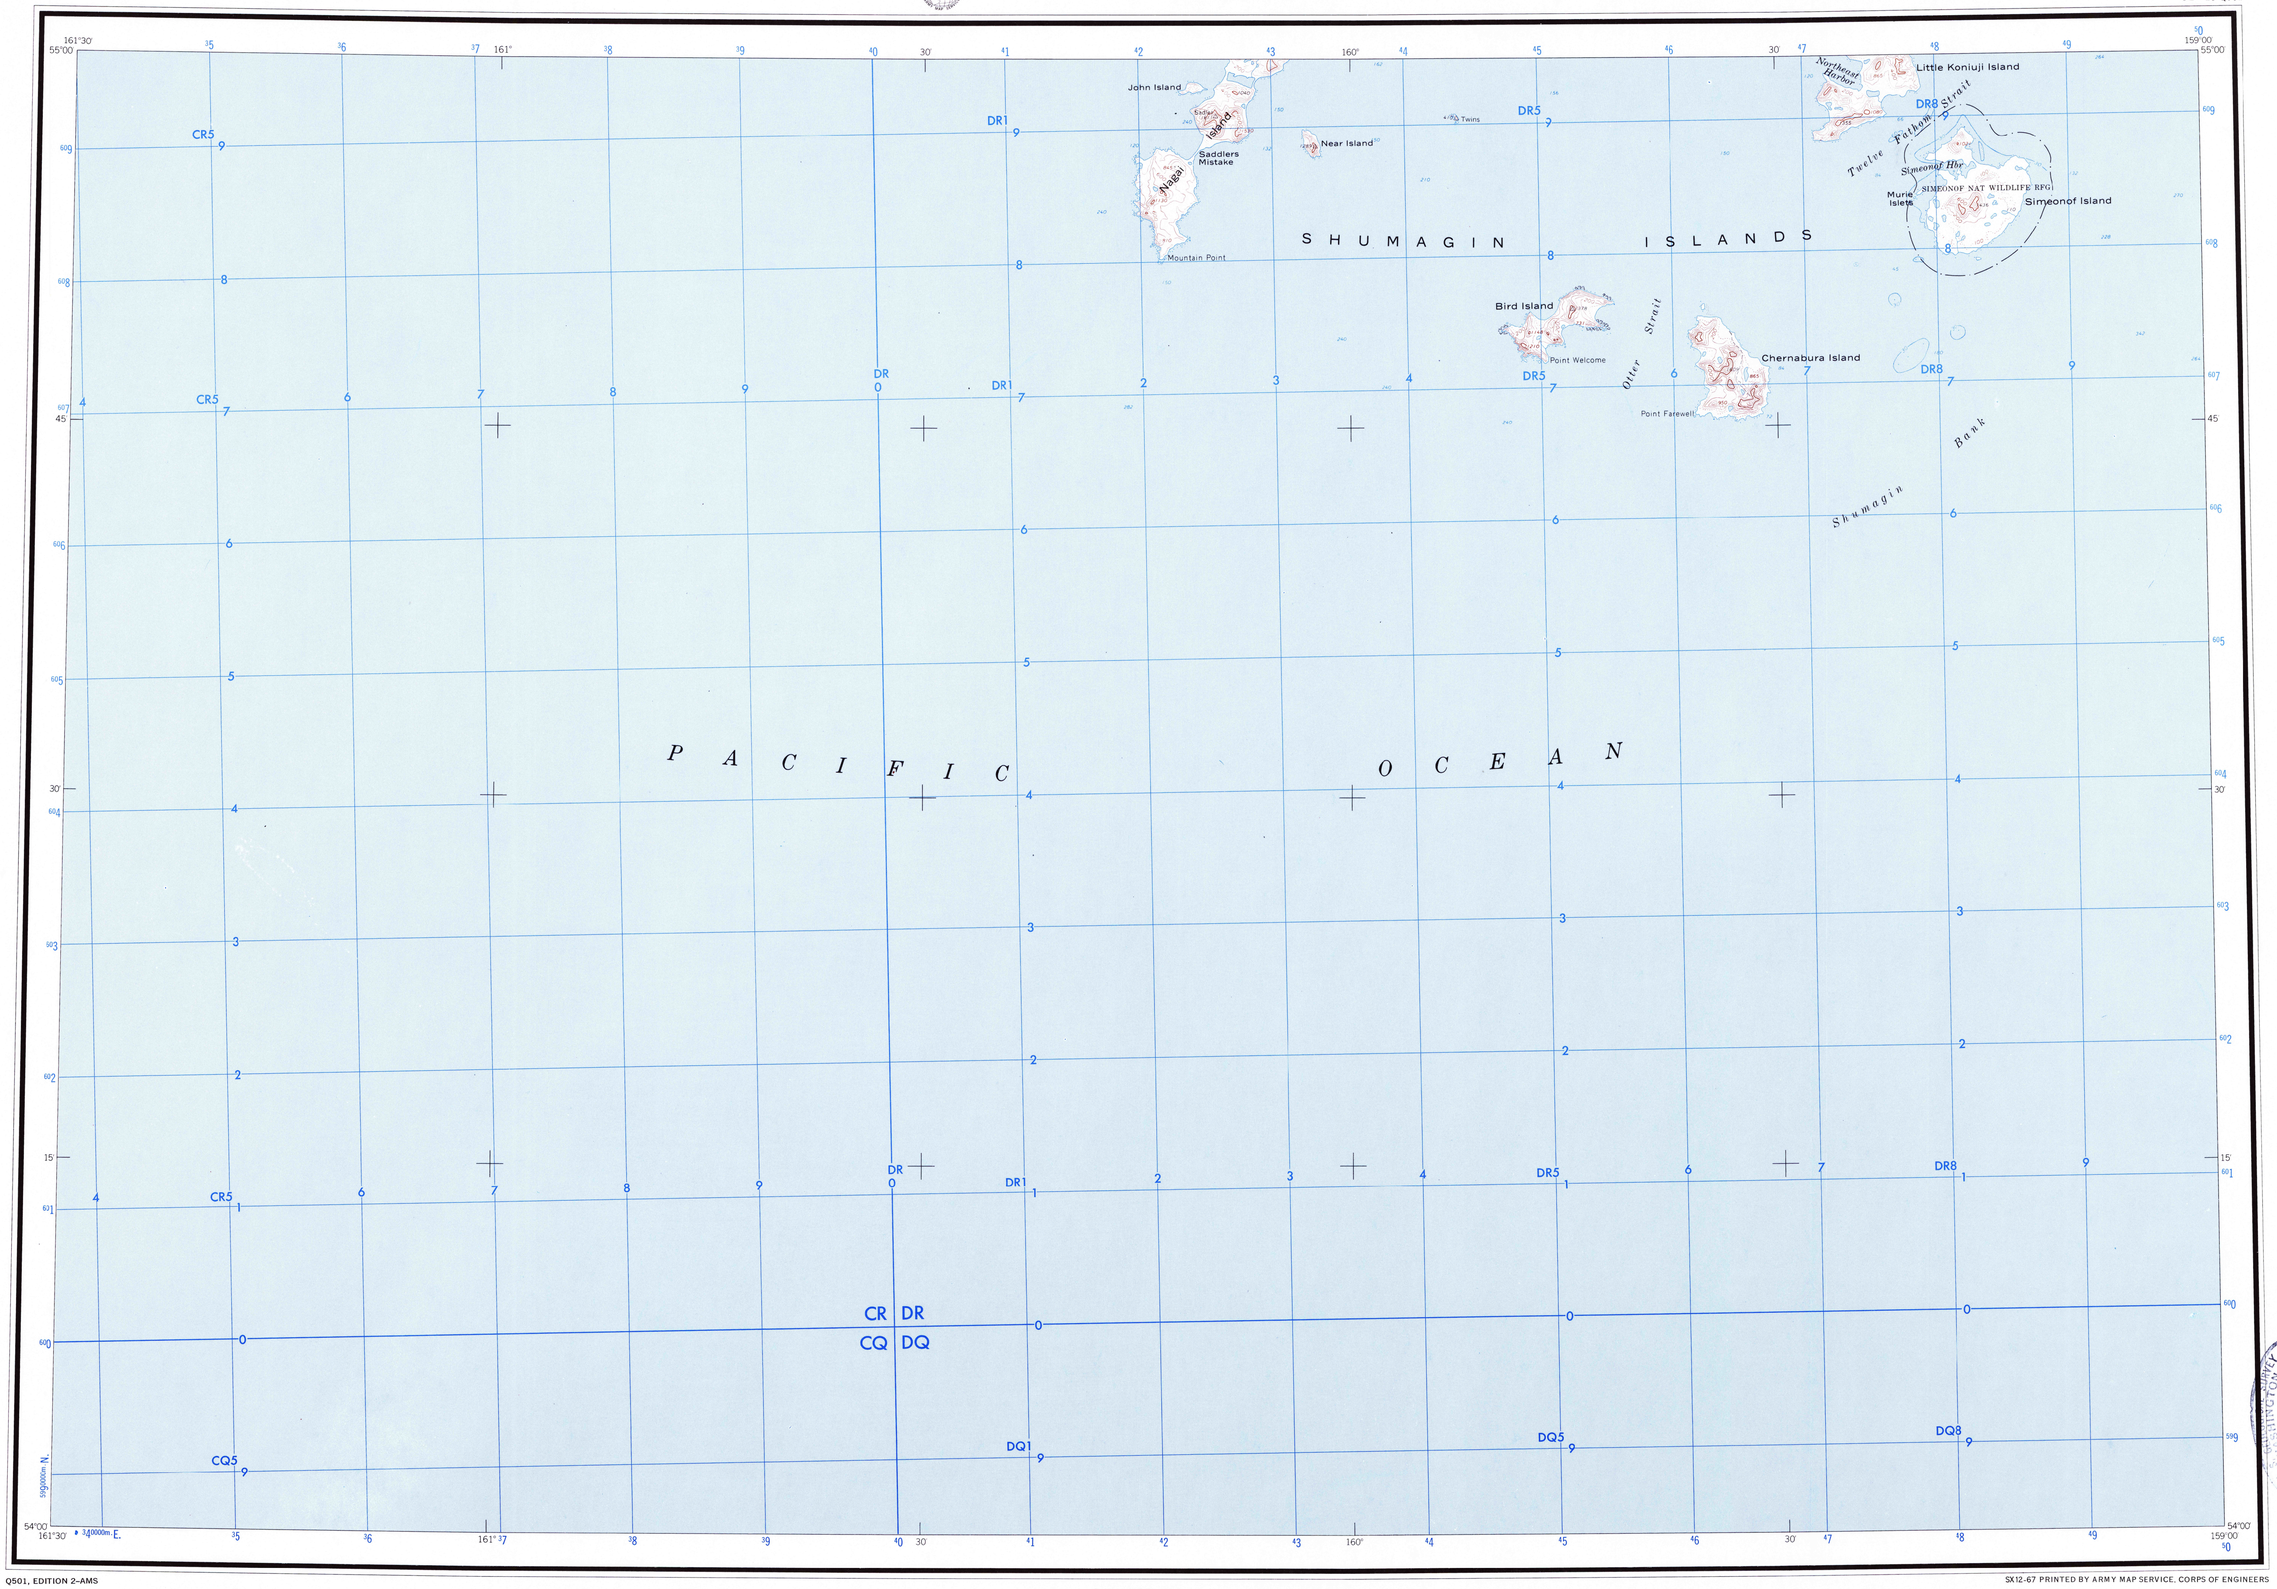

Q501, EDITION 2-AMS

Prepared by the Army Map Service (GE) Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1967 from Alaska 1:250,000, USGS, Simeonof Island 1963. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, surveyed in 1963. Coastal hydrography compiled from USC&GS Charts 8851 (1967) and 8859 (1964). Control by USGS and USC&GS. Map not field checked. **Vegetation information is not available for this sheet.**

LEGEND

POPULATED PLACES
- Over 12,000 — ANCHORAGE
- 5,000 to 12,000 — JUNEAU
- 1,000 to 5,000 — SEWARD
- 500 to 1,000 — Skagway
- 125 to 500 — Sterling
- Less than 125 — Haines

RAILROADS — Single track; Double or Multiple
- Normal gauge
- Narrow gauge

BOUNDARIES
- International
- Park or reservation
- Horizontal control point
- Spot elevation in feet: Checked
- Spot elevation in feet: Unchecked
- Route marker: Federal; State

Woods-brushwood

Scrub

ROADS
- Hard surface, heavy duty road
  - More than two lanes wide
  - Two lanes wide
- Hard surface, medium duty road
  - More than two lanes wide
  - Two lanes wide
- Improved light duty road
- Unimproved dirt road; Trail

Mine; Mine prospect; Mine shaft; Mine tunnel

Landmarks: School; Church; Other

Land subject to inundation

Mine tailings

Power line

Landing area

Seaplane airport

Seaplane anchorage

Glacier

Glacial moraine

Depth curve in feet

Limit of danger; Reef

Wrecks: Sunken; Exposed

Rocks: Sunken; Awash

Foreshore flat

Intermittent or dry stream

Marsh or swamp

Scale 1:250,000

5 0 5 10 15 20 25 Statute Miles

5 0 5 10 15 20 25 30 35 Kilometers

5 0 5 10 15 Nautical Miles

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS
VERTICAL DATUM: MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

HYDROGRAPHIC DATUM: DEPTH CURVES IN FEET REFERRED TO MEAN LOWER LOW WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 4

1965 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 17½° (310 MILS) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 19½° (330 MILS) EASTERLY FOR THE CENTER OF THE EAST EDGE.

REFER CORRECTIONS TO THIS MAP TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C.

United States. Topo. 1:250,000.
Sheet Simeonof Island, 1967.
cop. 1.

LOCATION DIAGRAM



GRID ZONE DESIGNATION: 4U	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS
100,000 M. SQUARE IDENTIFICATION: CR DR / CQ DQ	SAMPLE POINT: SADLER (5.161)
IGNORE the SMALLER figure of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 590000	1. Read letters: identifying 100,000 meter square in which the point lies. 2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: Estimate tenths from grid line to point: 3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: Estimate tenths from grid line to point:
	SAMPLE REFERENCE: DR(69)
	If reporting beyond 9°N.S. or 18°E W. prefix Grid Zone Designation, as: 4UDR(69)

SX12-67 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

SIMEONOF ISLAND, ALASKA
STOCK NO. Q501XNN45

U.S. DEPT. OF COMMERCE
WASHINGTON, D.C.
MAY 14 1968
LIBRARY
1967
1