


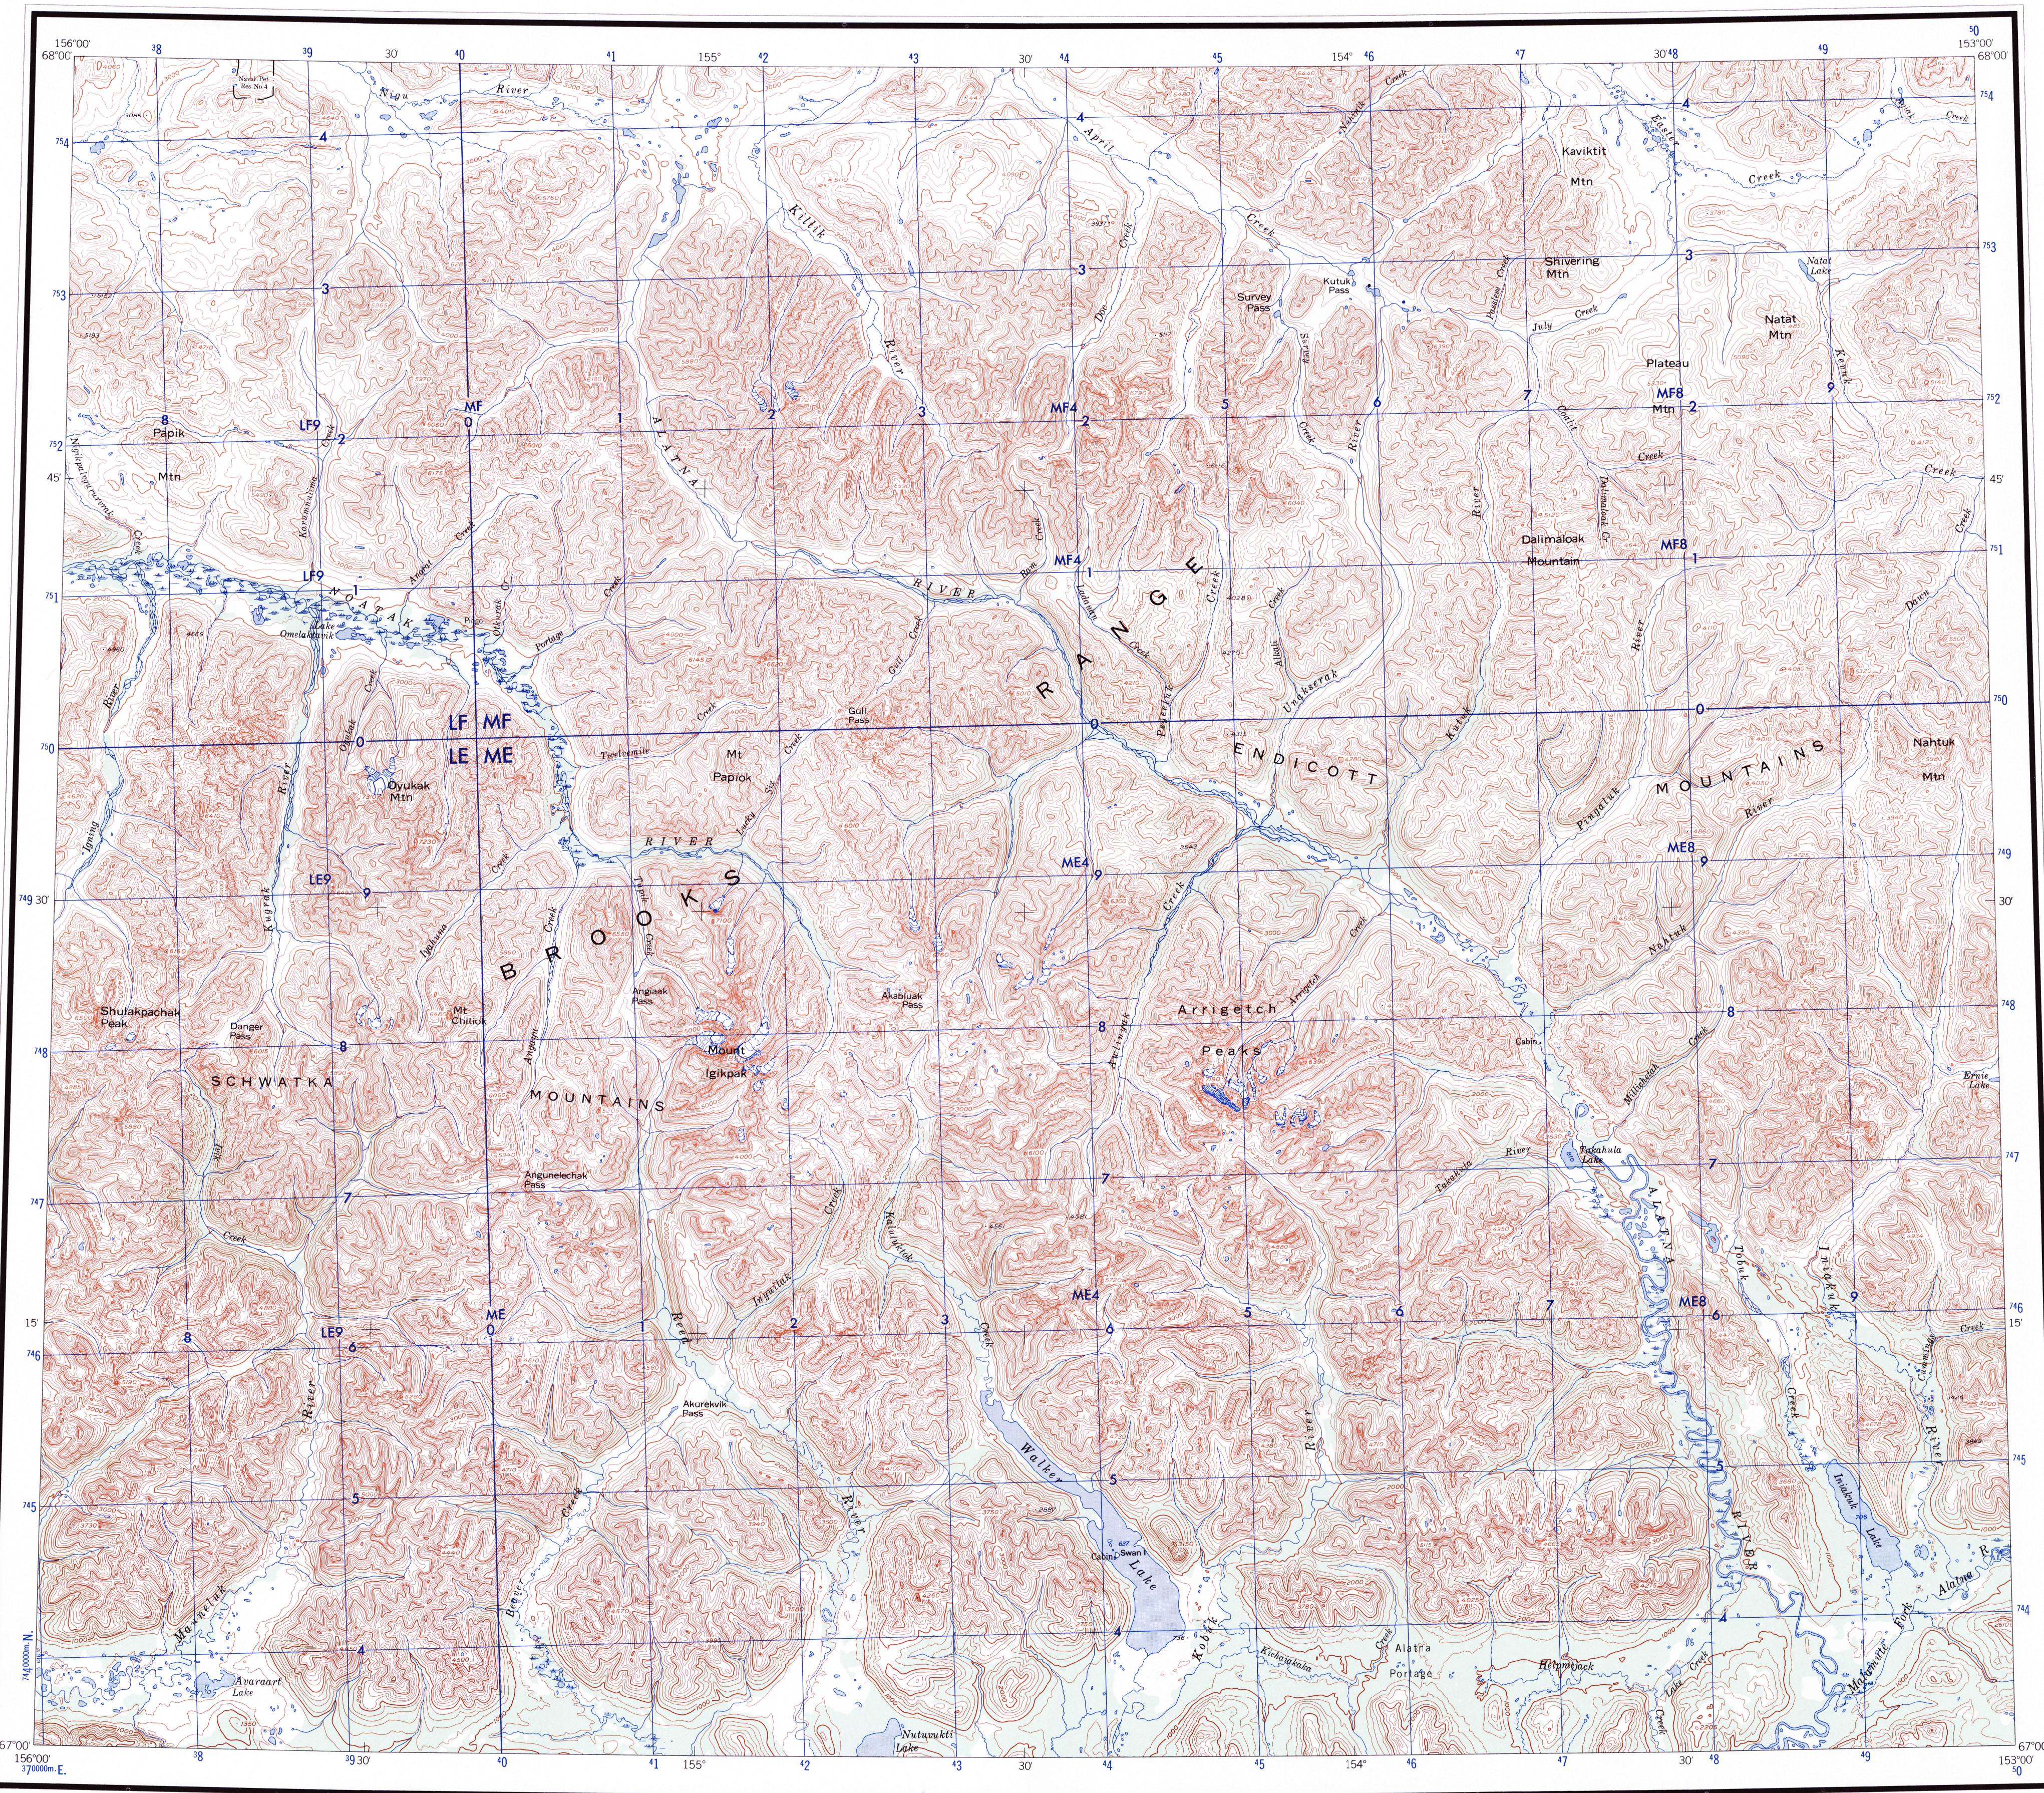

LOCATION DIAGRAM FOR NQ 5, 6-1

NR 3, 4-11	NR 3, 4-12	NR 5, 6-9	NR 5, 6-10	NR 5, 6-11
NR 3, 4-15	NR 3, 4-16	NR 5, 6-13	NR 5, 6-14	NR 5, 6-15
NQ 3, 4-3	NQ 3, 4-4	NQ 5, 6-1	NQ 5, 6-2	NQ 5, 6-3
NQ 3, 4-7	NQ 3, 4-8	NQ 5, 6-5	NQ 5, 6-6	NQ 5, 6-7
NQ 3, 4-11	NQ 3, 4-12	NQ 5, 6-9	NQ 5, 6-10	NQ 5, 6-11

LEGEND

POPULATED PLACES	
Over 12,000	ANCHORAGE
5,000 to 12,000	JUNEAU
1,000 to 5,000	SEWARD
500 to 1,000	Skagway
125 to 500	Sterling
Less than 125	Haines
ROADS	
Hard surface, heavy duty road	
More than two lanes wide	
Two lanes wide	
Hard surface, medium duty road	
More than two lanes wide	
Two lanes wide	
Improved light duty road	
Unimproved dirt road; Trail	
RAILROADS	
Normal gauge	
Narrow gauge	
BOUNDARIES	
International	
Park or reservation	
Horizontal control point	
Spot elevation in feet: Checked, Unchecked	
Power line	
Mine, Mine prospect; Mine shaft; Mine tunnel	
Landmarks: School; Church; Other	
Landplane airport	
Landing area	
Seaplane airport	
Seaplane anchorage	
Glacier	
Glacial moraine	
Woods-brushwood	
Scrub	
Land subject to inundation	
Mine tailings	
Depth curve in feet	
Limit of danger: Reef	
Wrecks: Sunk; Exposed	
Rocks: Sunk; Awa's	
Forshore flat	
Intermittent or dry stream	
Marsh or swamp	


Q501

Edition 2-AMS

Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Survey Pass, 1956. Original map compiled by USGS, 1956. Topography compiled by photogrammetric methods. Aerial photography 1955. Control by USGS. Map not field checked.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 24°15' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 20°39' EASTERLY FOR THE CENTER OF THE EAST EDGE. MFAN ANNUAL CHANGE IS 0.004 WESTERLY.

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

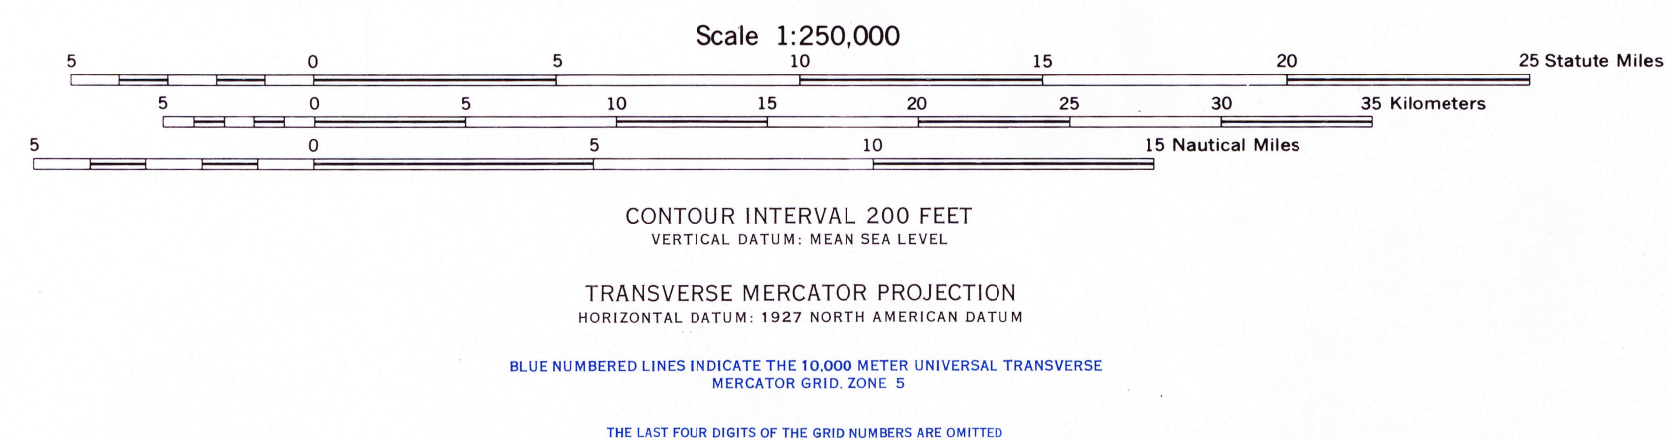

SX 10-64 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION		TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS	
100,000 M. SQUARE IDENTIFICATION		SAMPLE POINT: CABIN	
LF	MF	75	ME
LE	ME	40	50
IGNORE THE SMALLER FIGURES OF ANY GRID NUMBER. WHEN YOU ARE FINDING THE FULL COORDINATES, USE ONLY THE LAST TWO DIGITS OF THE GRID NUMBER; example: 744,000		SAMPLE REFERENCE: 744,000	
		IF REMAINING FIGURES 10° IN ANY DIRECTION, prefix Grid Zone Designation, ex:	
		SW ME 45	

SURVEY PASS, ALASKA

STOCK NO. 0501XNQ561