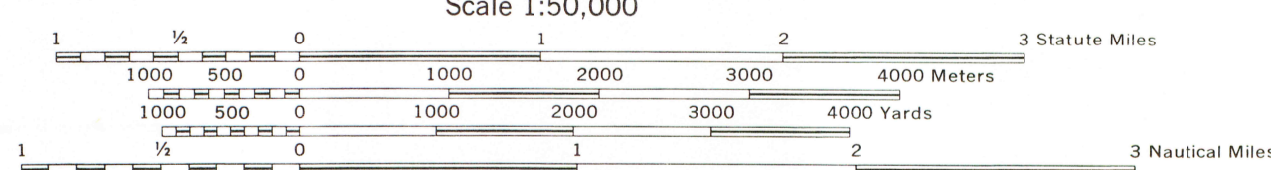


Q701
Edition 1-AMS (First Printing, 2-62)

Prepared by the Army Map Service (VLBAM), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1959 by photogrammetric methods. Aerial photography August 1955. Horizontal and vertical control by USCGS and 660th Engr Bn (Base Topo). Photography partially field annotated 1955.

LEGEND	
ROAD DATA 1955	
ROADS	RAILROADS
Hard surface, heavy duty, four or more lanes wide	Standard gauge (4'8 1/2")
Hard surface, heavy duty, two lanes wide	Narrow gauge (3')
Hard surface, medium duty, four or more lanes wide	In street
Hard surface, medium duty, two lanes wide	Horizontal control point
Improved, light duty	Bench mark, non-monumented
Unimproved dirt	Spot elevations in feet: Checked, Unchecked
Trail	Glacier
BOUNDARIES	Woods-brushwood; Scrub
National	Tundra
Reservation	Swamp or marsh
Buildings	Large rapids; Large falls
School; Church	Soundings in fathoms
Mines: Vertical shaft; Horizontal shaft; Open pit	Depth curves in fathoms
Prospect	Foreshore flat
Distorted surface; Mine tailings	Rocks: Bare or awash; Sunken
	Limit of danger; Reef


MAXIMUM ELEVATION LESS THAN 50 FEET
SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
VERTICAL DATUM: APPROXIMATE MEAN SEA LEVELTRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUMBLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 5
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

GRID ZONE DESIGNATION	
100,000 M. SQUARE IDENTIFICATION	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
MJ	SAMPLE POINT: VABM 6-24
1. Read letters identifying 100,000 meter square in which the point lies:	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figures labeling the line either in the top or bottom margin, or on the line itself.
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figures labeling the line either in the left or right margin, or on the line itself.	4. Estimate tenths from grid line to point:
56	5
5. If reporting beyond 10' in any direction, prefix Grid Zone Designation, as:	6. If reporting beyond 10' in any direction, prefix Grid Zone Designation, as:
56	56

TO CONVERT A
MAGNETIC AZIMUTH
TO A GRID AZIMUTH
ADD G-M ANGLETO CONVERT A
GRID AZIMUTH TO A
MAGNETIC AZIMUTH
SUBTRACT G-M ANGLE

1° = 60' (17.77 M.I.LS.)

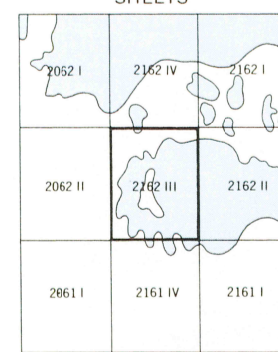1960 ANNUAL MAGNETIC
CHANGE IS NEGLIGIBLEINDEX TO ADJOINING
SHEETSSheet 2162 III falls within NPS 5, 6, 5, 0501.
1:250,000FILE COPY
OCT 4 1962
MAP INFORMATION OFFICE

TESHEKPUK C-2, ALASKA