


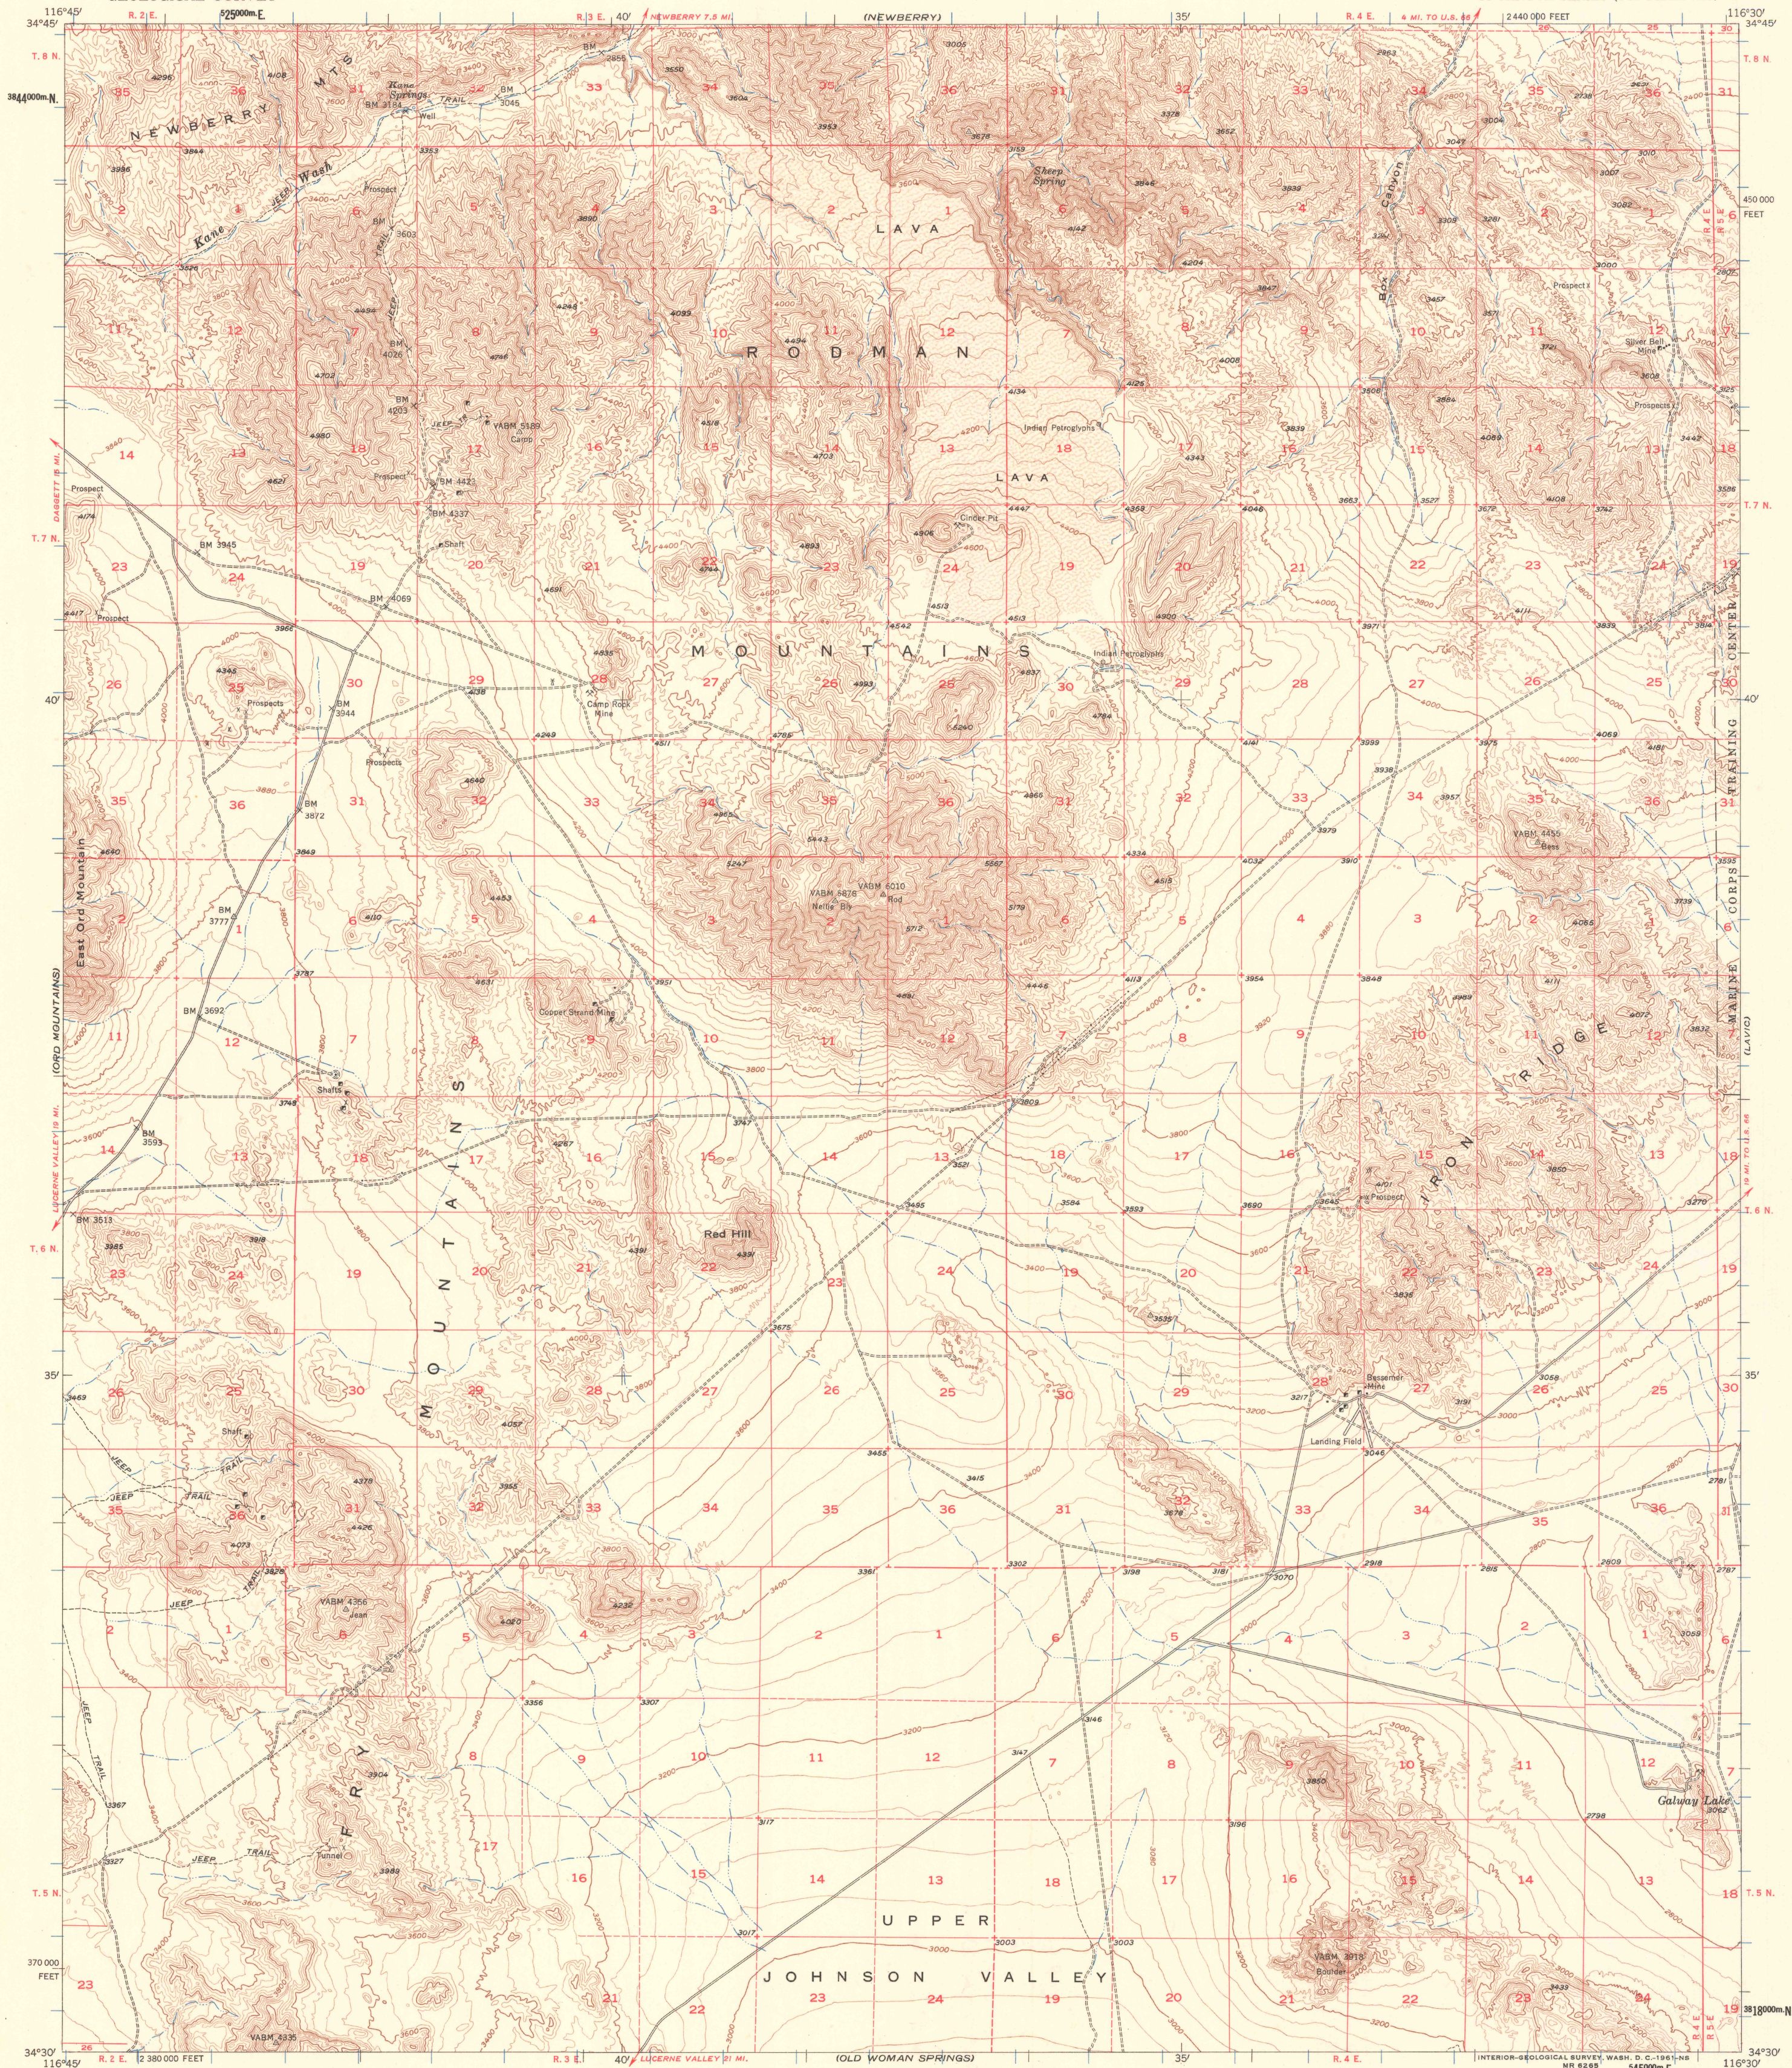


Mapped, edited, and published by the Geological Survey
Control by USGS and USC&GS

Topography from aerial photographs by Kelsh plotter
Aerial photographs taken 1951 and 1952. Field check 1955

Polyconic projection. 1927 North American datum
10,000-foot grid based on California coordinate system, zone 5
1000-meter Universal Transverse Mercator grid ticks,
zone 11, shown in blue

Dashed land lines indicate approximate locations



SCALE 1:62500

The graphic scale bar consists of three horizontal lines. The top line is labeled 'MILES' at the right end and has major tick marks at 1, 2, 3, and 4. The middle line is labeled 'FEET' at the right end and has major tick marks at 3000, 6000, 9000, 12000, 15000, 18000, and 21000. The bottom line is labeled 'KILOMETERS' at the right end and has major tick marks at 1, 2, 3, 4, and 5. Below the scale bar, the text 'CONTOUR INTERVAL 40 FEET' and 'DATUM IS MEAN SEA LEVEL' is printed.

CONTOUR INTERVAL 40 FEET
DATUM IS MEAN SEA LEVEL

ROAD CLASSIFICATION

Light-duty _____ Unimproved dirt =

The northeast quarter of this area is also covered by 1:24 000 scale map of the Silver Bell Mine 7.5 minute quadrangle surveyed in 1955

RODMAN MOUNTAINS, CALIF
N 3430—W 11630/15

1955

FILE COPY
CALIF
JUN 1 1961
QUADRANGLE LOCATION
MAP INFORMATION OFFICE

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER 25, COLORADO OR WASHINGTON 25, D.C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST