


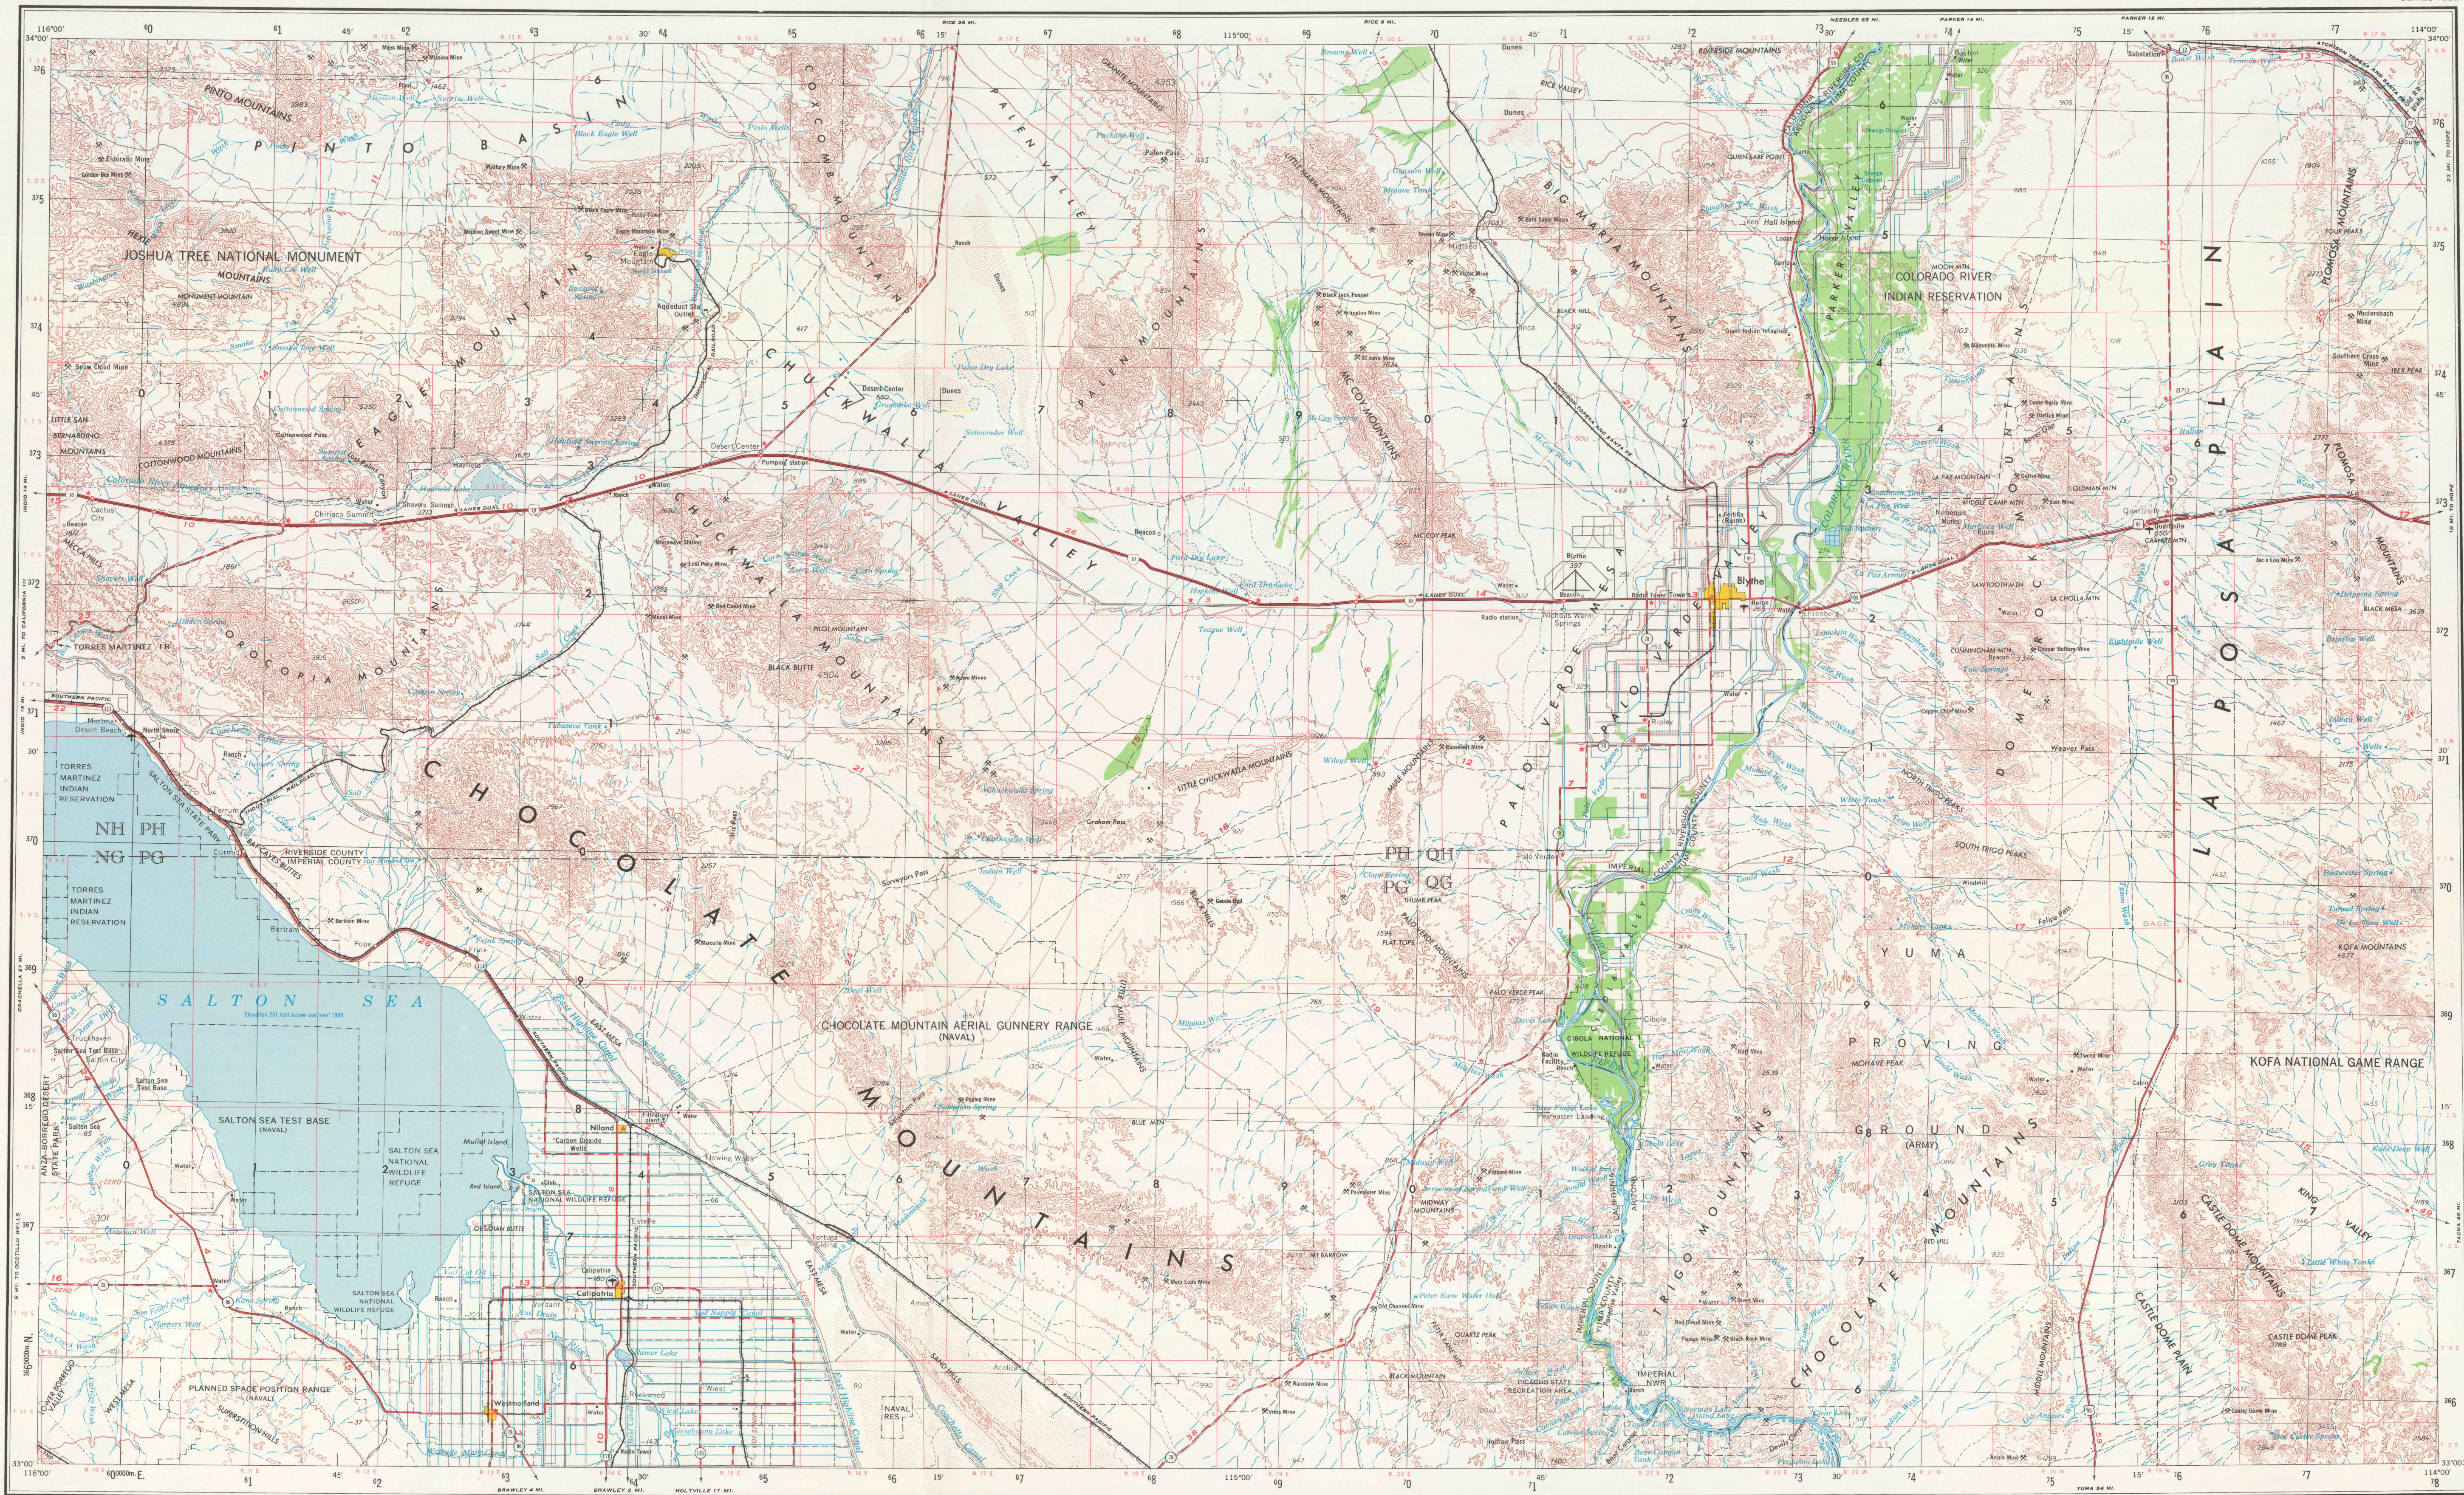

V502, EDITION 4
Prepared by the U.S. Army Topographic Command (KCLD), Washington, D.C. Compiled in 1959 by photogrammetric methods and from United States quadrangles 1:24,000, 1:25,000, 1:46,000, 1:50,000, and 1:62,500, 1927-57. Planimetry revised in part from aerial photographs taken 1944-54. Map field checked 1959. Revised by the U.S. Geological Survey 1969.
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram

LEGEND
Figures in red denote approximate distances in miles between stars

POPULATED PLACES
Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

ROADS
Primary, all-weather, hard surface
Secondary, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Interchange
Sun Valley Route markers: Interstate, U.S., State

RAILROADS
Normal gauge
Narrow gauge
Landplane airport
Landing area
Orchard
Woods/brushwood

BOUNDARIES
International
State
County
Park or reservation

Other features:
Mine
Landmark: School, Church, Other, etc.
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Dry lake


Scale 1:250,000
0 5 10 15 20 25 30 Statute Miles
0 5 10 15 20 25 30 Kilometers
0 5 10 15 20 25 30 Nautical Miles

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 11

MAGNETIC VARIATION FOR 1985 IS 14°51' (200 MILS) EASTERLY OVER THE ENTIRE AREA

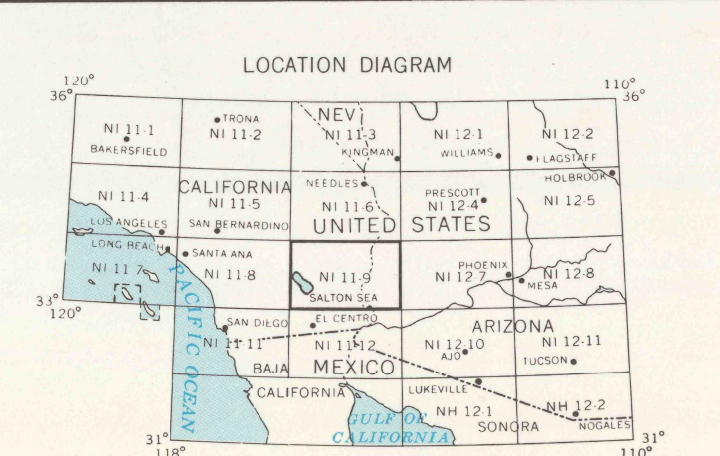

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION
11S
100,000 M. SQUARE IDENTIFICATION
SAMPLE POINT: BLYTHE

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which point lies.
2. Locate first vertical grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or in the left margin.
3. Estimate tenths from grid line to point.
4. Locate first horizontal grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the top margin.
5. Estimate tenths from grid line to point.
6. If reporting beyond 10' in any direction, prefix with "NEARLY".

GRID COORDINATES
Easting: 1180000
Northing: 3300000

GRID ZONE DESIGNATION
11S
100,000 M. SQUARE IDENTIFICATION
SAMPLE POINT: BLYTHE

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which point lies.
2. Locate first vertical grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or in the left margin.
3. Estimate tenths from grid line to point.
4. Locate first horizontal grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the top margin.
5. Estimate tenths from grid line to point.
6. If reporting beyond 10' in any direction, prefix with "NEARLY".

GRID COORDINATES
Easting: 1180000
Northing: 3300000

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20242

SALTON SEA, CALIF.; ARIZ.
1959
REVISED 1969

STOCK NO. V502XN119***04

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION