
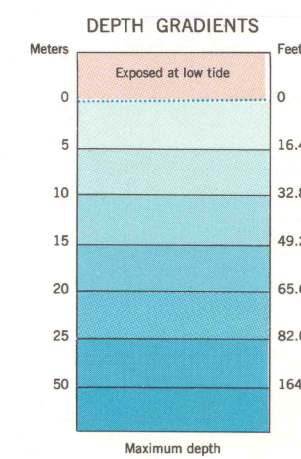


NATIONAL OCEAN SERVICE
HYDROGRAPHIC SURVEY INDEXHYDROGRAPHIC SURVEY
INFORMATION

SURVEY NUMBER	SURVEY DATE	SURVEY SCALE	SURVEY LINE SPACING (NAUT. MILES)
H-4811	1928	1:20,000	02-15
H-4930	1928-29	1:20,000	02-18
H-5614	1934	1:5,000	01-10
H-8716	1963	1:100,000	20-10
H-8782	1964	1:100,000	40-90

SCALE 1:24 000



CONTOUR INTERVAL 5 FEET

NATIONAL GEODETIC VERTICAL DATUM OF 1929
BATHYMETRIC CONTOUR INTERVAL 1 METER AND 50 METERS
WITH SUPPLEMENTARY 0.5 METER AND 10 METER INTERVALS
DATUM IS MEAN LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852
FOR DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS, IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

Heavy-duty Light-duty
Medium-duty Unimproved dirt =====
○ State Route

PORT EVERGLADES, FLA

26080-A1-TB-024
1962

PHOTOREVISED 1983
BATHYMETRY ADDED 1986

DMA 4936 II SE-SERIES V84

TM GRID AND 1986 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET