



V501
Edition 1-AMS (First Printing, 3-58)
Prepared by the Army Map Service (BEGN), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1955 by photogrammetric methods and from: Windsor, Ontario, Canada, 1:253,440, G585, Department of National Defense, 1943; USLS Charts 51, 1954; 52, 1955. Horizontal and vertical control by USGS and USCGS. Photography field annotated 1954.

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS
Single track
Double or Multiple track
Standard gauge
Narrow gauge
Interurban
State or province
County
Park or reservation
Horizontal control point
Spot elevation in feet

LEGEND
ROAD DATA 1954
Figures in red denote approximate distances in miles between stars
ROADS
Hard surface, heavy duty
More than two lanes wide
Hard surface, medium duty
More than two lanes wide
Two lanes wide; State route marker
Improved light duty
Unimproved dirt
Trail
Landmarks: School; Church; Other
Depth curve in feet
Limit of danger: Reef
Rocks: Awash; Sunken
Foreshoresh flat
Intermittent or dry stream
Marsh or swamp

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES

LANDS
3 LANES
2 LANES
1 LANE
0 LANES



Scale 1:250,000

CONTOUR INTERVAL 50 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID. ZONE 17
THE LAST FOUR DIGITS OF THE GRID NUMBERS ARE OMITTED

1955 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 2° 45' WESTERLY FOR THE CENTER OF THE WEST
EDGE TO 0° 15' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS NEGLECTABLE.
USING NOTING ERRORS OR OMISSIONS ON THIS MAP MAY BE USED TO MARK MESS AND FORWARD DIRECTLY TO COMMANDING
OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

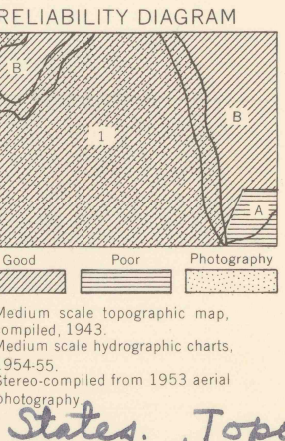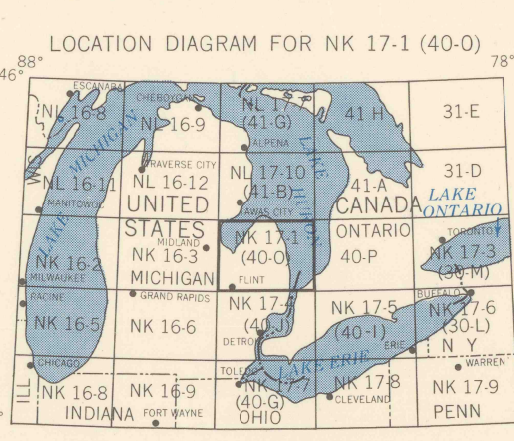

PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS, 3-58, 779555

GRID ZONE DESIGNATION	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
17T	SAMPLE POINT: SILVERWOOD
KU LU MU	1. Read letters identifying 100,000 meter square in which the point lies.
KT LT MT	2. Locate first HORIZONTAL and line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.
	3. Estimate tenths from grid line to point.
	4. Locate first HORIZONTAL and line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.
	5. Estimate tenths from grid line to point.
	SAMPLE REFERENCE:
	If reporting beyond 10° in any direction, prefix Grid Zone Designation, etc.
	17T899
	17T1899

United States Topo. 1:250,000. 1958A
Sheet Flint, cop. 1.

FLINT, U. S. CANADA