


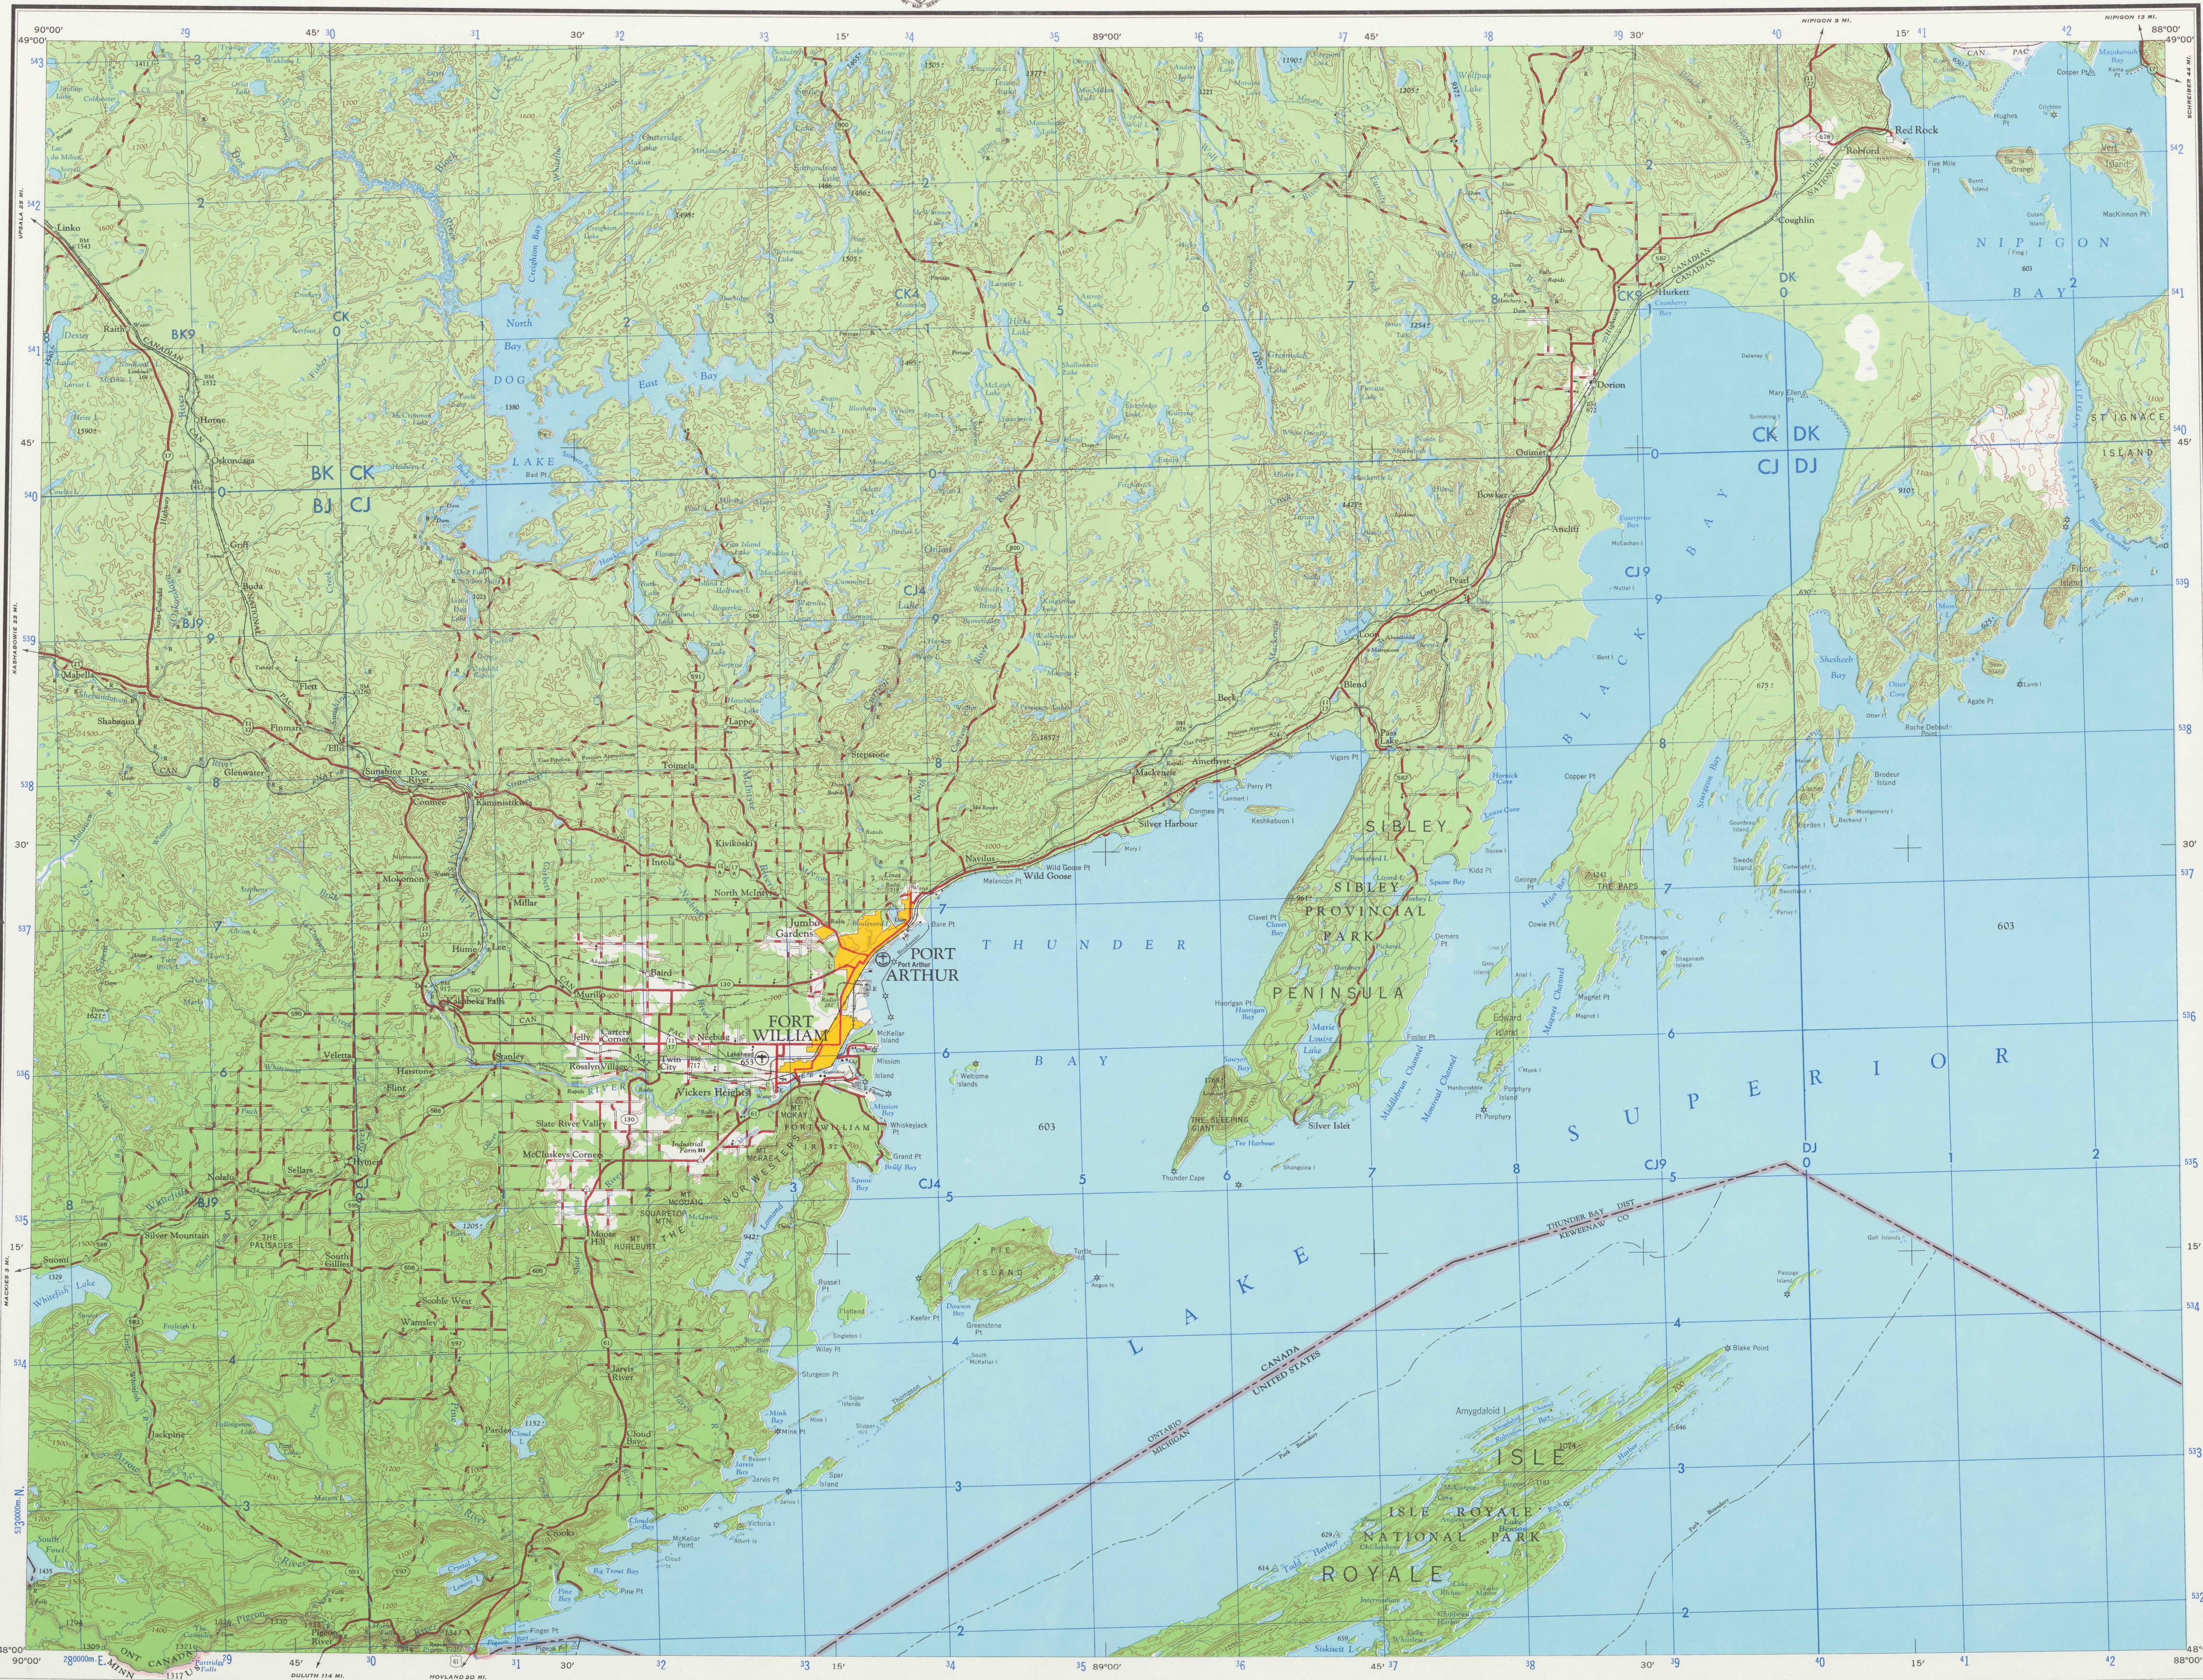

V501, EDITION 1-AMS
Prepared by the Army Map Service Establishment, R.C.E., Canada 1959. United States area from maps of the Army Map Service, Corps of Engineers, U.S. Army. Limited revision of the U.S. area by the U.S. Geological Survey 1966.

LEGEND
ROAD DATA 1959 U.S. AREA PARTIALLY REVISED 1966

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

RAILROADS

- Single track Double or Multiple
- Normal gauge
- Narrow gauge

BOUNDARIES

- International
- State or Province
- County or District
- Park or reservation
- Horizontal control point
- Spot elevation in feet

ROADS

- Hard surface, all weather
- Hard surface, all weather
- Loose surface, all weather
- Loose surface, all weather; dry weather
- Cart track or trail

Other features

- Landplane airport
- Landing area
- Seaplane airport
- Seaplane anchorage
- Power line
- Monument, tower, etc.
- Approximate road alignment
- Route marker: Interstate, Federal, State
- Landmark: School, Church, Other
- Limit of danger; Reef
- Rocks: Awash; Sunken
- Foreshore flat
- Intermittent or dry stream
- Marsh or swamp

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers


0 5 10 15 Nautical Miles

CONTOUR INTERVAL 100 FEET
TRANSVERSE MERCATOR PROJECTION

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16

1965 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 24° 40' MILES EASTERLY FOR THE CENTER OF THE WEST EDGE TO 34° 10' MILES WESTERLY FOR THE CENTER OF THE EAST EDGE

REFER CORRECTIONS TO THIS MAP TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. 20315.

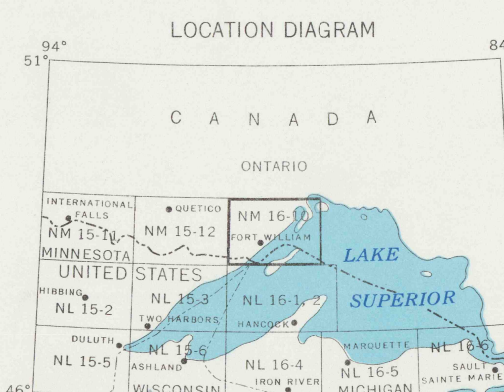

SX 9-68 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION:

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

100,000 M. SQUARE IDENTIFICATION

SAMPLE POINT: NAVIGATOR

BK CK DK 40

CJ

BJ BJ CJ DJ

4

30 40

5

IGNORE THE SMALLER figure of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 530000

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure below the line either in the top or bottom margin, or on the line itself.
3. Estimate tenths from grid line to point.
4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure below the line either in the left or right margin, or on the line itself.
5. Estimate tenths from grid line to point.

7

SAMPLE REFERENCE:

C14873

If reporting beyond 9° N. or 18° W. prefix Grid Zone Designation, etc.

16U04195

United States. Topo. 1:250,000. Sheet Fort William, 1968. Cop. 1.

FORT WILLIAM, ONT., CAN.; MICH., MINN., U.S.-
STOCK NO. V501XNM1610*01-