


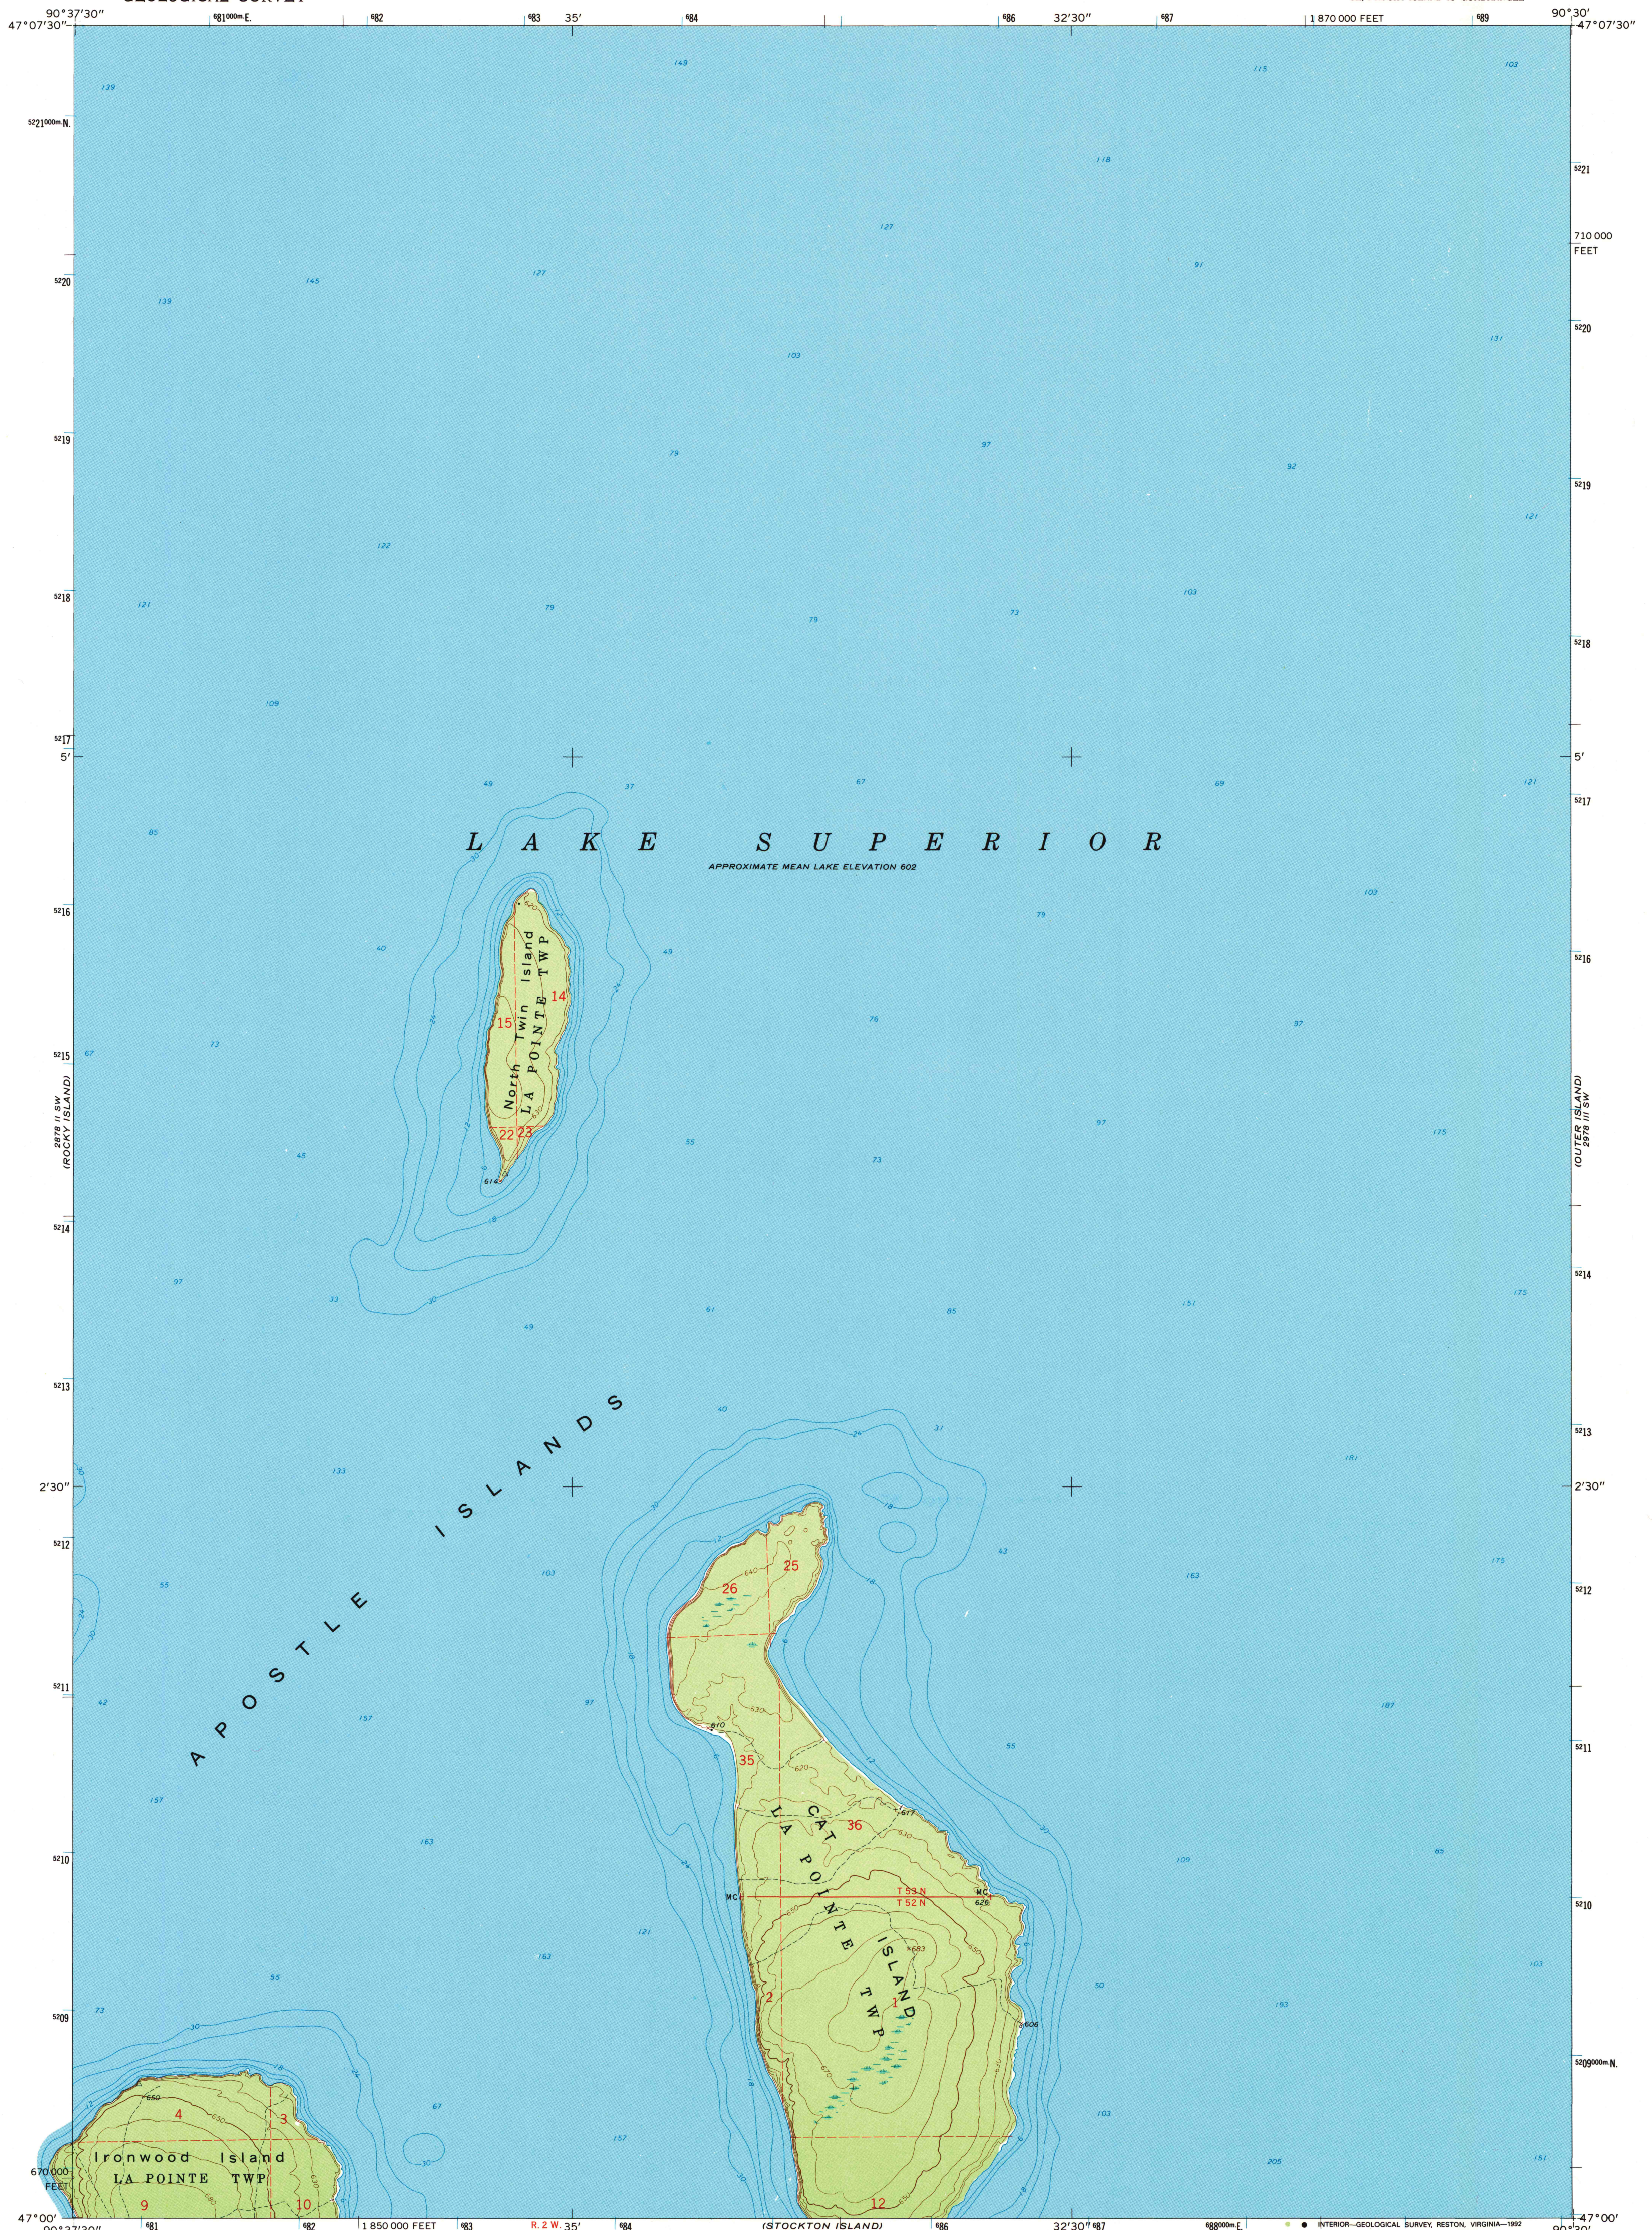

Mapped, edited, and published by the Geological Survey
in cooperation with State of Wisconsin agencies

Control by USGS and USC&GS

Topography by photogrammetric methods from aerial
photographs taken 1963. Field examination 1963
Selected hydrographic data compiled from U.S. Lake Survey
Chart 961 (1961). This information is not intended
for navigational purposes

Polyconic projection. 1927 North American datum
10,000-foot grid based on Wisconsin coordinate system,
zone 15, shown in blue
1000-meter Universal Transverse Mercator grid ticks,
zone 15, shown in blue

Map photoinspected 1975
No major culture or drainage changes observed

UTM GRID AND 1963 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

SCALE 1:24,000
1 1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
1 5 0 5 10 KILOMETER
CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS LOW WATER 601.6 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND WISCONSIN GEOLOGICAL AND NATURAL HISTORY SURVEY, MADISON, WISCONSIN 53706
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST
ARTHUR H. ROBINSON MAP LIBRARY
University of Wisconsin-Madison

FEB 8 2005



ROAD CLASSIFICATION
Trails

CAT ISLAND, WIS.
SE/4 ROCKY ISLAND 15' QUADRANGLE
47090-A5-TF-024

The difference between 1927 North American Datum and North
American Datum of 1983 (NAD 83) for 7.5-minute intersections
is given in USGS Bulletin 1875. The NAD 83 is shown by
dashed corner ticks

1963
PHOTOINSPECTED 1975
DMA 2878 II SE—SERIES V861

1975
copy
1-2