


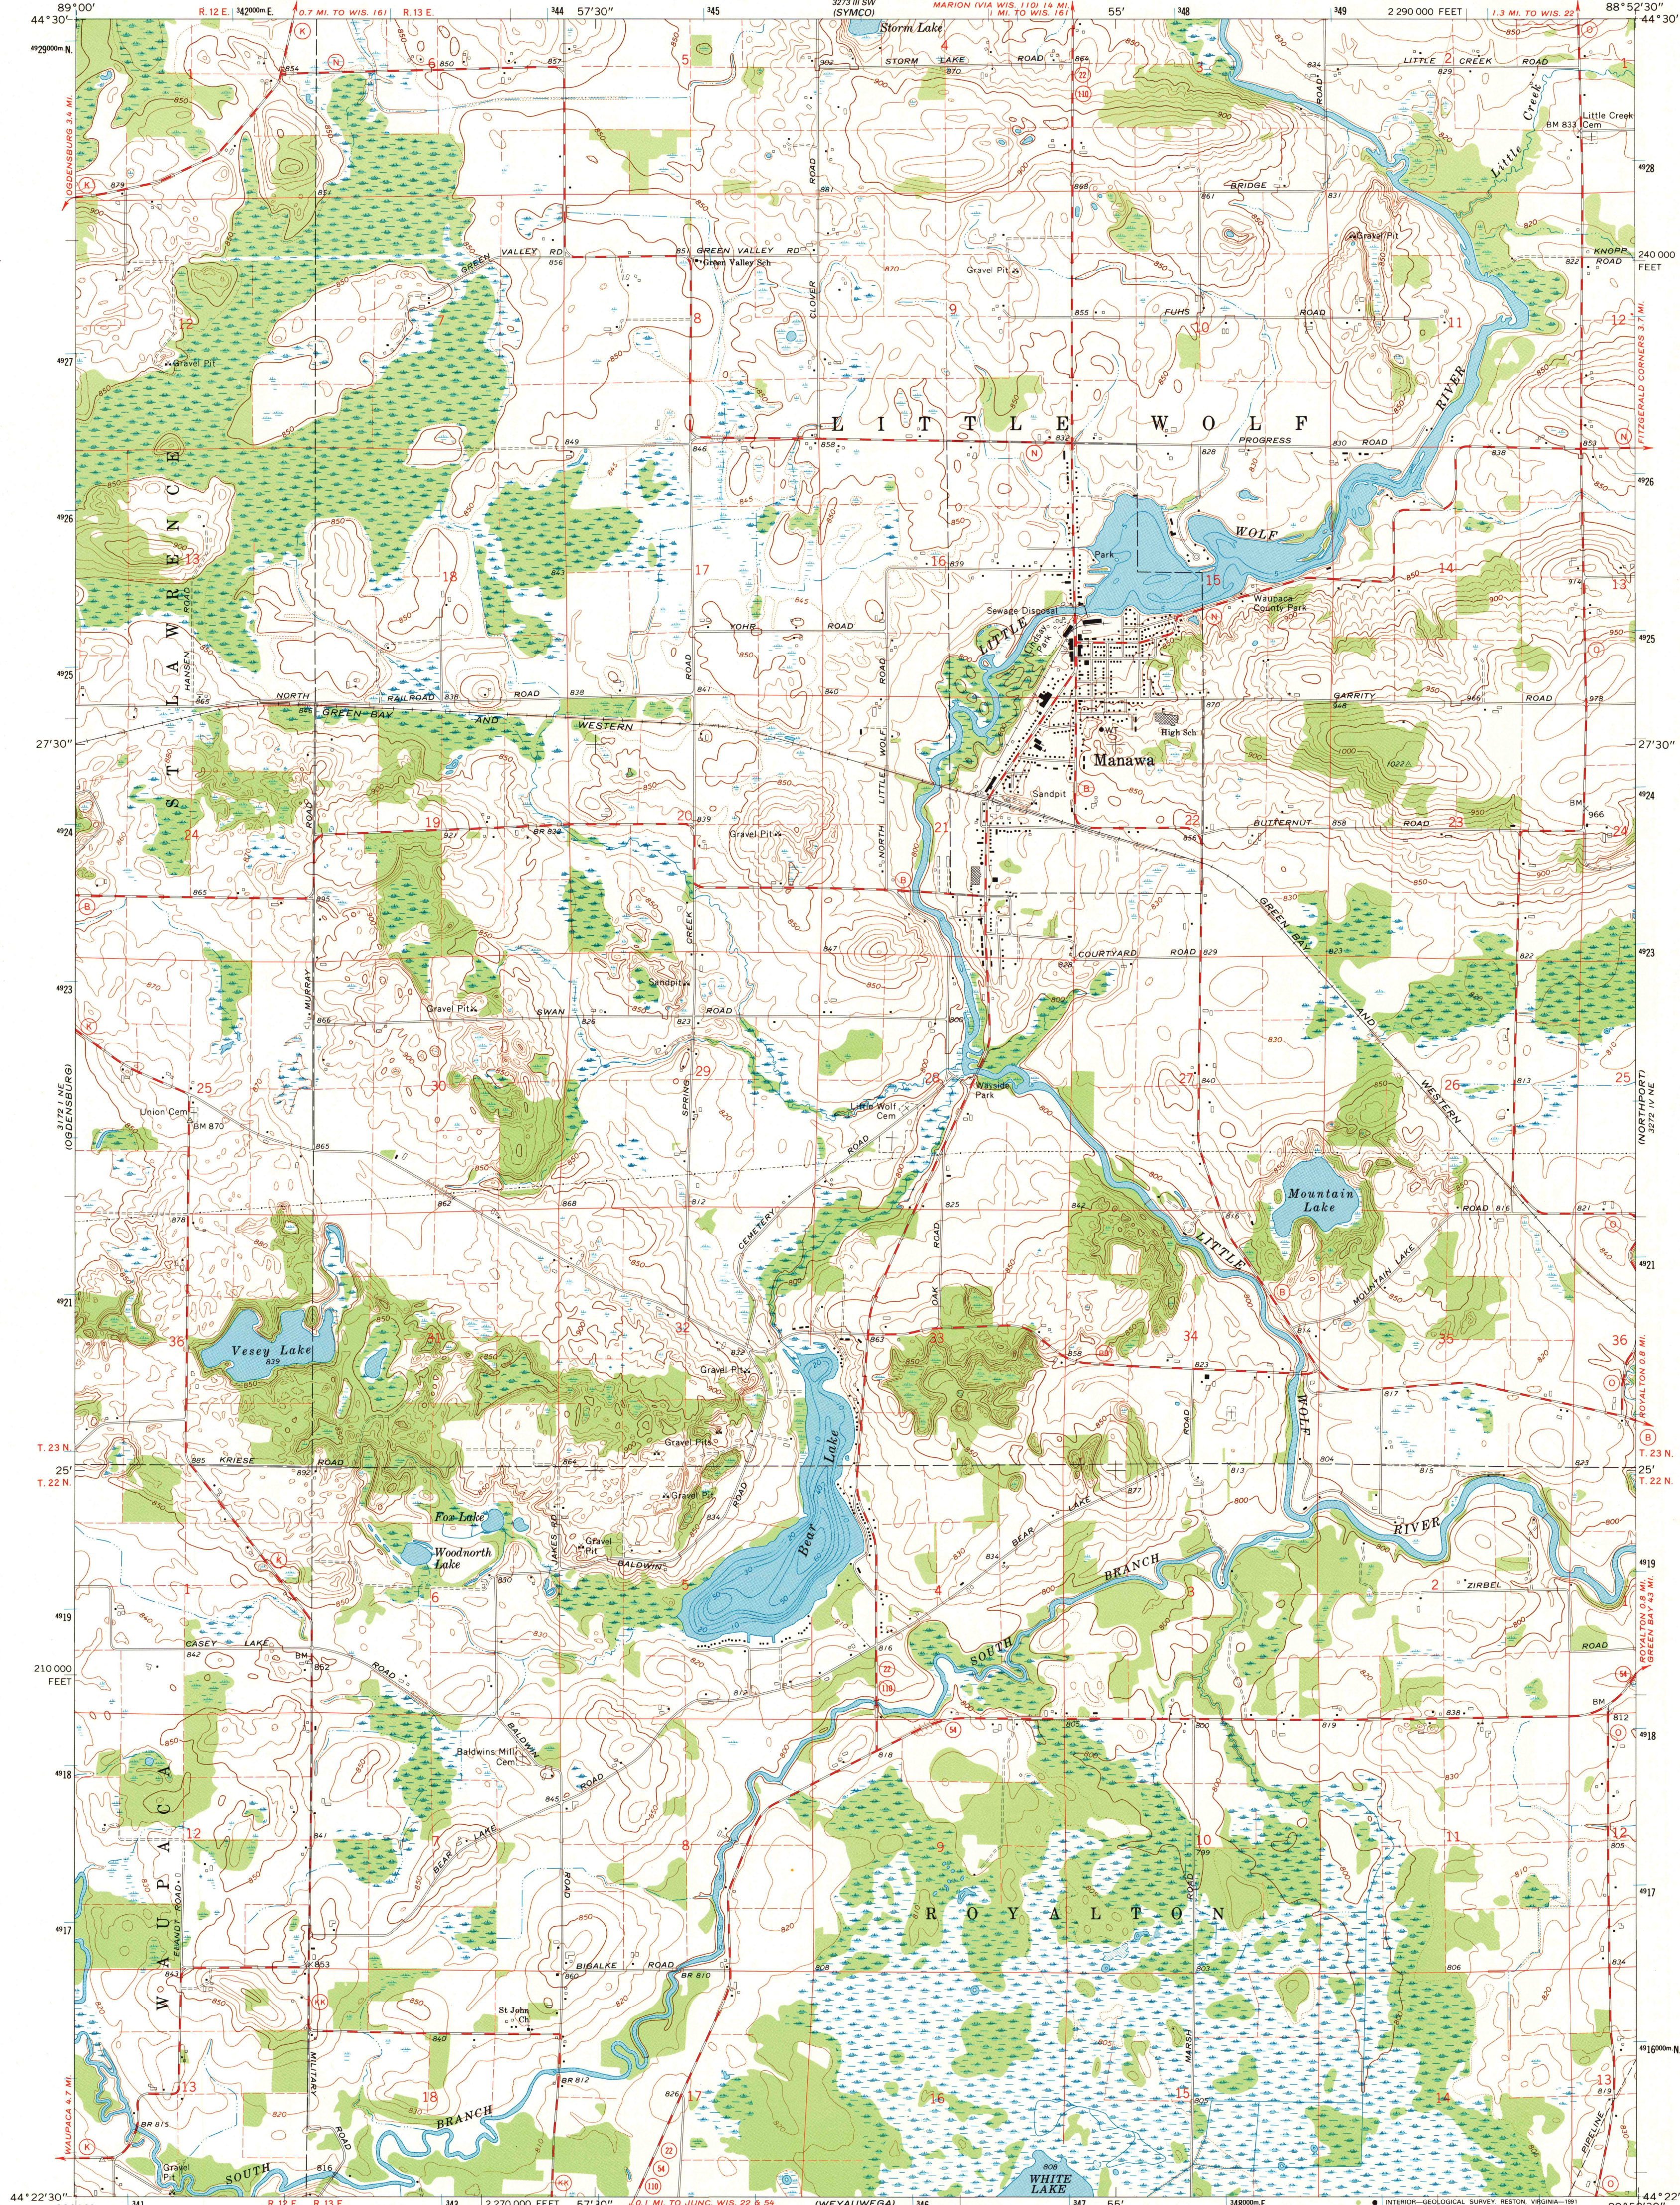

Mapped, edited, and published by the Geological Survey
in cooperation with the Wisconsin Highway Commission
and Wisconsin Geological and Natural History Survey

Control by USGS and USC&GS

Topography by photogrammetric methods from aerial
photographs taken 1968. Field checked 1969

Depth curves compiled from charts furnished by
Wisconsin Department of Natural Resources

Polyconic projection. 1927 North American datum
10,000-foot grid based on Wisconsin coordinate system, central zone
1000-meter Universal Transverse Mercator grid ticks,
zone 16, shown in blue

Map photoinspected 1982
No major culture or drainage changes observed

SCALE 1:24,000

CONTOUR INTERVAL 10 FEET
DOTTED LINES REPRESENT 5-FOOT CONTOURS
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND WISCONSIN GEOLOGICAL AND NATURAL HISTORY SURVEY, MADISON, WISCONSIN 53706
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

Secondary highway, all weather, Light-duty road, all weather,
hard surface improved surface

Unimproved road, fair or dry
weather

State Route

WISCONSIN

U.S. Regional
Depository Copy
DO NOT DISCARD

MANAWA, WIS.

NW 1/4 WEYAUWEGA 15' QUADRANGLE
44088-D8-TF-024

1969
PHOTOINSPECTED 1982
DMA 3272 IV NW-SERIES V861

The difference between 1927 North American Datum and North
American Datum of 1983 (NAD 83) for 7.5-minute intersections
is given in USGS Bulletin 1875. The NAD 83 is shown by
dashed corner ticks

A.H. ROBINSON
MAP LIBRARY

JAN 22 1992

University of Wisconsin
Madison

1982
Copy
1-1