


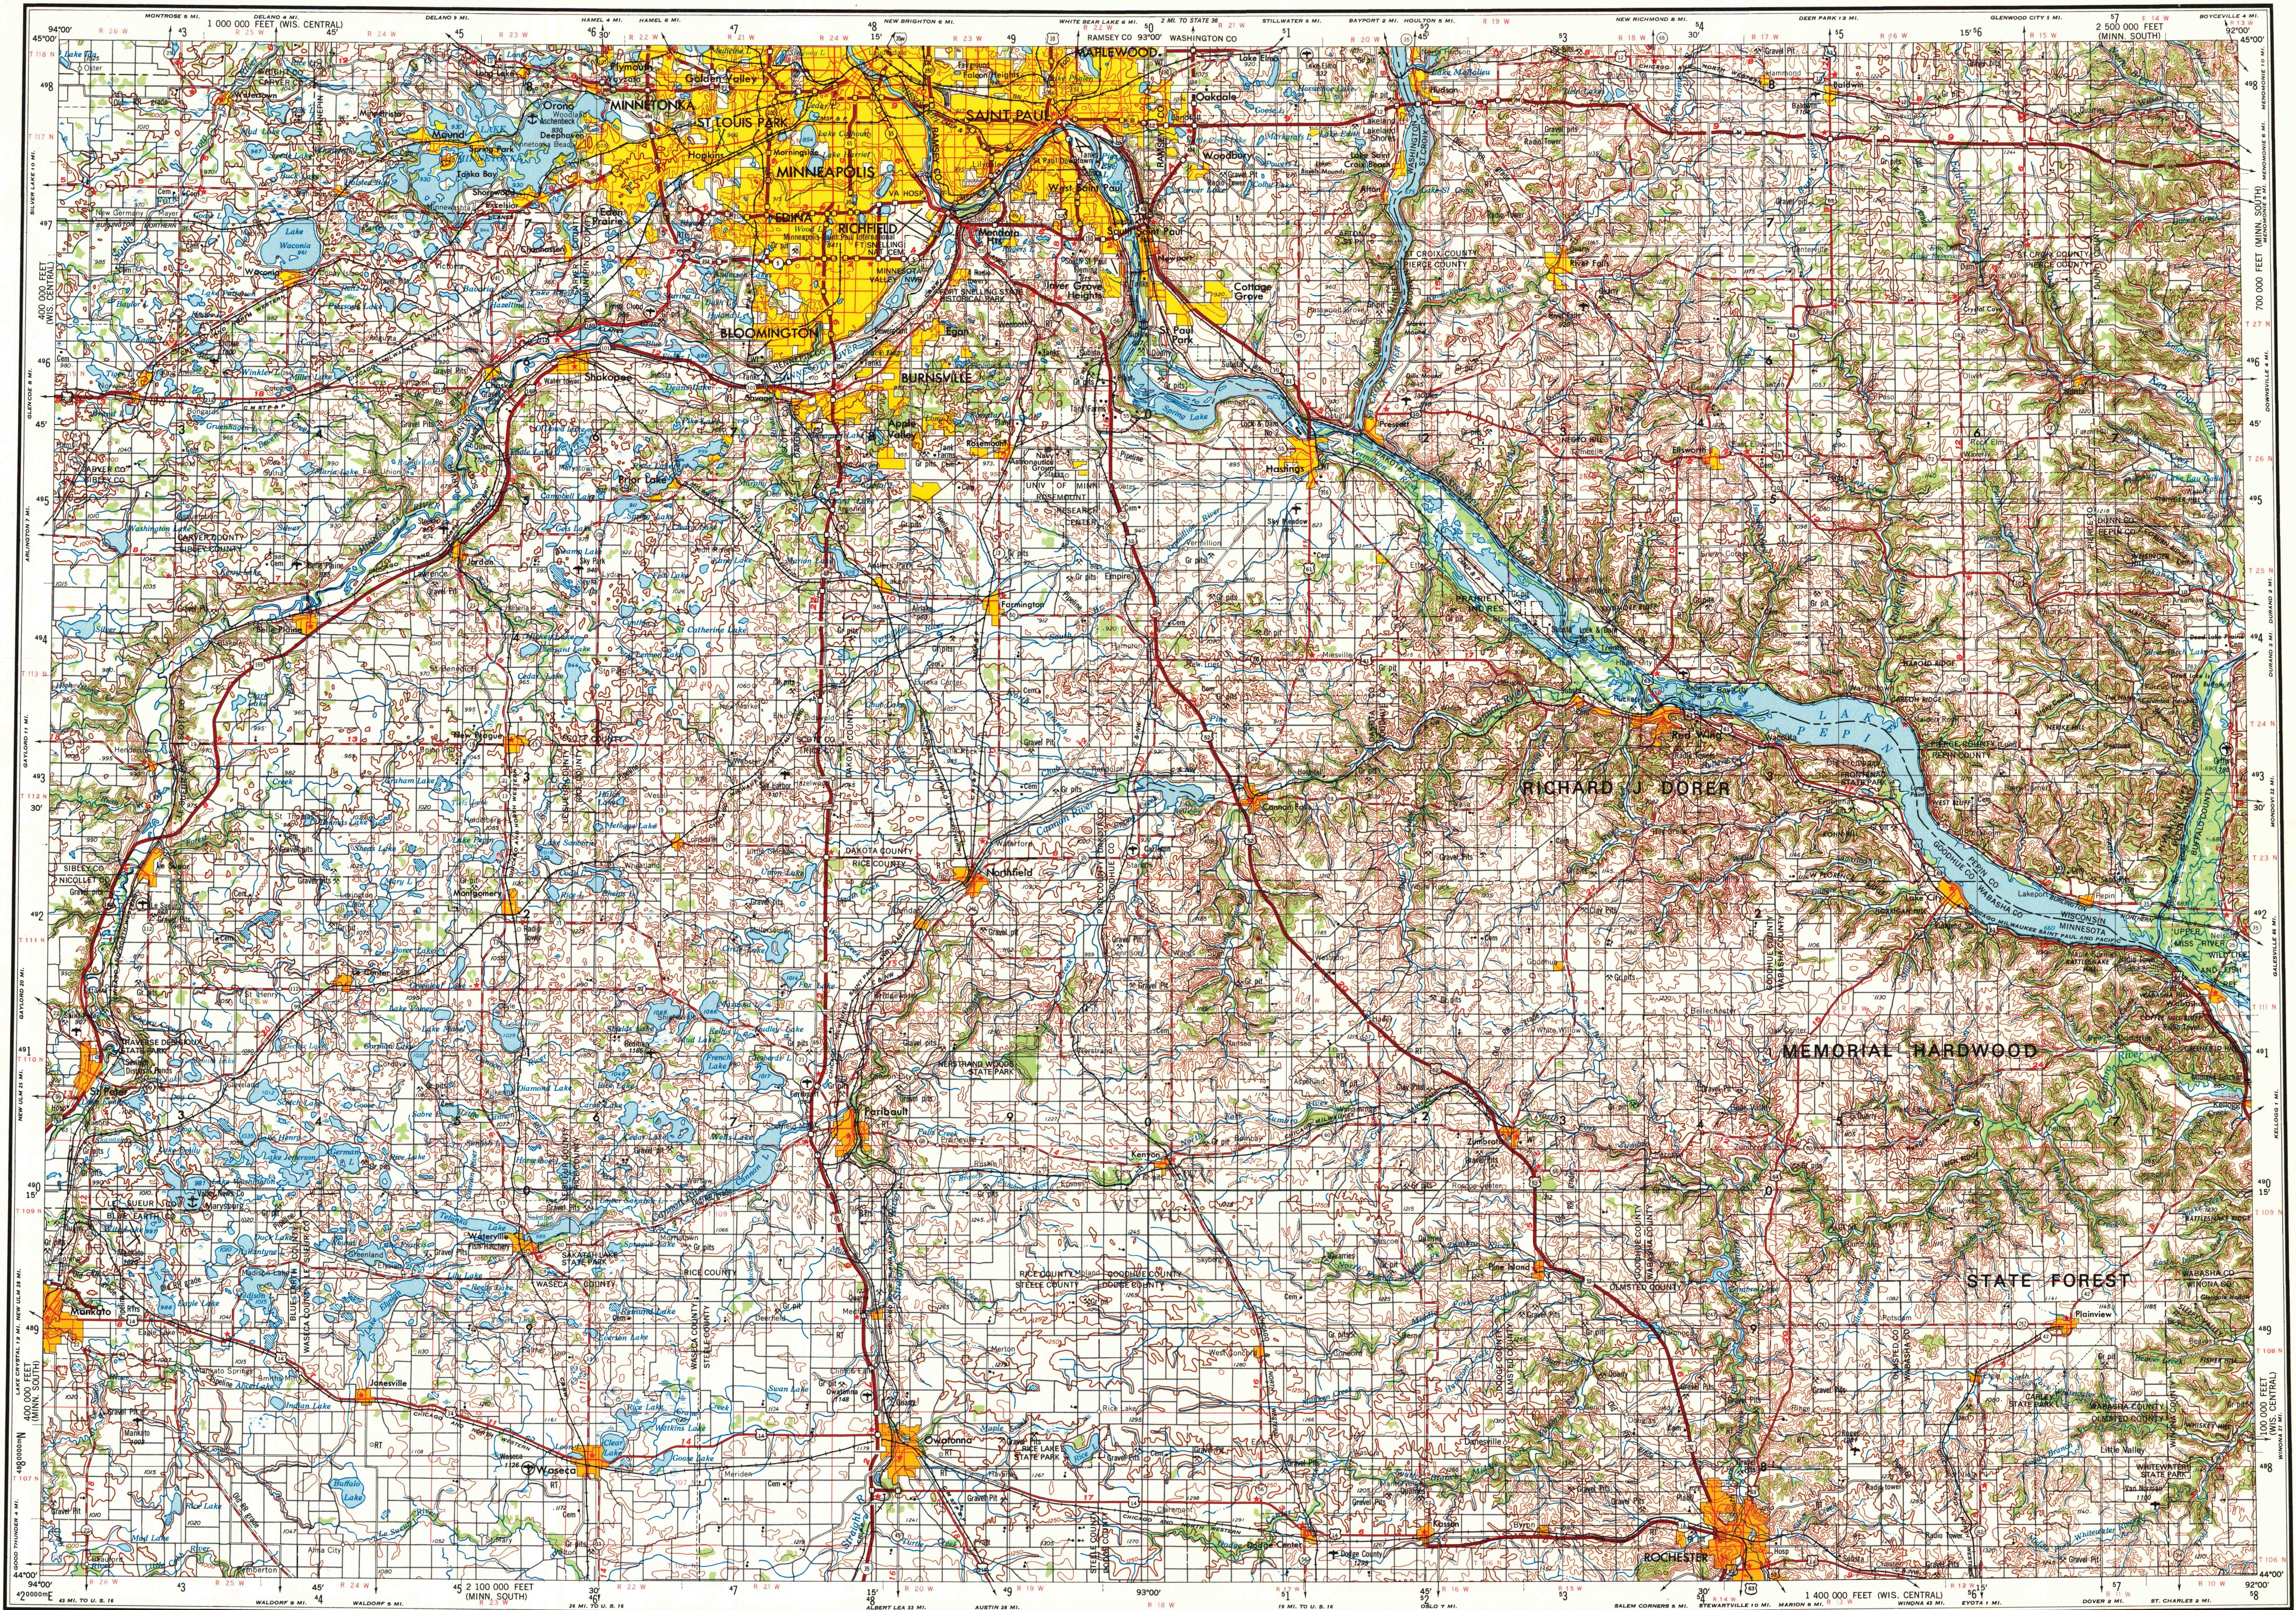

Prepared by the Defense Mapping Agency Topographic Center, Washington, D. C. Compiled in 1956 by photogrammetric methods. Aerial photography 1953. Photographs field annotated 1953. Revised by the U. S. Geological Survey from aerial photographs taken 1976 and other source data. Revised information not field checked. Map edited 1979.
100,000-foot grids based on Minnesota coordinate system, south zone and Wisconsin coordinate system, central zone.
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS

Single track
Double or multiple track
Standard gauge
Narrow gauge

BOUNDARIES

International
State
County
Park or reservation

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Fair or dry weather, unimproved surface
Interchange

Other

Landmark: School; Church; Other
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line

Scale

Scale 1:250,000
0 5 10 15 20 25 30 Statute Miles
0 5 10 15 20 25 30 Kilometers
0 5 10 15 20 25 30 Nautical Miles

CONTOUR INTERVAL 50 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 15

1979 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 5° (90 MILS) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 3½° (60 MILS) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225 OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: SYMBE

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure bounding the line within in the top or bottom margin, or on the line itself.
3. Locate first HORIZONTAL grid line to point and read LARGE figure bounding the line within in the left or right margin, or on the line itself.
4. Estimate location from grid line to point.
5. Estimate location from grid line to point.
6. Estimate location from grid line to point.

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: SYMBE

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure bounding the line within in the top or bottom margin, or on the line itself.
3. Locate first HORIZONTAL grid line to point and read LARGE figure bounding the line within in the left or right margin, or on the line itself.
4. Estimate location from grid line to point.
5. Estimate location from grid line to point.
6. Estimate location from grid line to point.

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: SYMBE

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure bounding the line within in the top or bottom margin, or on the line itself.
3. Locate first HORIZONTAL grid line to point and read LARGE figure bounding the line within in the left or right margin, or on the line itself.
4. Estimate location from grid line to point.
5. Estimate location from grid line to point.
6. Estimate location from grid line to point.

SAINT PAUL, MINNESOTA; WISCONSIN

1953

REVISION 1979

3700
6250
1056
CORR. 5