



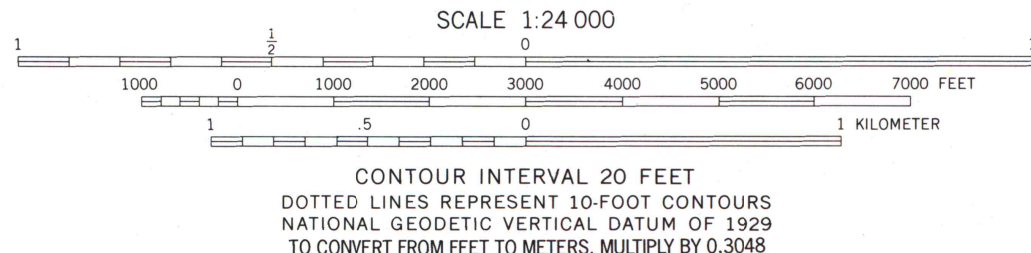

Produced by the United States Geological Survey
Topography compiled 1956 and 1957. Planimetry derived from imagery taken
1976. Photorevised using imagery dated 1994; no major culture
or drainage changes observed. Survey control current as of 1969
Boundaries, other than corporate, revised 1998
North American Datum of 1983 (NAD 83) is shown by dashed
corner ticks. The values of the shift between NAD 27 and NAD 83
for 7.5-minute intersections are obtainable from National Geodetic
Survey NADCON software.
Projection: Ohio coordinate system, south zone
(Lambert conformal conic)
10 000-foot ticks: Ohio coordinate system, south zone and
West Virginia coordinate system, north zone
1000-meter Universal Transverse Mercator grid, zone 17
North American Datum of 1983 (NAD 83) is shown by dashed
corner ticks. The values of the shift between NAD 27 and NAD 83
for 7.5-minute intersections are obtainable from National Geodetic
Survey NADCON software.
The state boundary as shown represents the approximate position of the
low water line as determined from U. S. Corps of Engineers Ohio
River Charts, surveyed 1913, and supplementary information.
There may be private inholdings within the boundaries of
the National or State reservations shown on this map.
Land lines based on the Ohio River Base. Dotted land lines
established by private subdivision of the Ohio Company Purchase
Information shown in purple may not meet USGS content standards
and may conflict with previously mapped contours.



ROAD CLASSIFICATION
Primary highway, hard surface ——— Light-duty road, hard or improved surface ———
Secondary highway, hard surface ——— Unimproved road ———
Interstate Route ——— U. S. Route ——— State Route ———

BELMONT, W. VA.—OHIO

1994

NIMA 4762 IV NE—SERIES Y852

A.H. ROBINSON
MAP LIBRARY
DEC 18 1998
University of Wisconsin
Madison
U.S. Regional
Geological Survey
DO NOT DISCARD

