


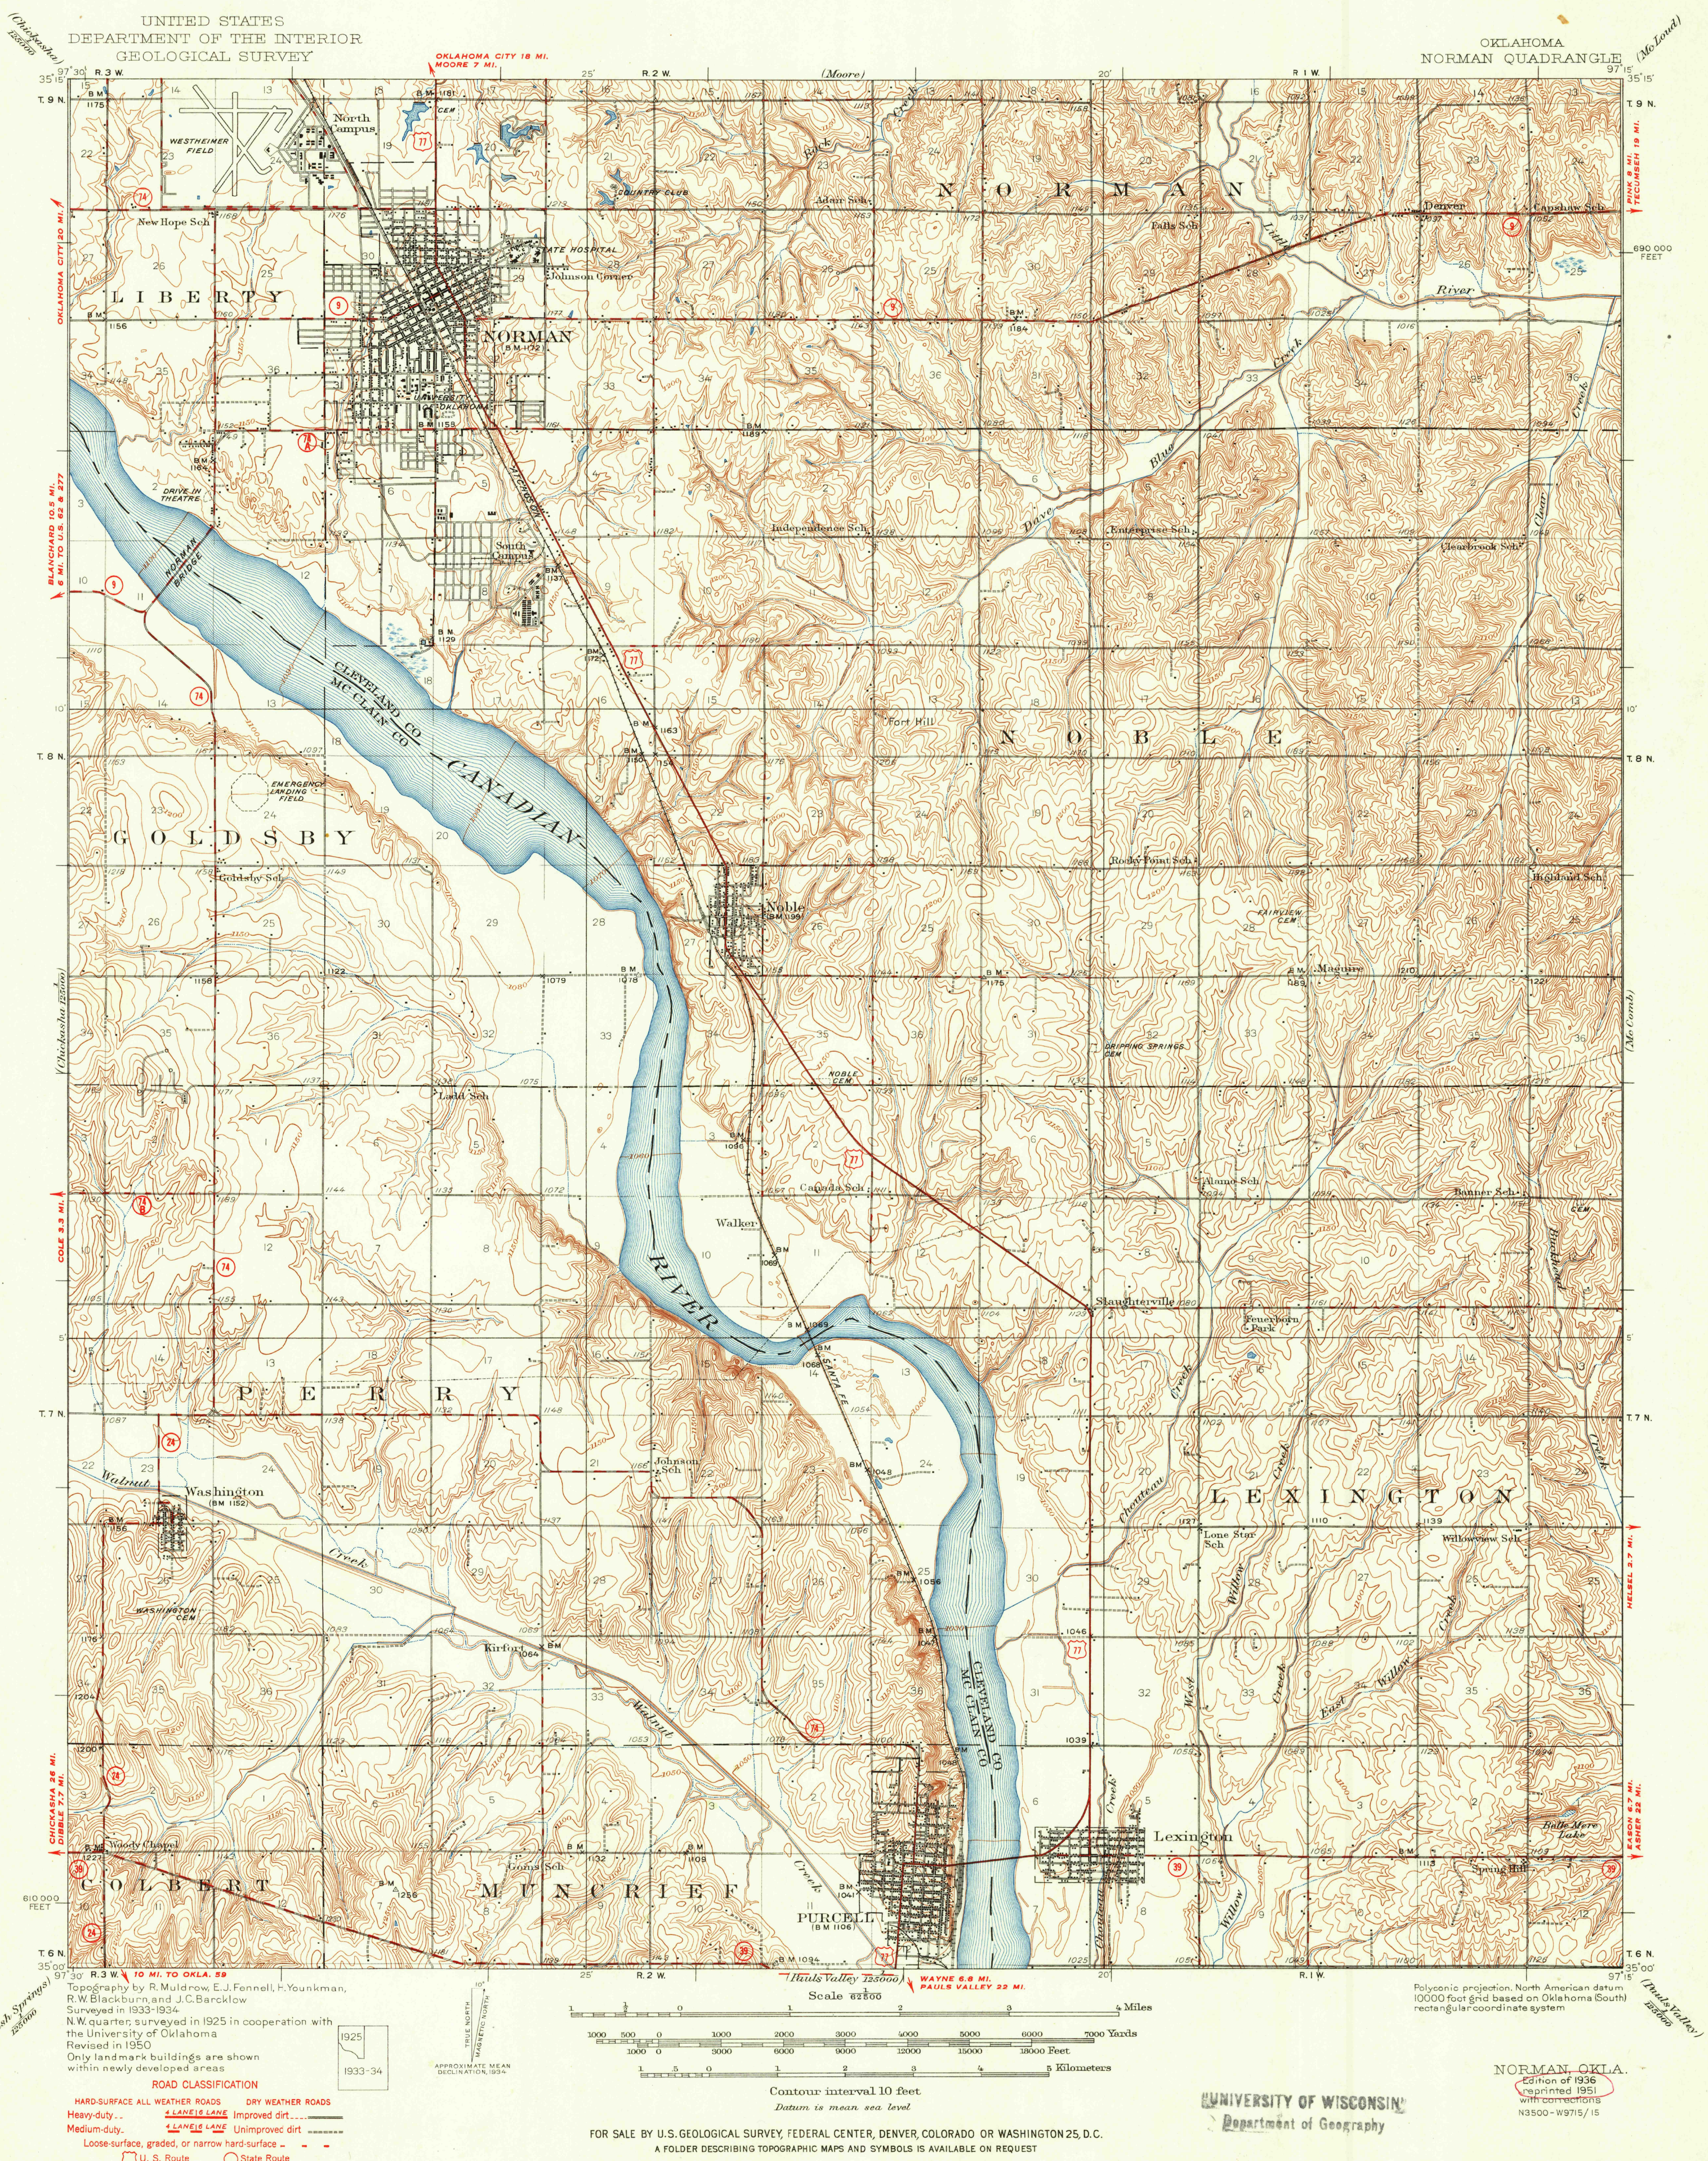

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

OKLAHOMA
NORMAN QUADRANGLE

Topography by R. Muldrow, E. J. Fennell, F. Younkman,
R. W. Blackburn and J. C. Barcklow
Surveyed in 1933-1934
N.W. quarter, surveyed in 1925 in cooperation with
the University of Oklahoma
Revised in 1950
Only landmark buildings are shown
within newly developed areas

ROAD CLASSIFICATION
HARD-SURFACE ALL WEATHER ROADS DRY WEATHER ROADS
Heavy-duty... +LANE 1/2 LANE Improved dirt...
Medium-duty... +LANE 1/2 LANE Unimproved dirt...
Loose-surface, graded, or narrow hard-surface...
U. S. Route State Route

Scale 1:25,000
1 2 3 4 Miles
1000 2000 3000 4000 5000 6000 7000 Yards
1000 2000 3000 4000 5000 6000 7000 Feet
1 2 3 4 Kilometers
Contour interval 10 feet
Datum is mean sea level

Polycyclic projection, North American datum
10000 foot grid based on Oklahoma (South)
rectangular coordinate system

UNIVERSITY OF WISCONSIN
Department of Geography

NORMAN, OKLA.
Edition of 1936
reprinted 1951
with corrections
N3500-W9715/15

FOR SALE BY U.S. GEOLOGICAL SURVEY, FEDERAL CENTER, DENVER, COLORADO OR WASHINGTON 25, D.C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST