


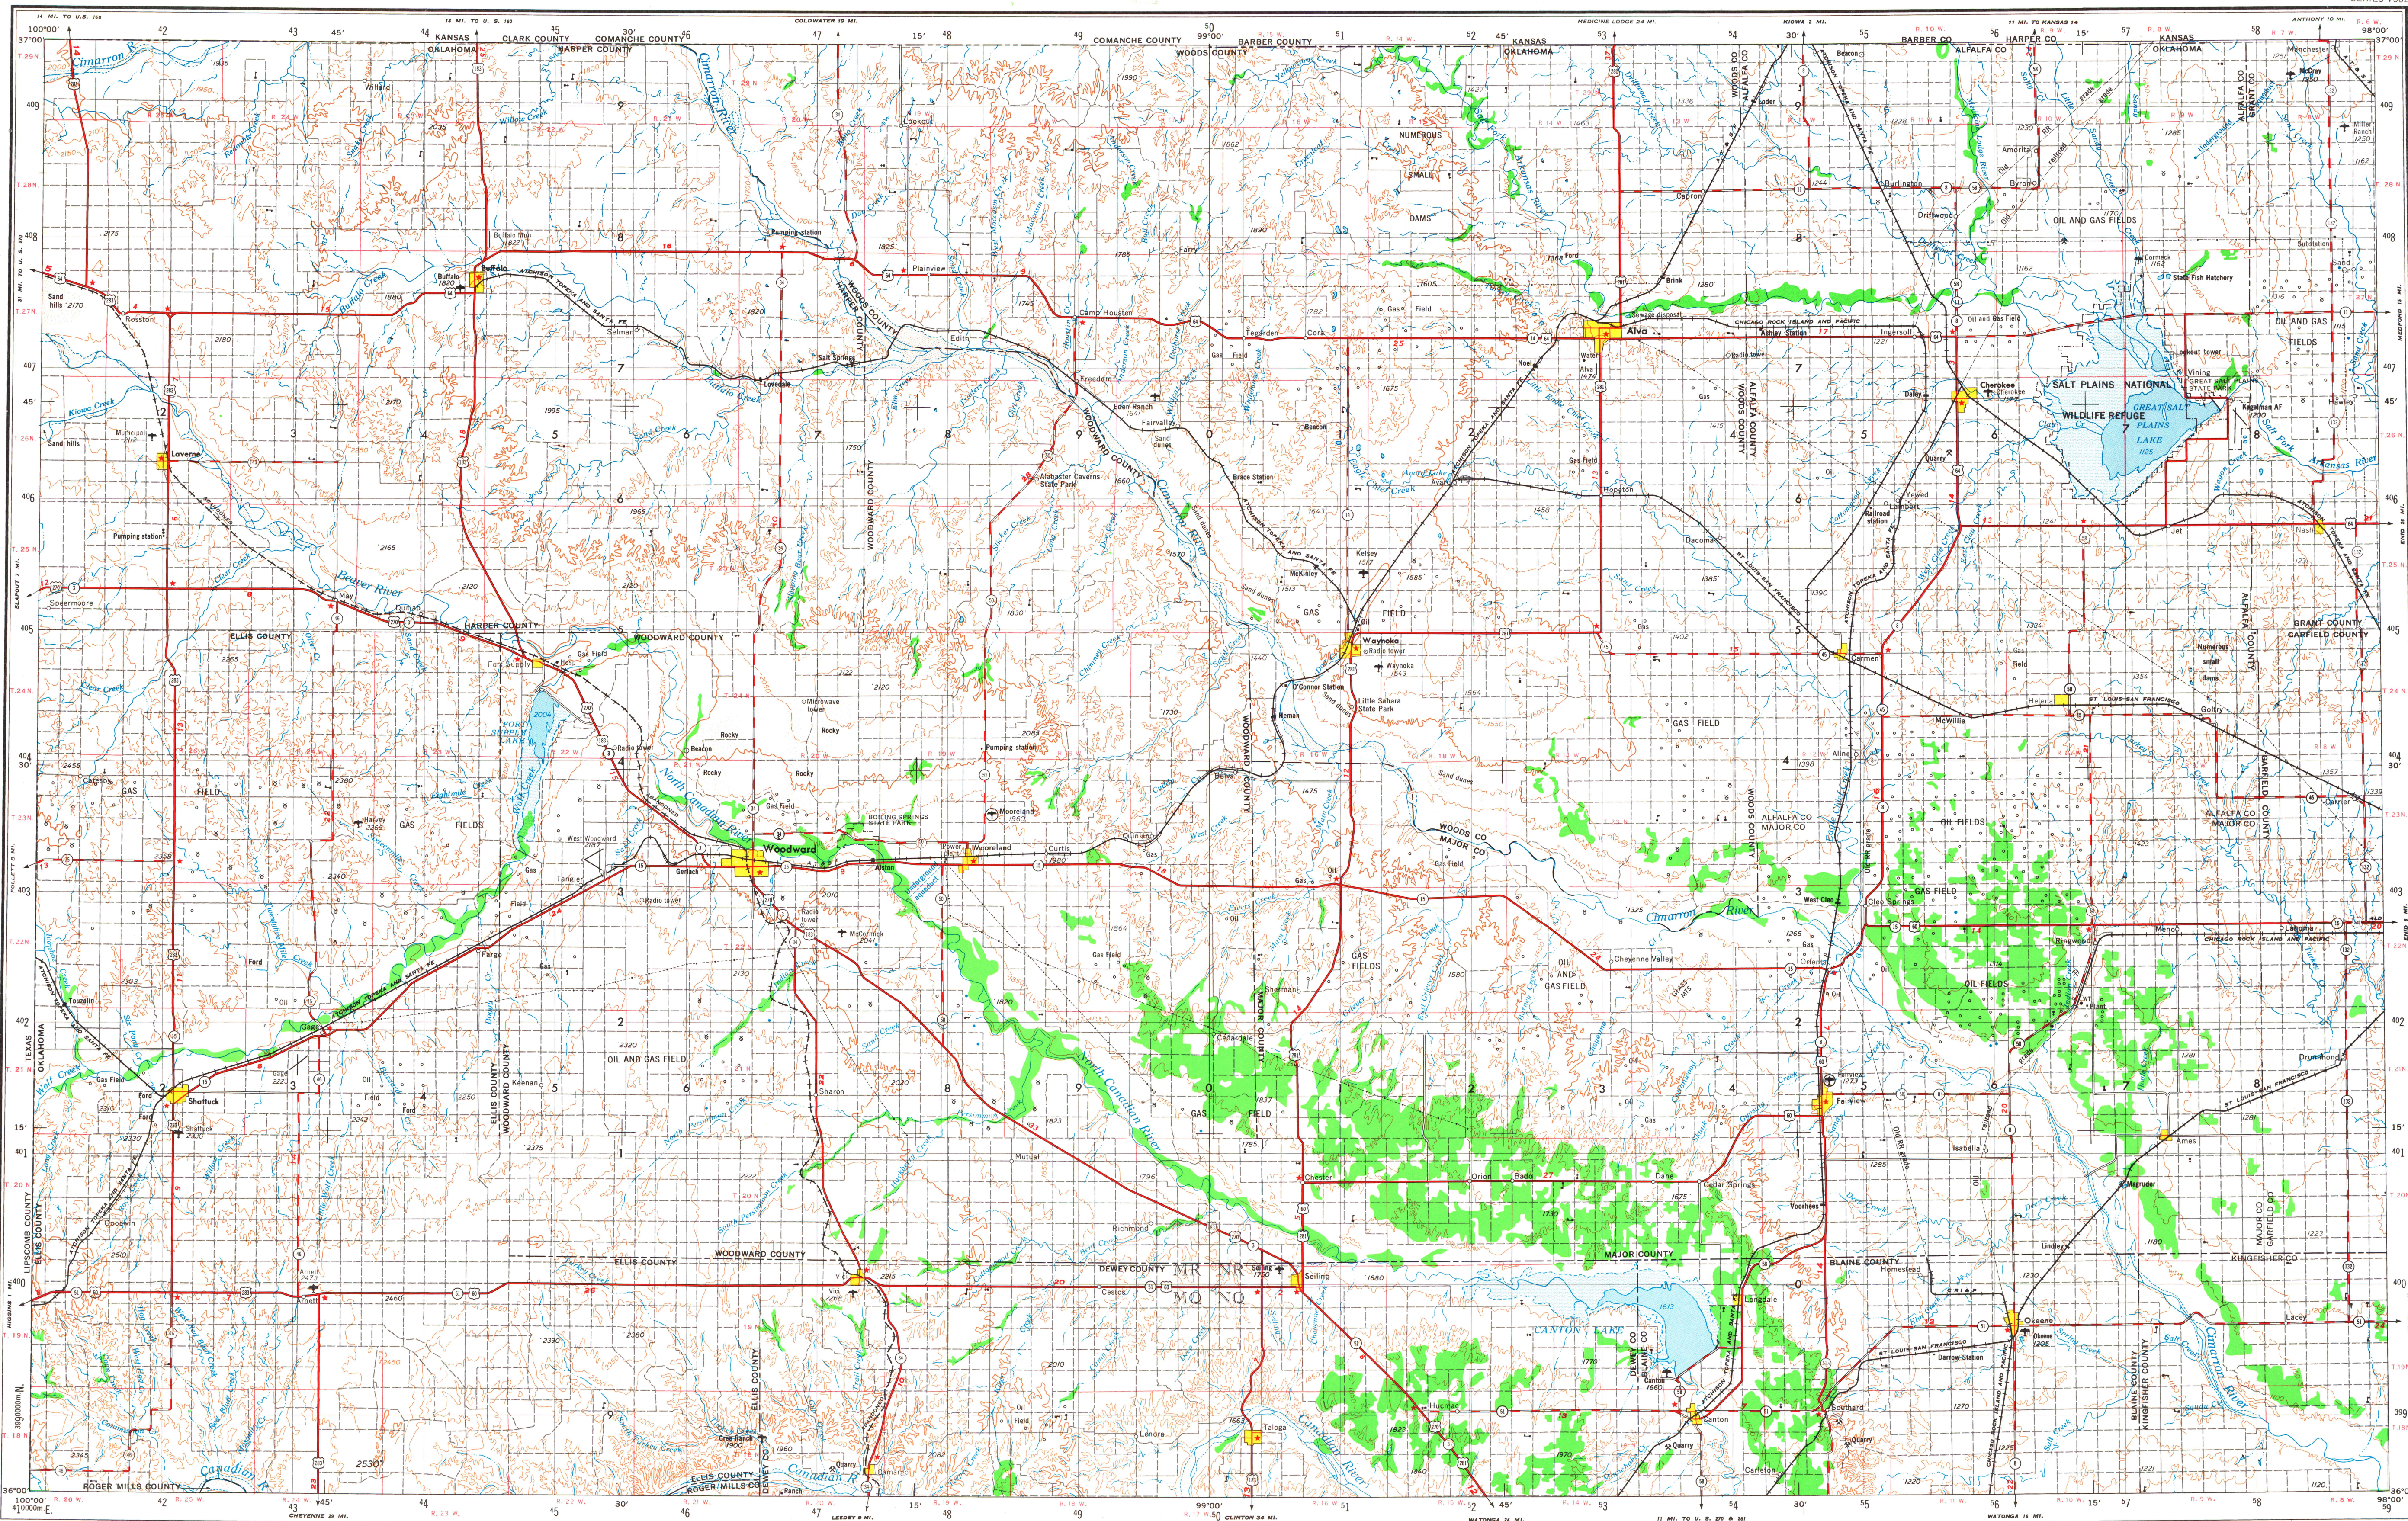

V502, EDITION 3
Prepared by the U.S. Army Topographic Command (ASST), Washington, D.C. Compiled in 1955 by photogrammetric methods. Aerial photographs taken 1954. Photographs field annotated 1955. Revised in 1971 by the U.S. Geological Survey from aerial photographs taken 1968.
Area covered by dashed light-blue pattern is subject to controlled inundation.
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Grand Coulee
Sun Valley

RAILROADS

Standard gauge
Narrow gauge
State
County
Park or reservation

Other features

Route markers: Interstate, U.S., State
Landmark: School; Church; Other
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line

Map Labels: LOS ANGELES, OMAHA, GALVESTON, Laramie, Grand Coulee, Sun Valley

Scale 1:250,000

0 5 10 15 20 Statute Miles

0 5 10 15 20 Kilometers

CONTOUR INTERVAL 100 FEET
WITH SUPPLEMENTARY CONTOURS AT 50 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 14

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 10° (180 MILES) EASTERLY FOR THE CENTER OF THE WEST TO 30° (180 MILES) EASTERLY FOR THE CENTER OF THE EAST COAST

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20542

MAP AND AIR PHOTO LIBRARY

MAY 19 1974

University of Wisconsin

LOCATION DIAGRAM

Grid showing township and range coordinates for Woodward, Oklahoma.

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION

14S

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first WESTING and line to LEFT of point and read LARGE figure labeling the one either on the top or bottom margin, or on the line itself.
3. Estimate tenths from grid line to point.
4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the one either on the left or right margin, or on the line itself.
5. Estimate tenths from grid line to point.

SAMPLE REFERENCE

1. Pointing toward 10° in any direction, grid zone designations, etc.

WOODWARD, OKLAHOMA, KANSAS

1955
REVISED 1971

3700
s250
0.56
3

WOODWARD, OKLAHOMA, KANSAS
1955
REVISED 1971
3006-9/3
NJ 14-11.324793