


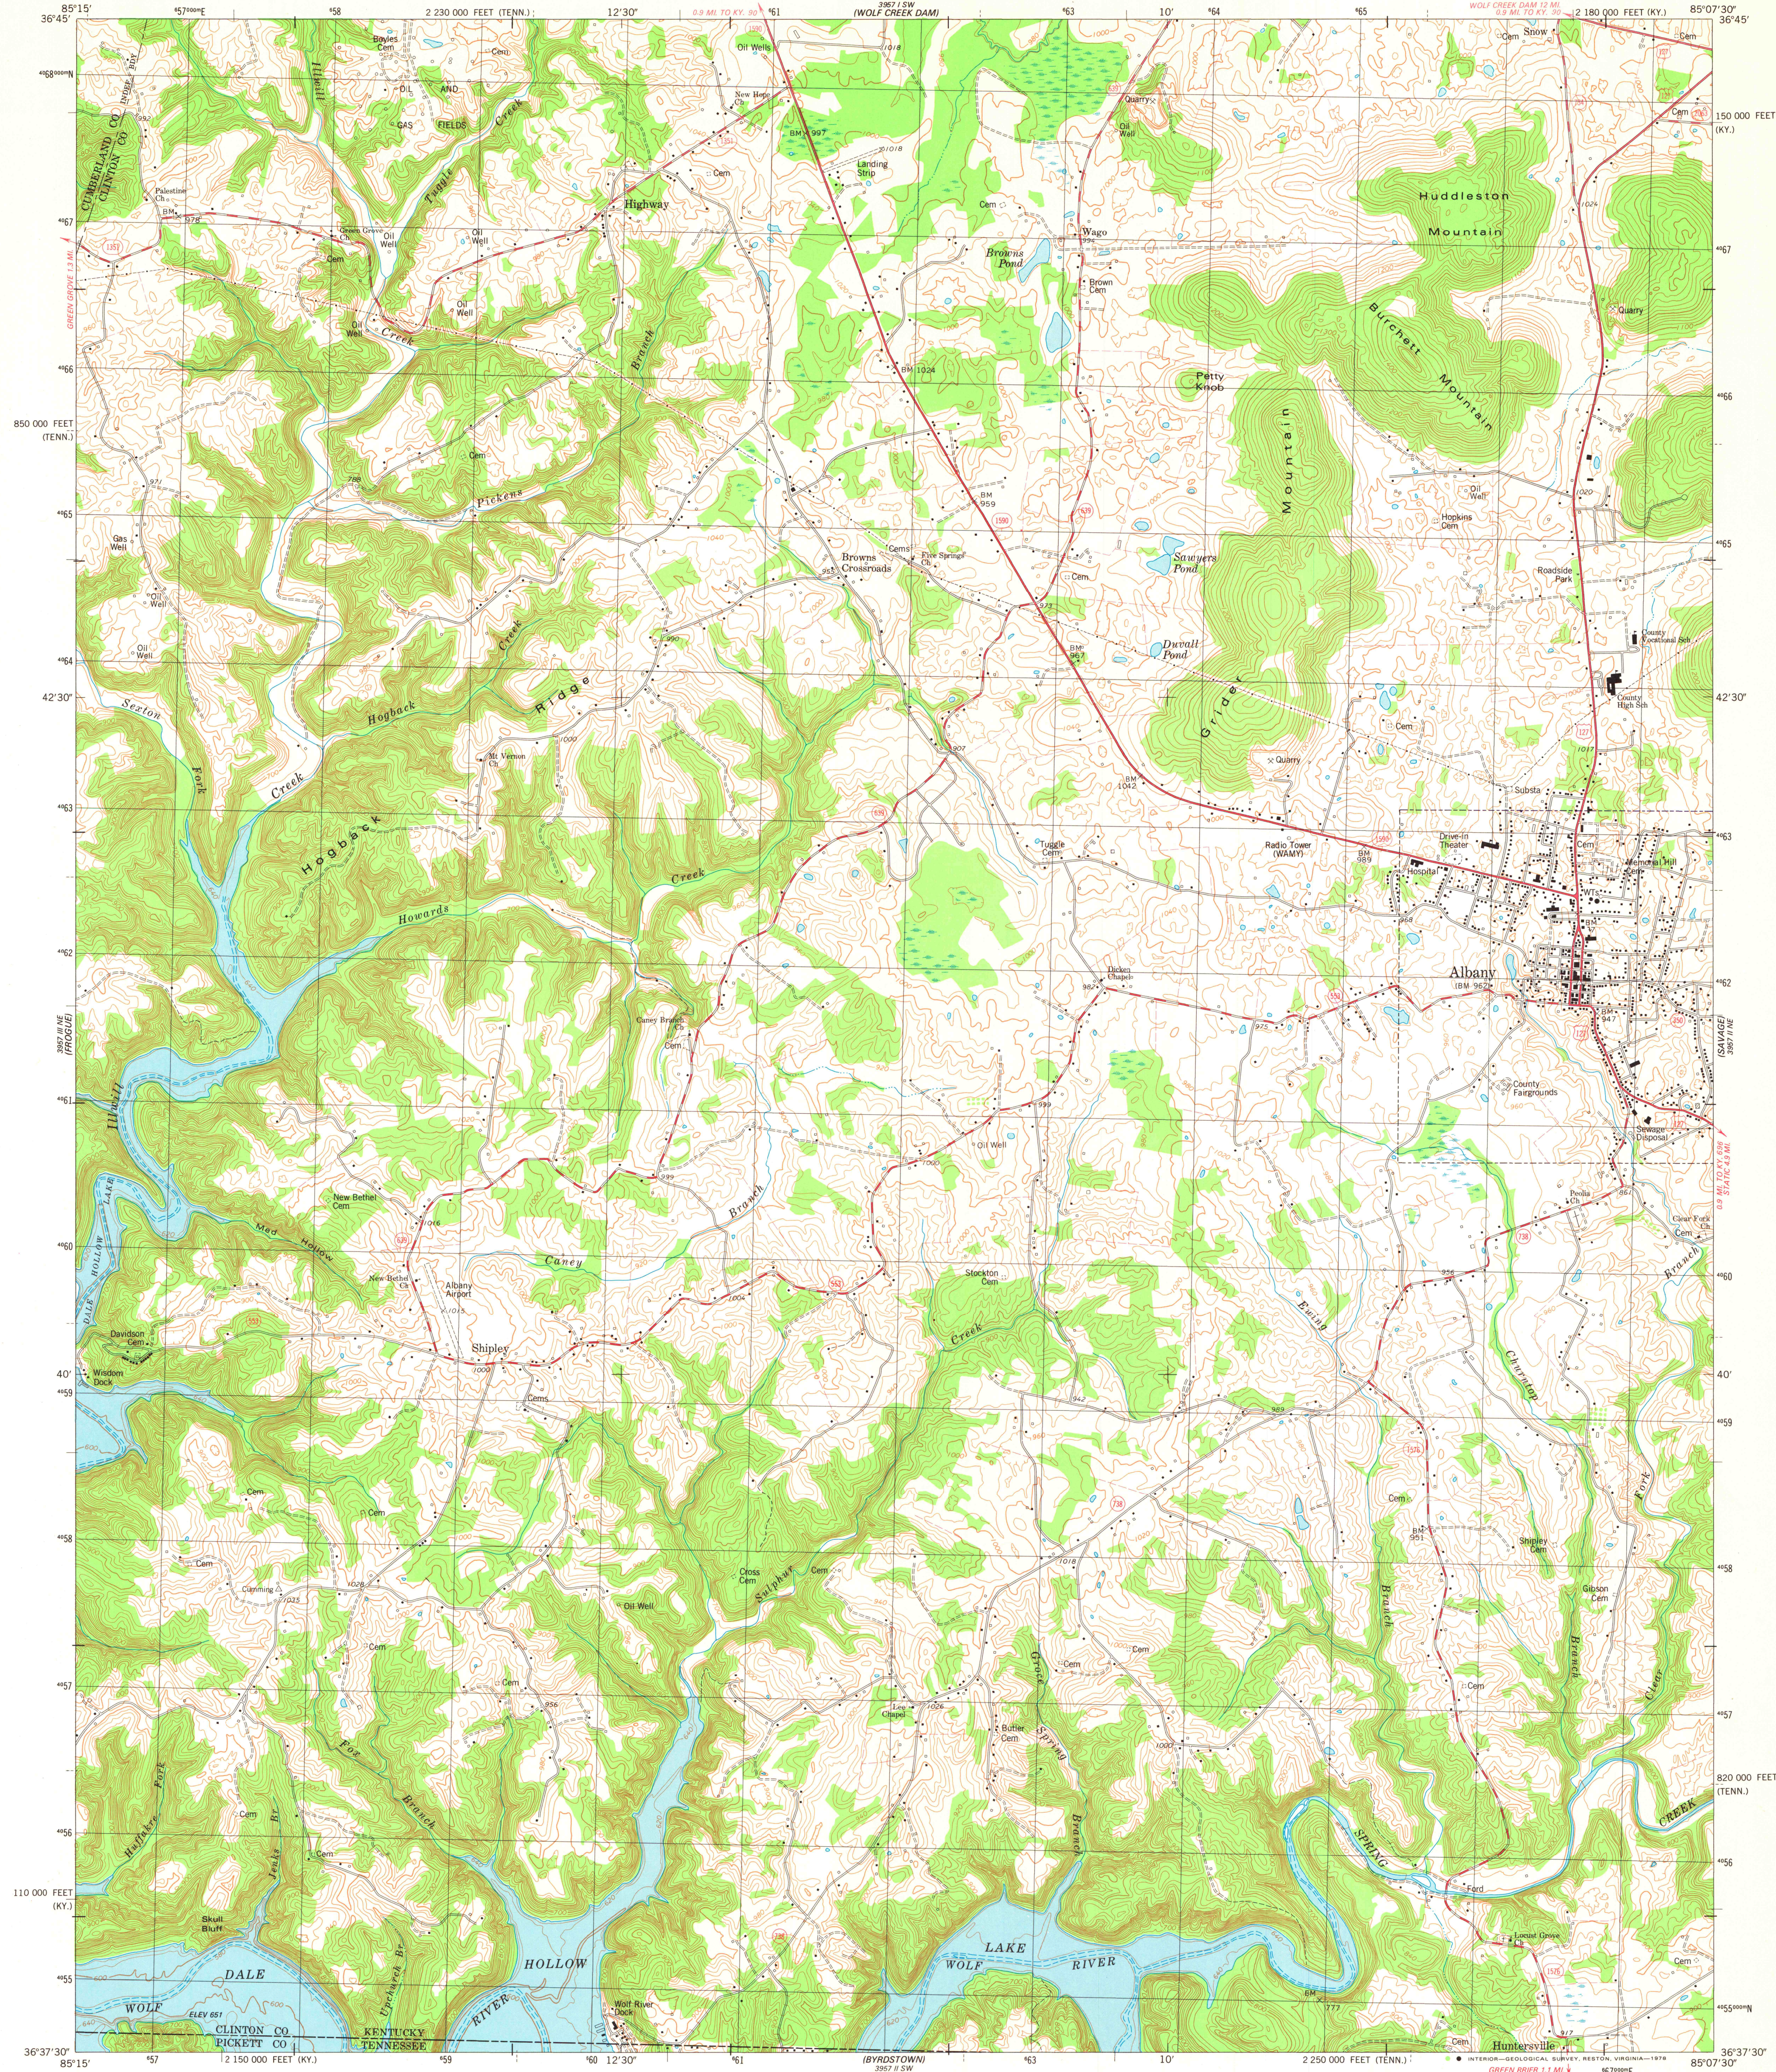


Mapped, edited, and published by the Geological Survey
Control by USGS, NOS/NOAA, and USCE

Topography by photogrammetric methods from aerial photographs
taken 1951. Field checked 1954. Revised from aerial
photographs taken 1975. Field checked 1975. Map edited 1978

Polyconic projection. 1927 North American datum
10,000-foot grid ticks based on Kentucky coordinate system,
south zone and Tennessee coordinate system
1000-meter Universal Transverse Mercator grid, zone 16

Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked
Dale Hollow Lake is subject to controlled inundation to 663 feet
Underwater contours compiled from USCE charts dated 1942



CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092.
KENTUCKY GEOLOGICAL SURVEY, LEXINGTON, KENTUCKY 40506,
KENTUCKY DEPARTMENT OF COMMERCE, FRANKFORT, KENTUCKY 40601,
AND TENNESSEE DIVISION OF GEOLOGY, NASHVILLE, TENN. 37219
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Primary highway, hard surface ——— Light-duty road, hard or improved surface ———
Secondary highway, hard surface ——— Unimproved road ———
Interstate Route U.S. Route State Route

ALBANY, KY.-TENN.
NW/4 BYRDSTOWN 15' QUADRANGLE
N3637.5-W8507.5/7.5

1978

AMS 3957 II NW-SERIES V853