

4459 11 NE
(THOMAS)

4559 III NE
(WILLIAMSON)




Control by USGS and NOS/NOAA

Projection and 10,000-foot grid ticks: Kentucky coordinate

The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5-minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by

Unlabeled wells are gas wells

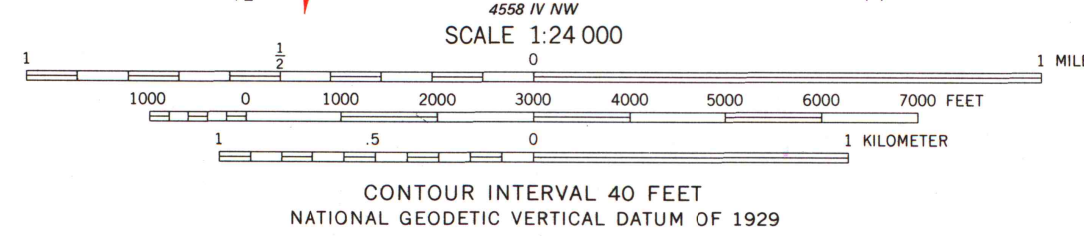

COMPLIES WITH U.S. GEOLOGICAL SURVEY STANDARDS FOR SPATIAL ACCURACY - CLASS 2
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
KENTUCKY GEOLOGICAL SURVEY, LEXINGTON, KENTUCKY 40506
AND KENTUCKY DEPARTMENT OF COMMERCE, FRANKFORT, KENTUCKY 40601
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

Primary highway, hard surface..... Light-duty road, hard or improved surface.....

Secondary highway, hard surface..... Unimproved road.....

FEB 10 1993

University of Wisconsin
Madison

DMA 4559 III SW - SERIES V853

DMA 4559 III SW - SERIES V853

U.S. Regional
Depository Copy
DO NOT DISCARD