


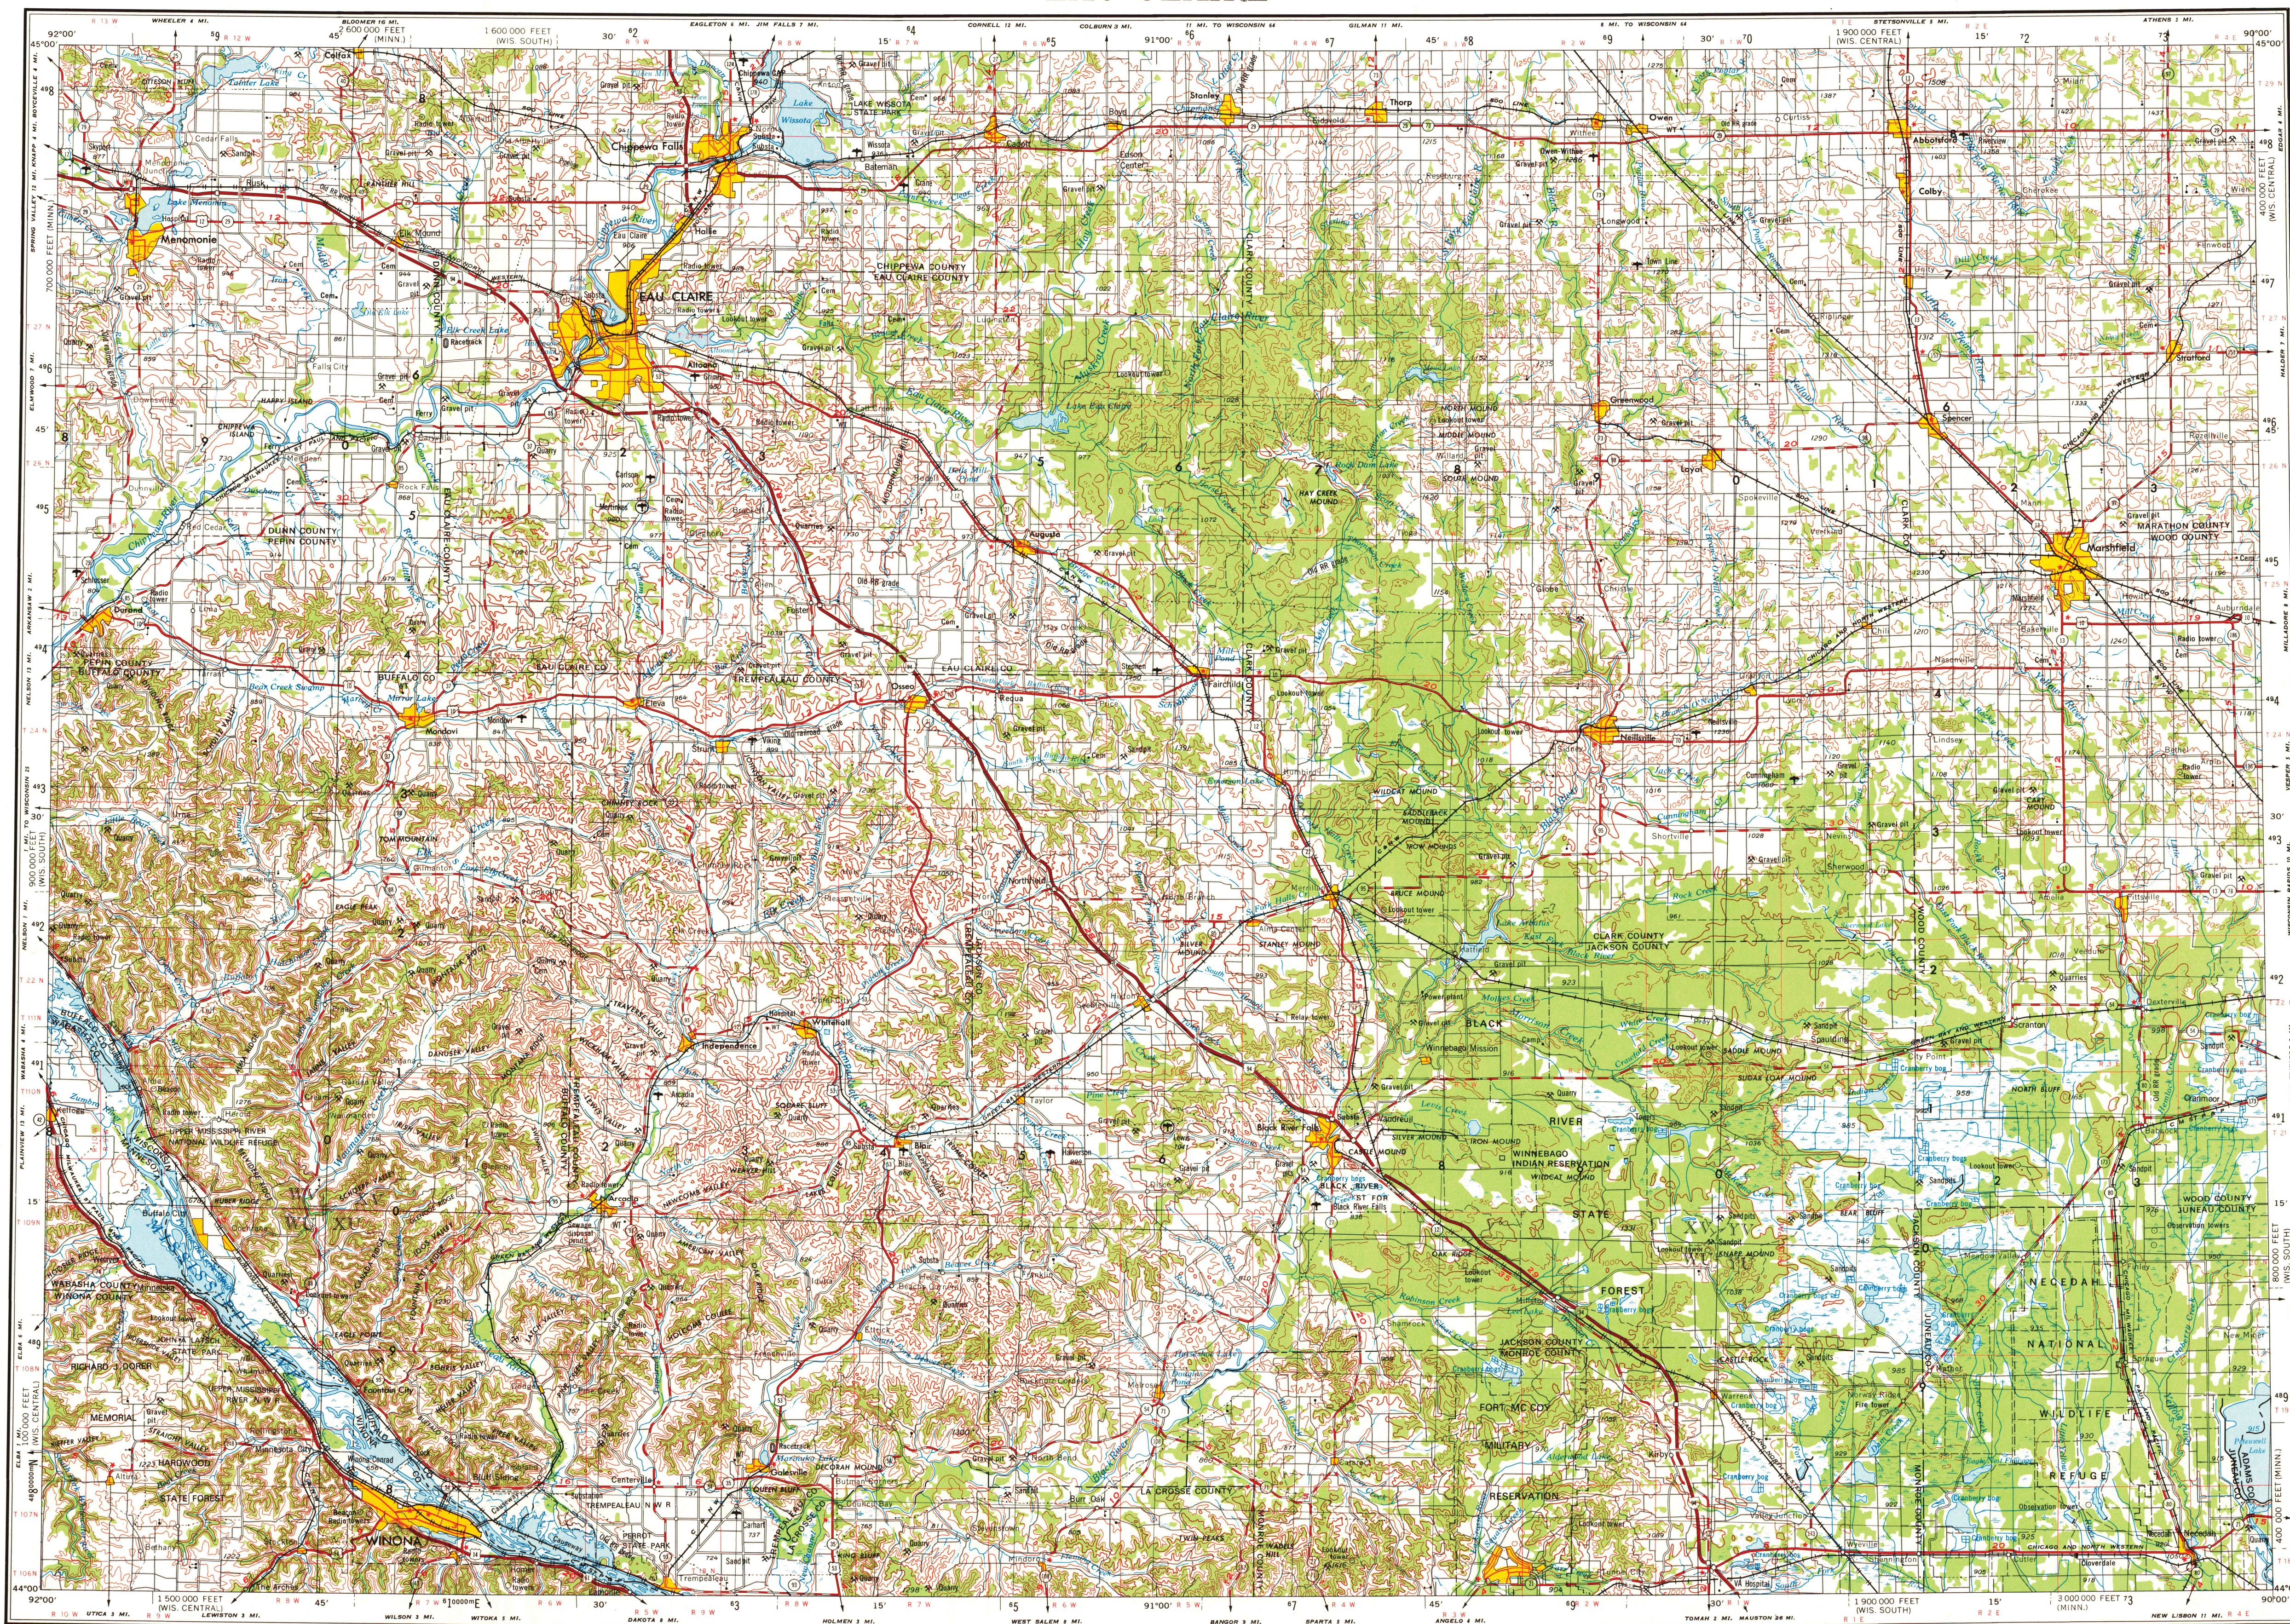

Prepared by the Defense Mapping Agency Topographic Center, Washington, D. C. Compiled in 1954 by photogrammetric methods from aerial photographs taken 1949-53. Photographic field annotated 1953. Revised by the U. S. Geological Survey from aerial photographs taken 1976. Map edited 1977.

100,000-foot grid based on Wisconsin coordinate system, central and south zones and Minnesota coordinate system, south zone.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

ROADS

Primary, all-weather, hard surface
Secondary, all-weather, hard surface
Light-duty, all-weather, hard or improved surface
Fair or dry weather, unimproved surface
Trail
Interchange

RAILROADS

Normal gauge
Narrow gauge
International

BOUNDARIES

State
County
Park or reservation

Landplane airport
Landing area
Seaplane airport
Seaplane anchorage
Woods-brushwood

Landmark: School; Church; Other
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line

Scale 1:250,000

20 Statute Miles
15 Nautical Miles
15 Kilometers

CONTOUR INTERVAL 100 FEET
WITH SUPPLEMENTARY CONTOURS AT 50 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 15

1977 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 31° 10' WEST FOR THE CENTER OF THE WEST EDGE TO 14° 10' WEST FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM

Shows the location of the map sheet within the 100,000-foot grid. The diagram includes a grid of letters and numbers, with the specific location of the map sheet highlighted.

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION

100,000 M. SQUARE IDENTIFICATION

TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: NUMBER

TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 100 METERS

TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 100 METERS

EAU CLAIRE, WISCONSIN; MINNESOTA

1953
REVISED 1977

USGS
Historical File
Topographic Division

11,300