



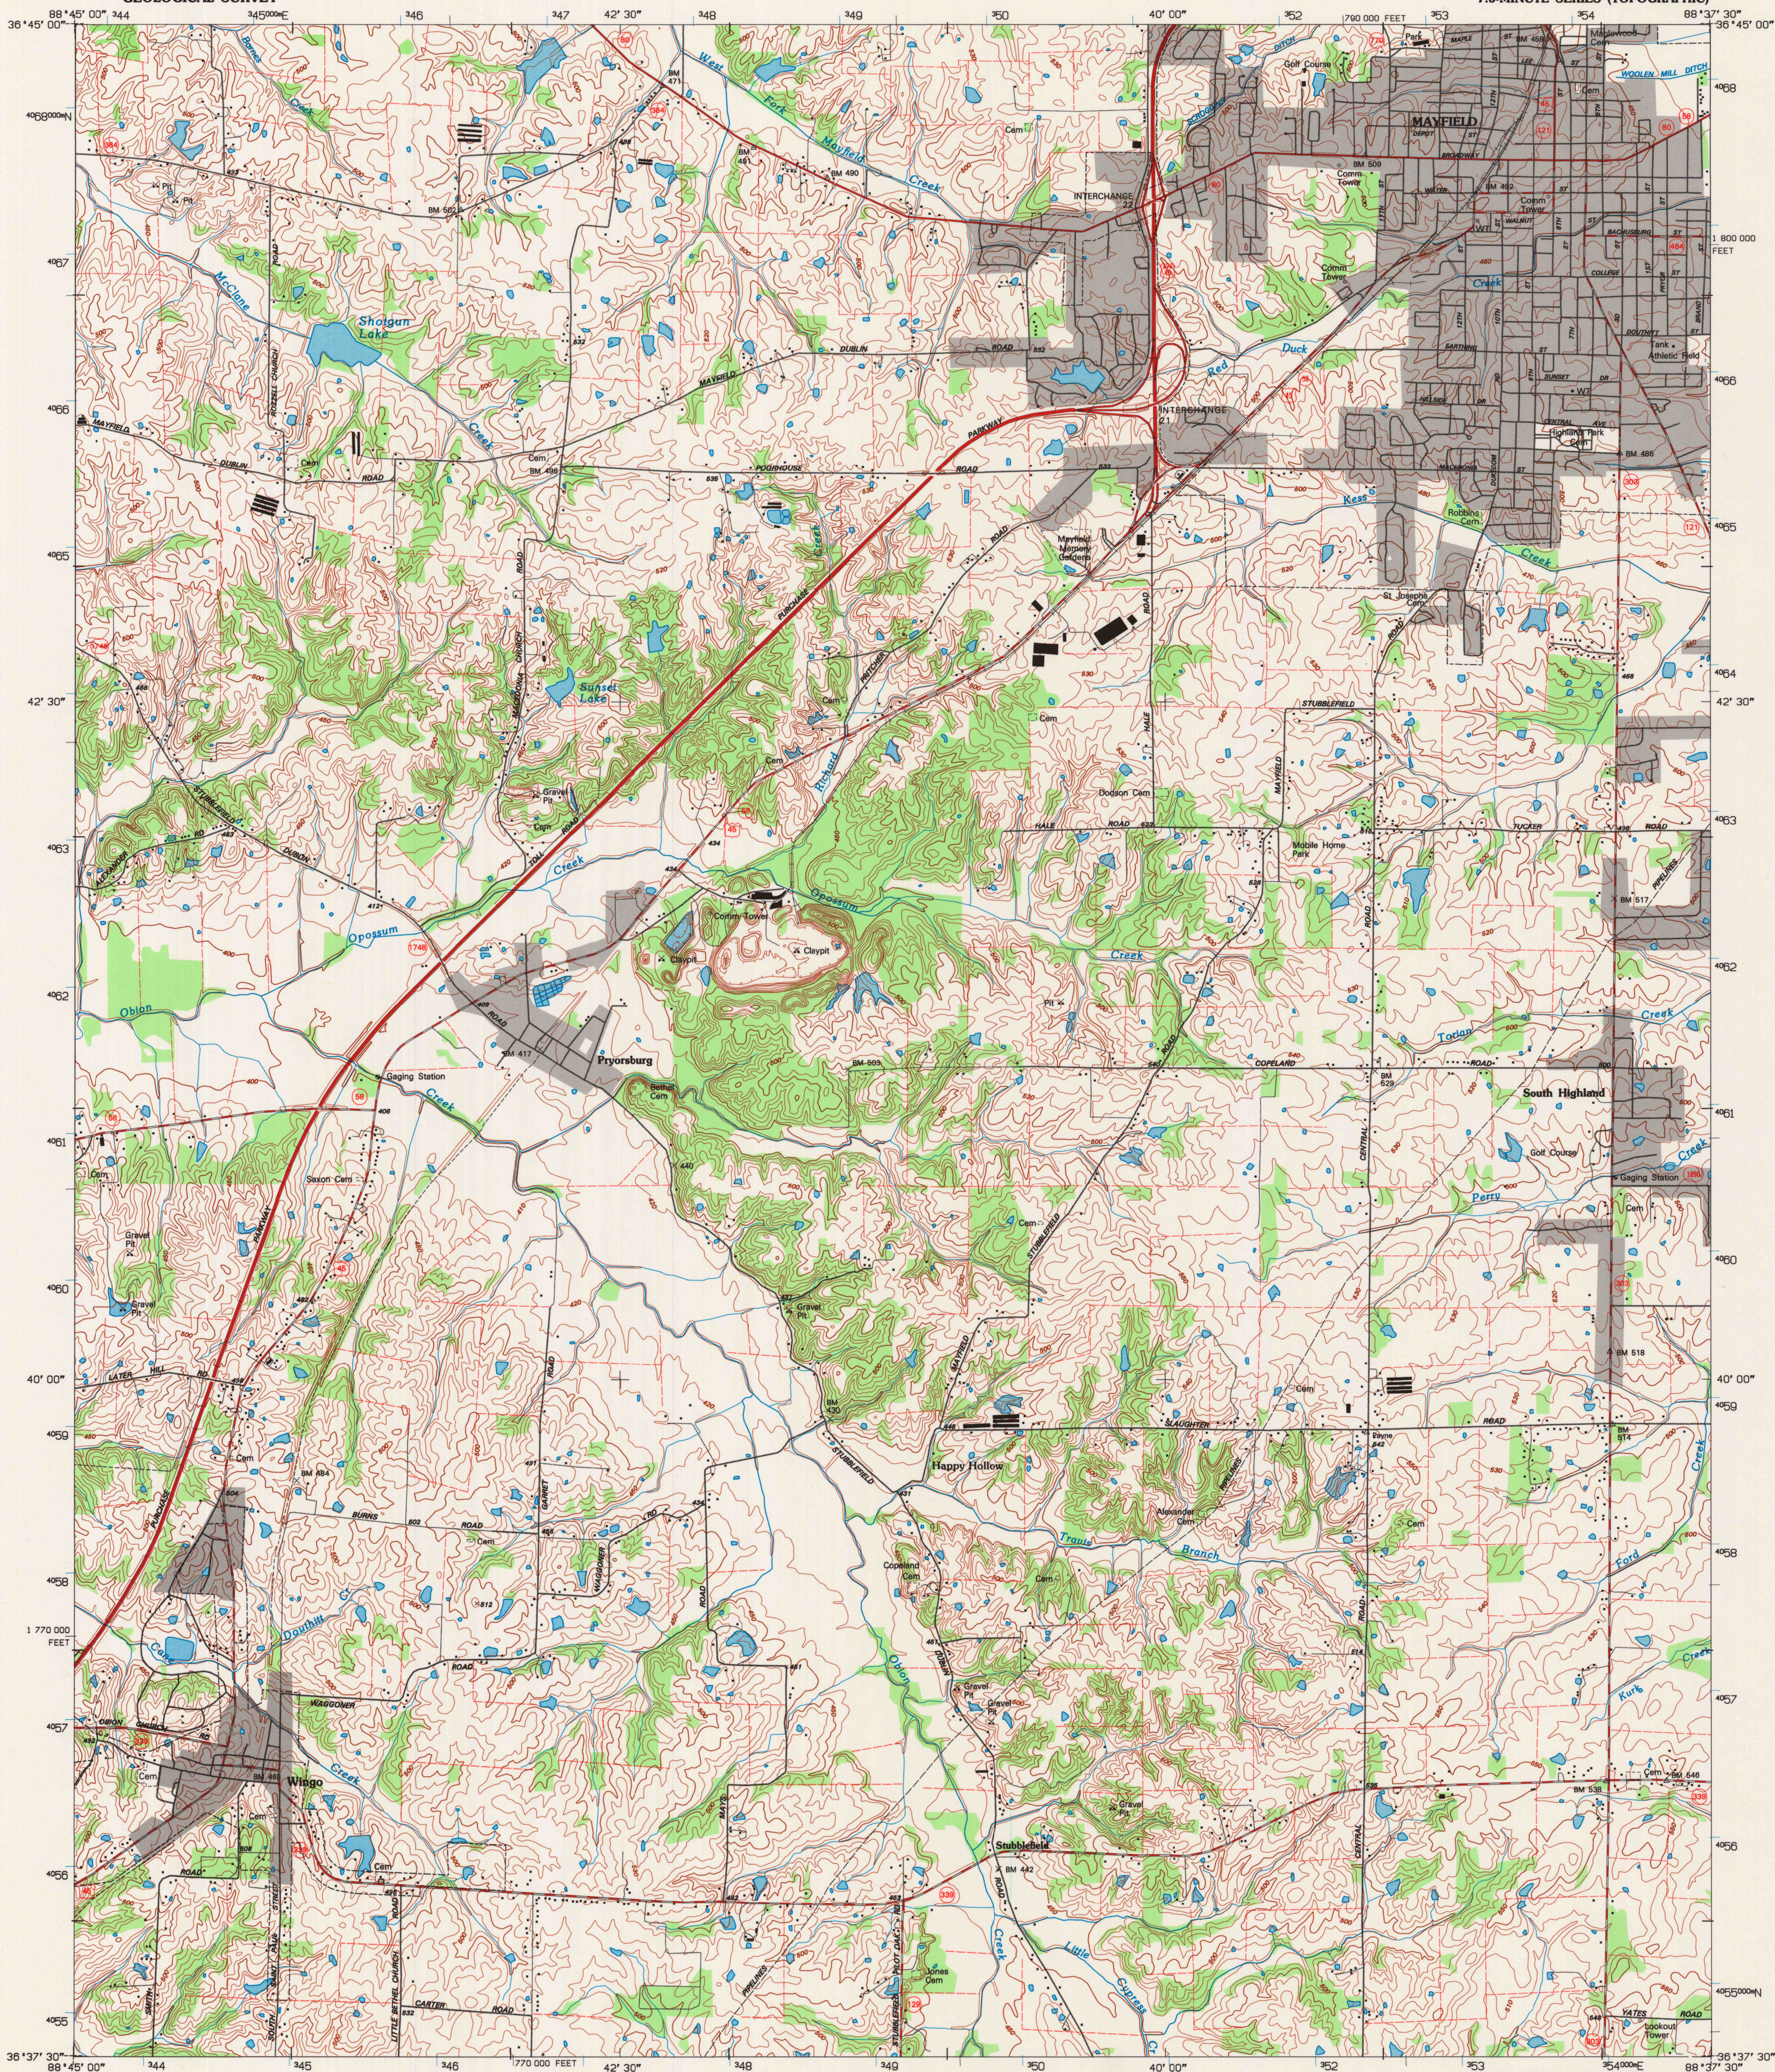

Produced by the United States Geological Survey
in cooperation with Kentucky Geological Survey
Compiled by photogrammetric methods from imagery dated 1950
Topography partly by planimetric surveys 1952. Revised from
imagery dated 1968. Field checked 1969. Survey control current as of 1969. Map edited
1995. Contours not revised.
North American Datum of 1983 (NAD 83). Projection and
blue 1000-meter ticks: Universal Transverse Mercator, zone 16
10 000-foot ticks: Kentucky Coordinate System of 1983 (south zone)
North American Datum of 1927 (NAD 27) is shown by dashed
corner ticks. The values of the shift between NAD 83 and NAD 27
for 7.5-minute intersections are obtainable from National Geodetic
Survey NADCON software

UTM GRID AND 1994 MAGNETIC NORTH
DECLINATION AT CENTER OF SHEET

SCALE 1:24 000
1 2 3 4 5 6 7 8 9 10
1000 0 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000
METERS
1 2 3 4 5 6 7 8 9 10
1000 0 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000
MILES
CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929



QUADRANGLE LOCATION

1	2	3
4	5	6
7	8	9

ADJOINING 7.5' QUADRANGLE NAMES

ROAD CLASSIFICATION
Primary highway
hard surface
Secondary highway
hard surface
Light-duty road, hard or
improved surface
Unimproved road

USGS AND HISTORICAL
MAP ARCHIVES
MAY 21 1996
REC'D FILE COPY

MAYFIELD, KY
36088-F6-TF-024
1994

DMA 3257 II NW-SERIES V853

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
KENTUCKY GEOLOGICAL SURVEY, LEXINGTON, KENTUCKY 40506
AND KENTUCKY DEPARTMENT OF COMMERCE, FRANKFORT, KENTUCKY 40601
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

