ST. LAWRENCE

EDITION 2-AMS

NP 1, 2-4
SERIES Q501

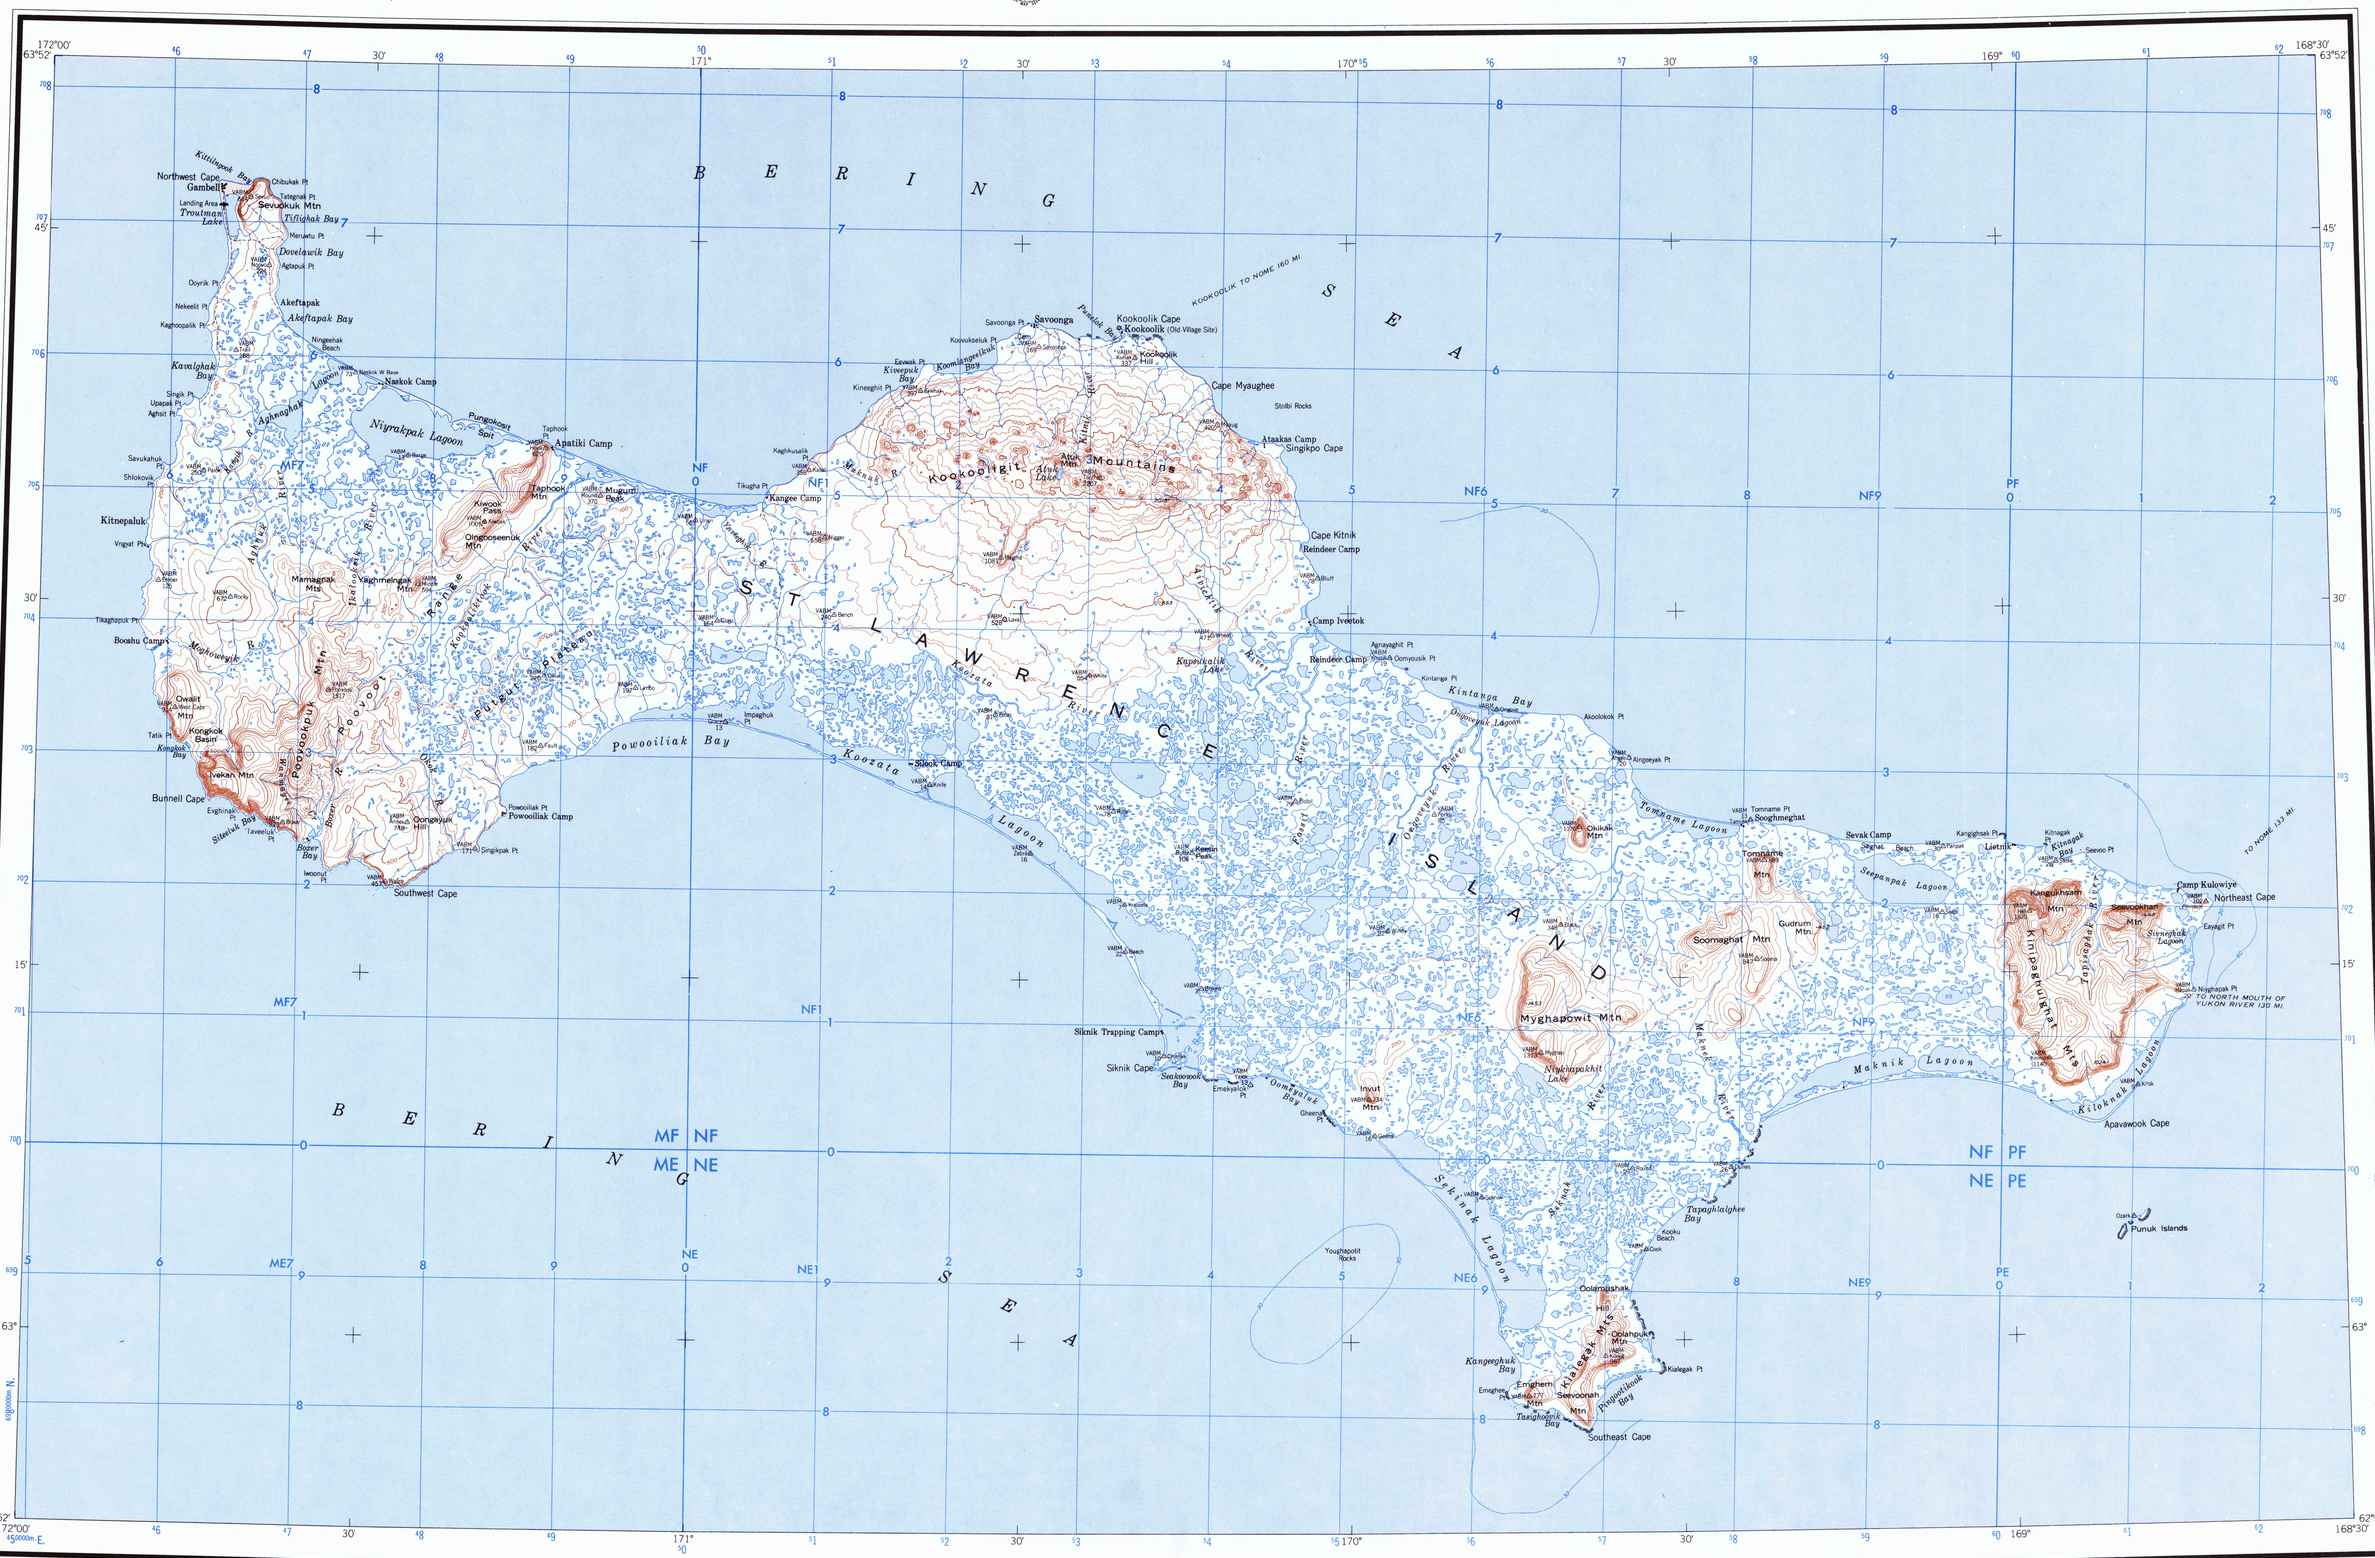

Q501
Edition 2-AMS.

Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, St. Lawrence, 1948. Original map compiled from Army Map Service, Alaska 1:25,000 series, 1948. Coastal hydrography compiled from USC&GS Charts 9302 (1956), and 9380 (1952). Control by USC&GS. Map not field checked. No areas of vegetation exist on this sheet.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 12°00' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 14°30' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°03' WESTERLY.

LEGEND

POPULATED PLACES
Over 12,000 — ANCHORAGE
5,000 to 12,000 — JUNEAU
1,000 to 5,000 — SEWARD
500 to 1,000 — Skagway
125 to 500 — Sterling
Less than 125 — Haines

RAILROADS (Single track; Double or Multiple)
Normal gauge
Narrow gauge

BOUNDARIES
International
Park or reservation
Horizontal control point
Spot elevation in feet: Checked 22X
Spot elevation in feet: Unchecked 22X
Route marker: Federal; State (21) (10)
Woods-brushwood
Scrub

ROADS
Hard surface, heavy duty road
More than two lanes wide
Two lanes wide
Hard surface, medium duty road
More than two lanes wide
Two lanes wide
Improved light duty road
Unimproved dirt road; Trail
Mine; Mine prospect; Mine shaft; Mine tunnel
Landmarks: School; Church; Other
Land subject to inundation
Mine tailings
Landplane airport
Landing area
Seaplane airport
Seaplane anchorage
Glacier
Glacial moraine
Depth curve in feet
Limit of danger; Reef
Wrecks: Sunken; Exposed
Rocks: Sunken; Awash
Foreshore flat
Intermittent or dry stream
Marsh or swamp

Scale 1:250,000
5 0 5 10 15 20 25 Statute Miles
5 0 5 10 20 25 30 35 Kilometers
5 0 5 10 15 Nautical Miles

CONTOUR INTERVAL 100 FEET
VERTICAL DATUM: MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

HYDROGRAPHIC DATUM: DEPTH CURVES IN FEET REFERRED TO MEAN LOWER LOW WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 2

REFER CORRECTIONS TO THIS MAP TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C.

United States Topo. 1:250,000-
Sheet St. Lawrence, 1964.
cop. 1.

LOCATION DIAGRAM FOR NP 1, 2-4



SX 9-64 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

STOCK NO. Q501XNP124

GRID ZONE DESIGNATION: 2V
100,000 M. SQUARE IDENTIFICATION

MF	NF	PF
ME	NE	PE
50	60	70

IGNORE THE SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 600000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: KOOKOOLIK

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: Estimate tenths from grid line to point:
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: Estimate tenths from grid line to point:

NF	3
	2
	6
	2

SAMPLE REFERENCE: NF3262

If reporting beyond 97°6 E or 18°E W, prefix Grid Zone Designation, as: 2VNF3262

ST. LAWRENCE, ALASKA

AUG - 1965
LIBRARY