





CONVERSION
SCALES

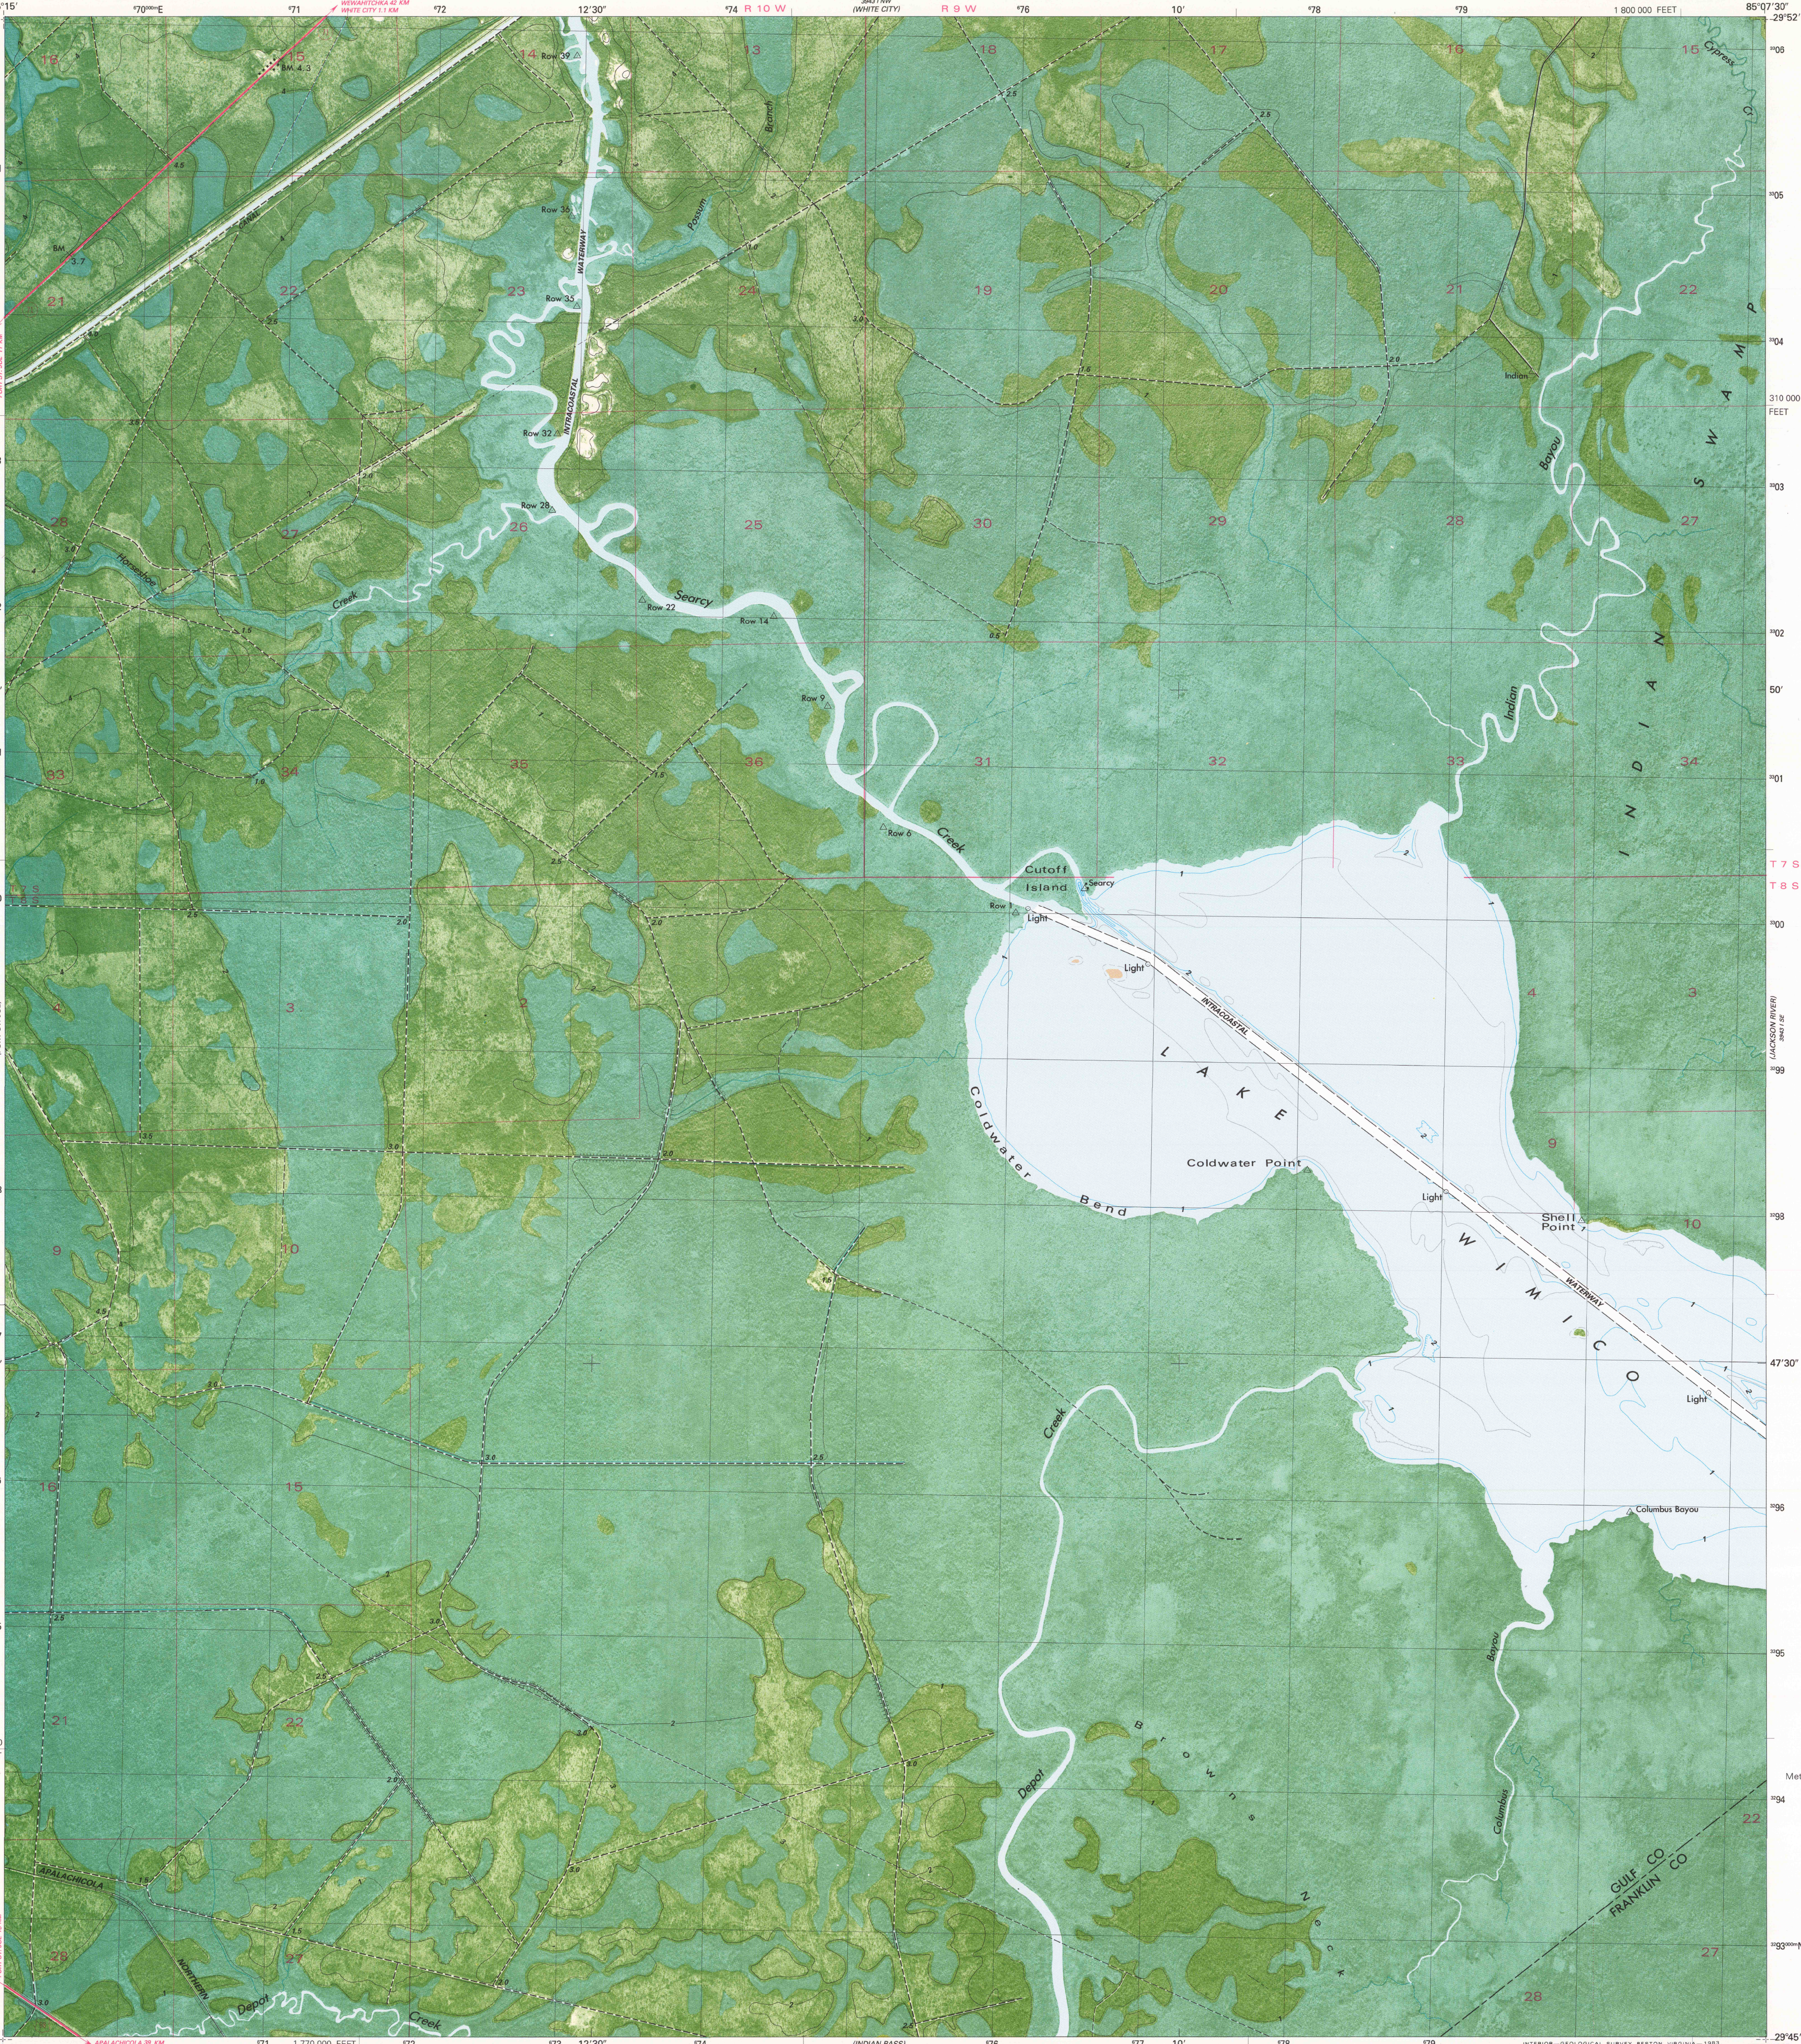


Feet	Meters
1	0.3048
2	0.6096
3	0.9144
4	1.2192
5	1.5240
6	1.8288
7	2.1336
8	2.4384
9	2.7432
10	3.0480


To convert feet to meters
multiply by 0.3048
To convert meters to feet
multiply by 3.2808

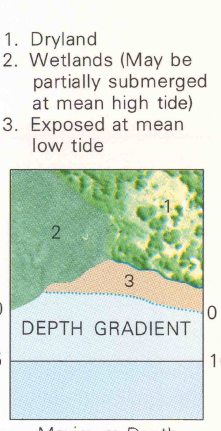


Produced by the United States Geological Survey
and National Ocean Survey
Control by USGS and NOS/NOAA
Orthophotomaps prepared from aerial photograph taken
January 10, 1976. Compiled by photogrammetric
methods from aerial photographs taken January 1975
and planimetric surveys 1976
Field checked 1980. Map edited 1982
Supersedes topographic map dated 1945
Bathymetry compiled by the National Ocean Survey from
tide-coordinated hydrographic surveys
This information is not intended for navigational purposes
Mean low water (dotted) line and mean high water (solid) line
compiled by NOS from tide-coordinated aerial photographs
Apparent shoreline (outer edge of vegetation) shown by photoimagery
Projection and 10,000-foot grid ticks: Florida coordinate
system, north zone (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 16
1927 North American Datum
To place on the predicted North American Datum 1983
move the projection lines 21 meters south and
8 meters west as shown by dashed corner ticks
Where omitted, land lines have not been
established
Dotted land lines established by private subdivision of the
Forbes Purchase. Information supplied by State of Florida

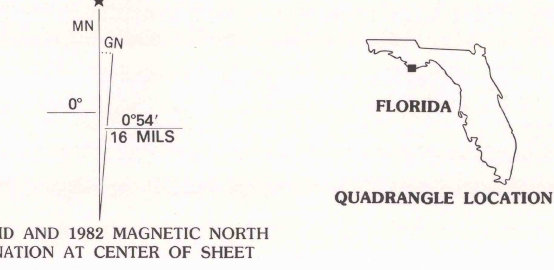


HYDROGRAPHIC SURVEY INFORMATION			
Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Neat Miles)
H-5796	1935	1:10,000	02-12

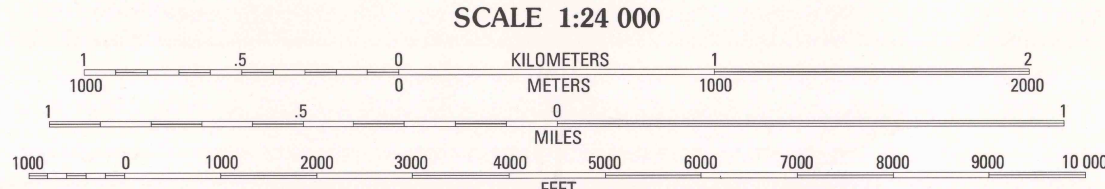

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY
0.5 METER CONTOURS-DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER
BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SURVEY, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

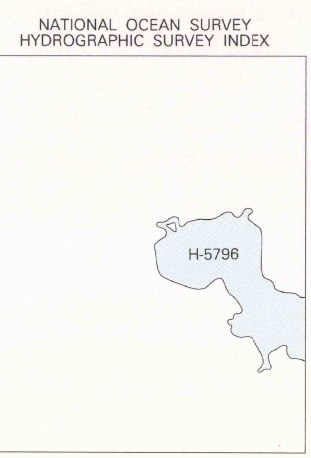

ROAD CLASSIFICATION
Primary highway, hard surface
Secondary highway, hard surface
Trails
Interstate Route
U. S. Route
State Route
County Route
Light-duty road, hard or improved surface
Unimproved road

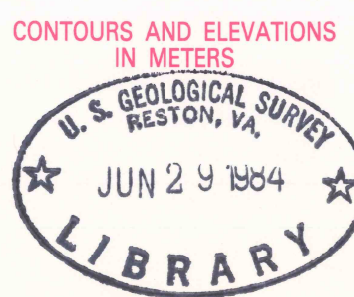

LAKE WIMICO, FLA.
29085-G2-TB-024
1982
DMA 3943 1 SW-SERIES V8470