


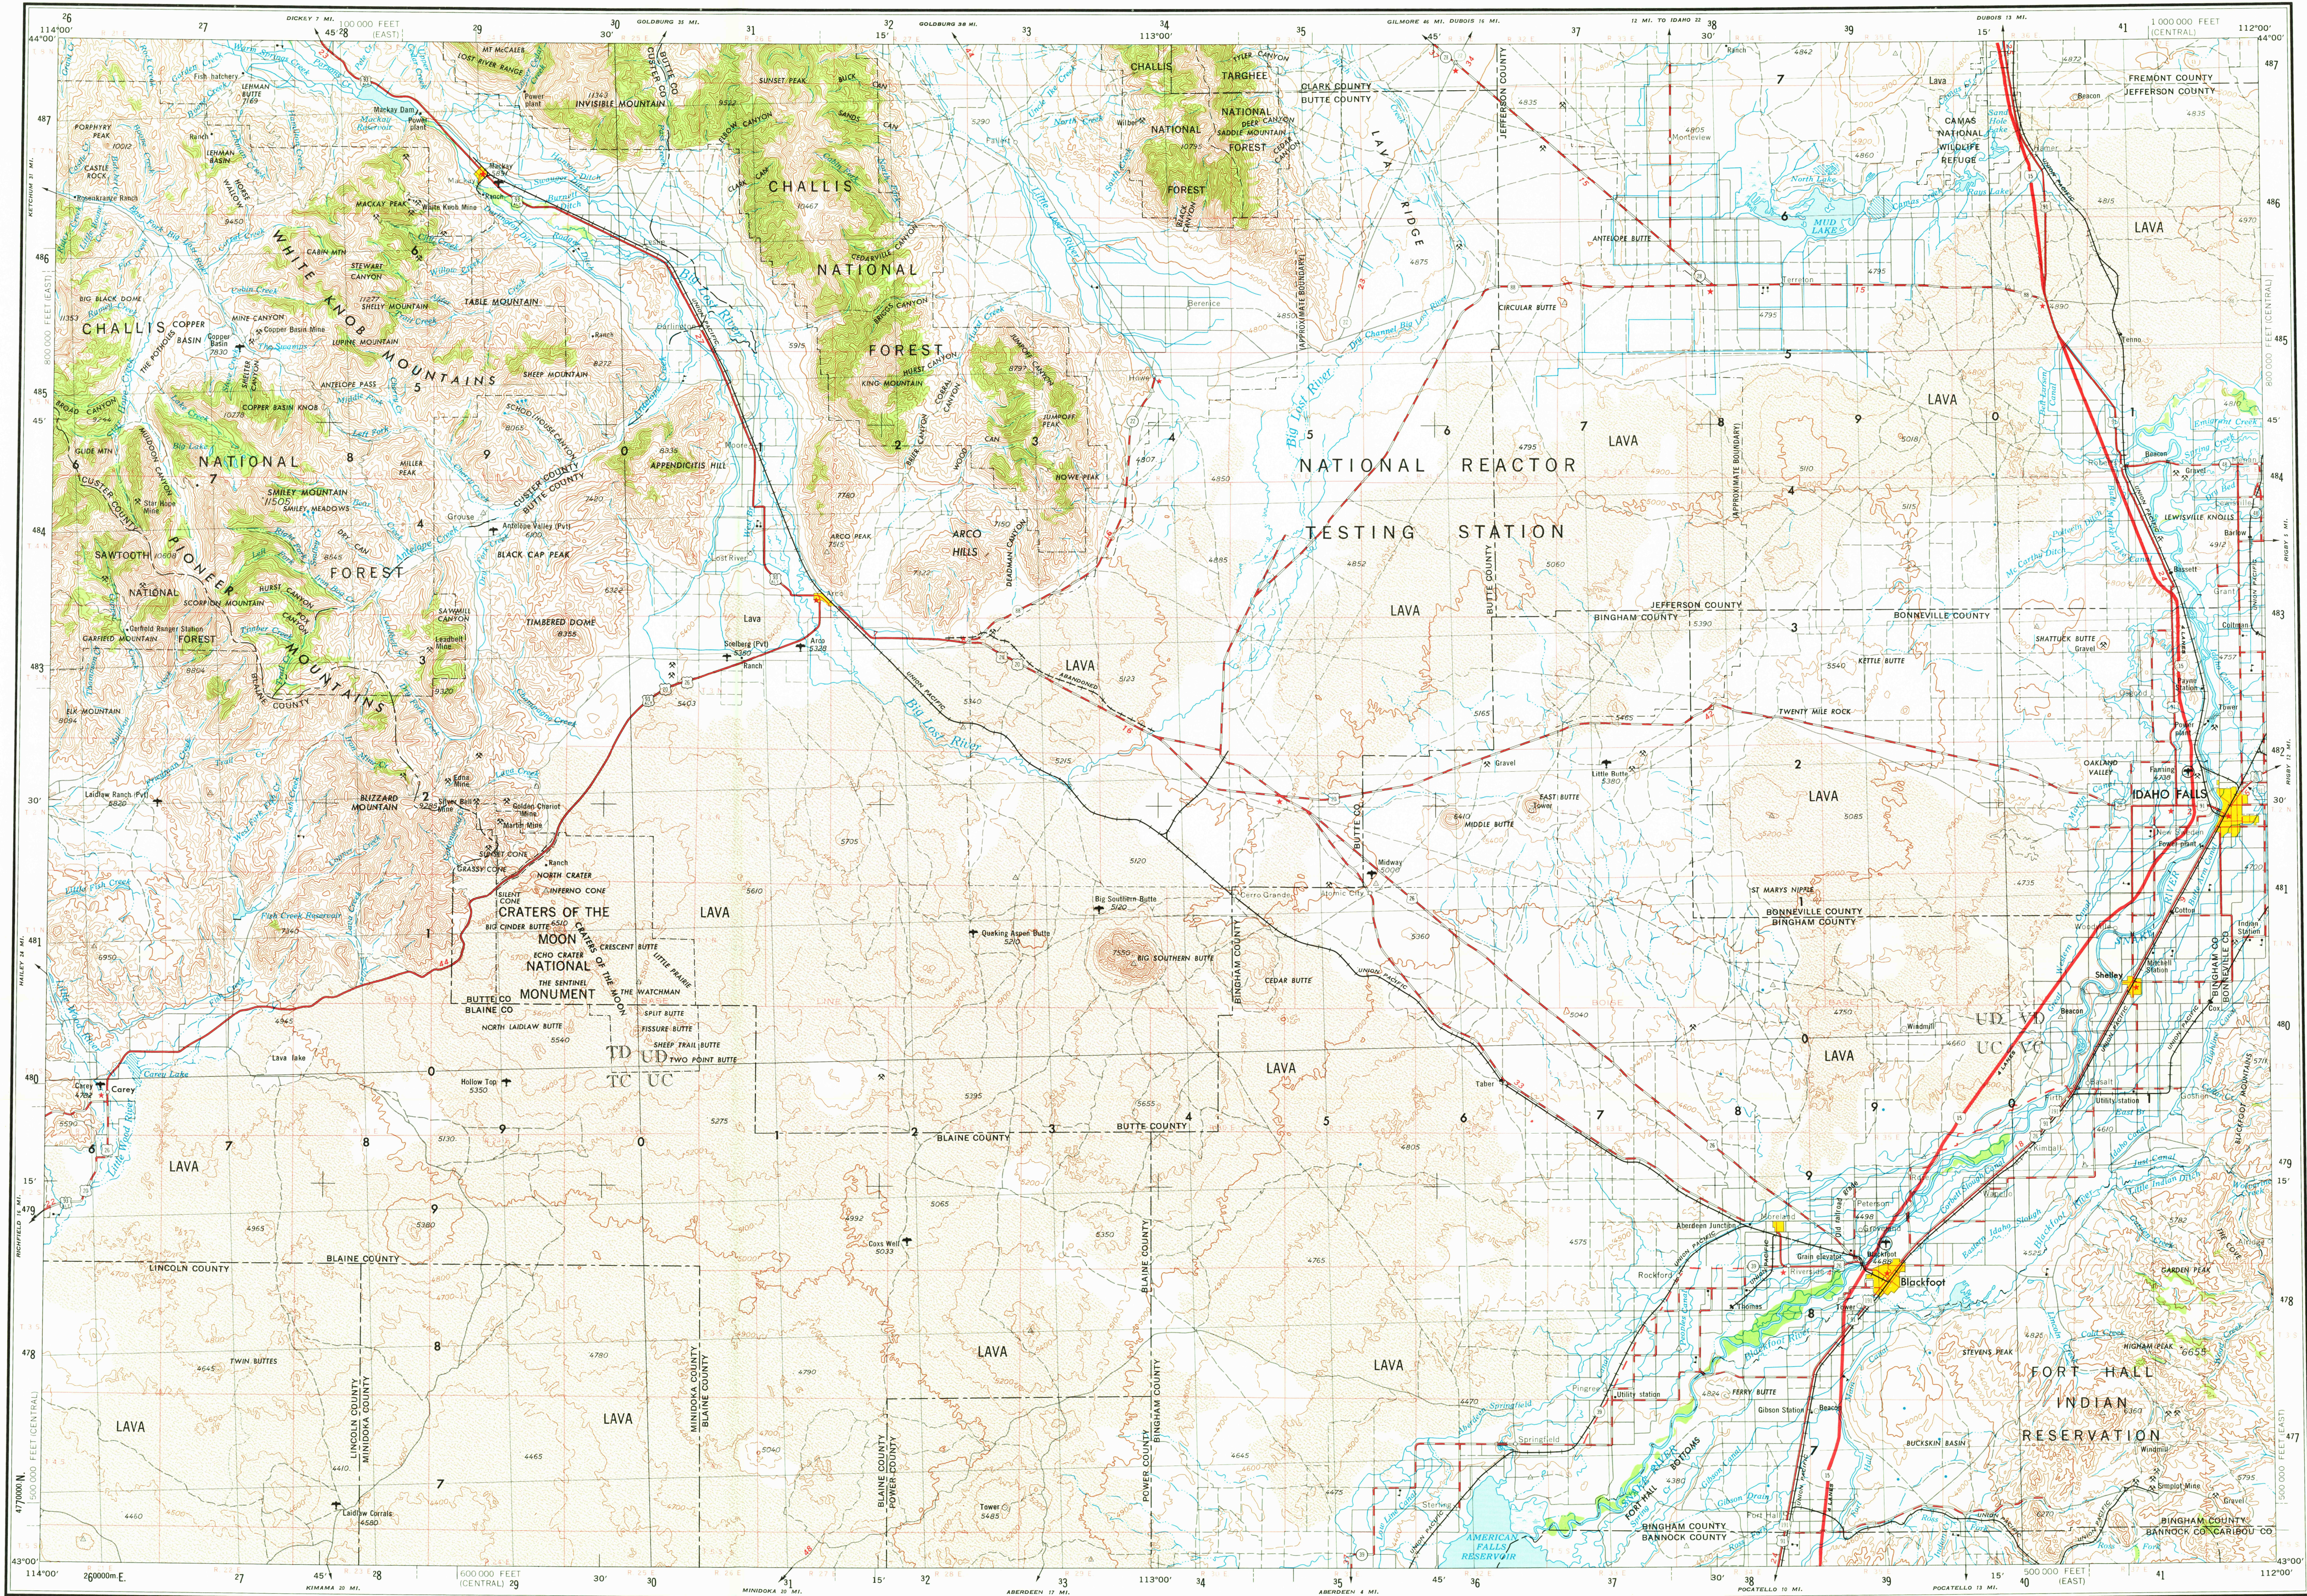

V502, EDITION 2
Prepared by the Army Map Service (AMSS), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1955 by photogrammetric methods and from USGS quadrangles, 1:24,000, 1:62,500 and 1:125,000, 1925-51. Planimetric detail revised by photogrammetric methods. Horizontal and vertical control by USGS, USC&GS, and CE. Photographic field annotated 1954-55. Limited revision by U.S. Geological Survey, 1962.
100,000-foot grids based on Idaho coordinate system, central and East zones

LEGEND

ROAD DATA 1955 PARTIALLY REVISED 1962
Figures in red indicate approximate mileages between stars

POPULATED PLACES
Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS
Single track
Double or Multiple
Standard gauge
Narrow gauge
Bridges

BOUNDARIES
International
State
County
Park or reservation

LANDMARKS
School
Church
Other

Other Symbols
Horizontal control point
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line
Approximate road alignment

Scale
1:250,000
0 5 10 15 20 25 30 Statute Miles
0 5 10 15 20 25 30 Kilometers

**CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS**
TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 12

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 17°45' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 17°10' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°02' WESTERLY.

FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM

SECTIONIZED TOWNSHIP

GRID ZONE DESIGNATION
12T
100,000 M. SQUARE IDENTIFICATION

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS
SAMPLE POINT: CERRO GRANDE

1. Read letters identifying 100,000 metre square in which the point lies.
2. Locate first VERTICAL and line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point.
4. Locate first HORIZONTAL and line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

5. Estimate tenths from grid line to point.

SAMPLE REFERENCE:
If reading beyond 10" in any direction, prefix Grid Zone Designation, as: 12TUD4311

**USGS
Historical File
Topographic Division**

**IDAHO FALLS, IDAHO
1955
LIMITED REVISION 1962**