


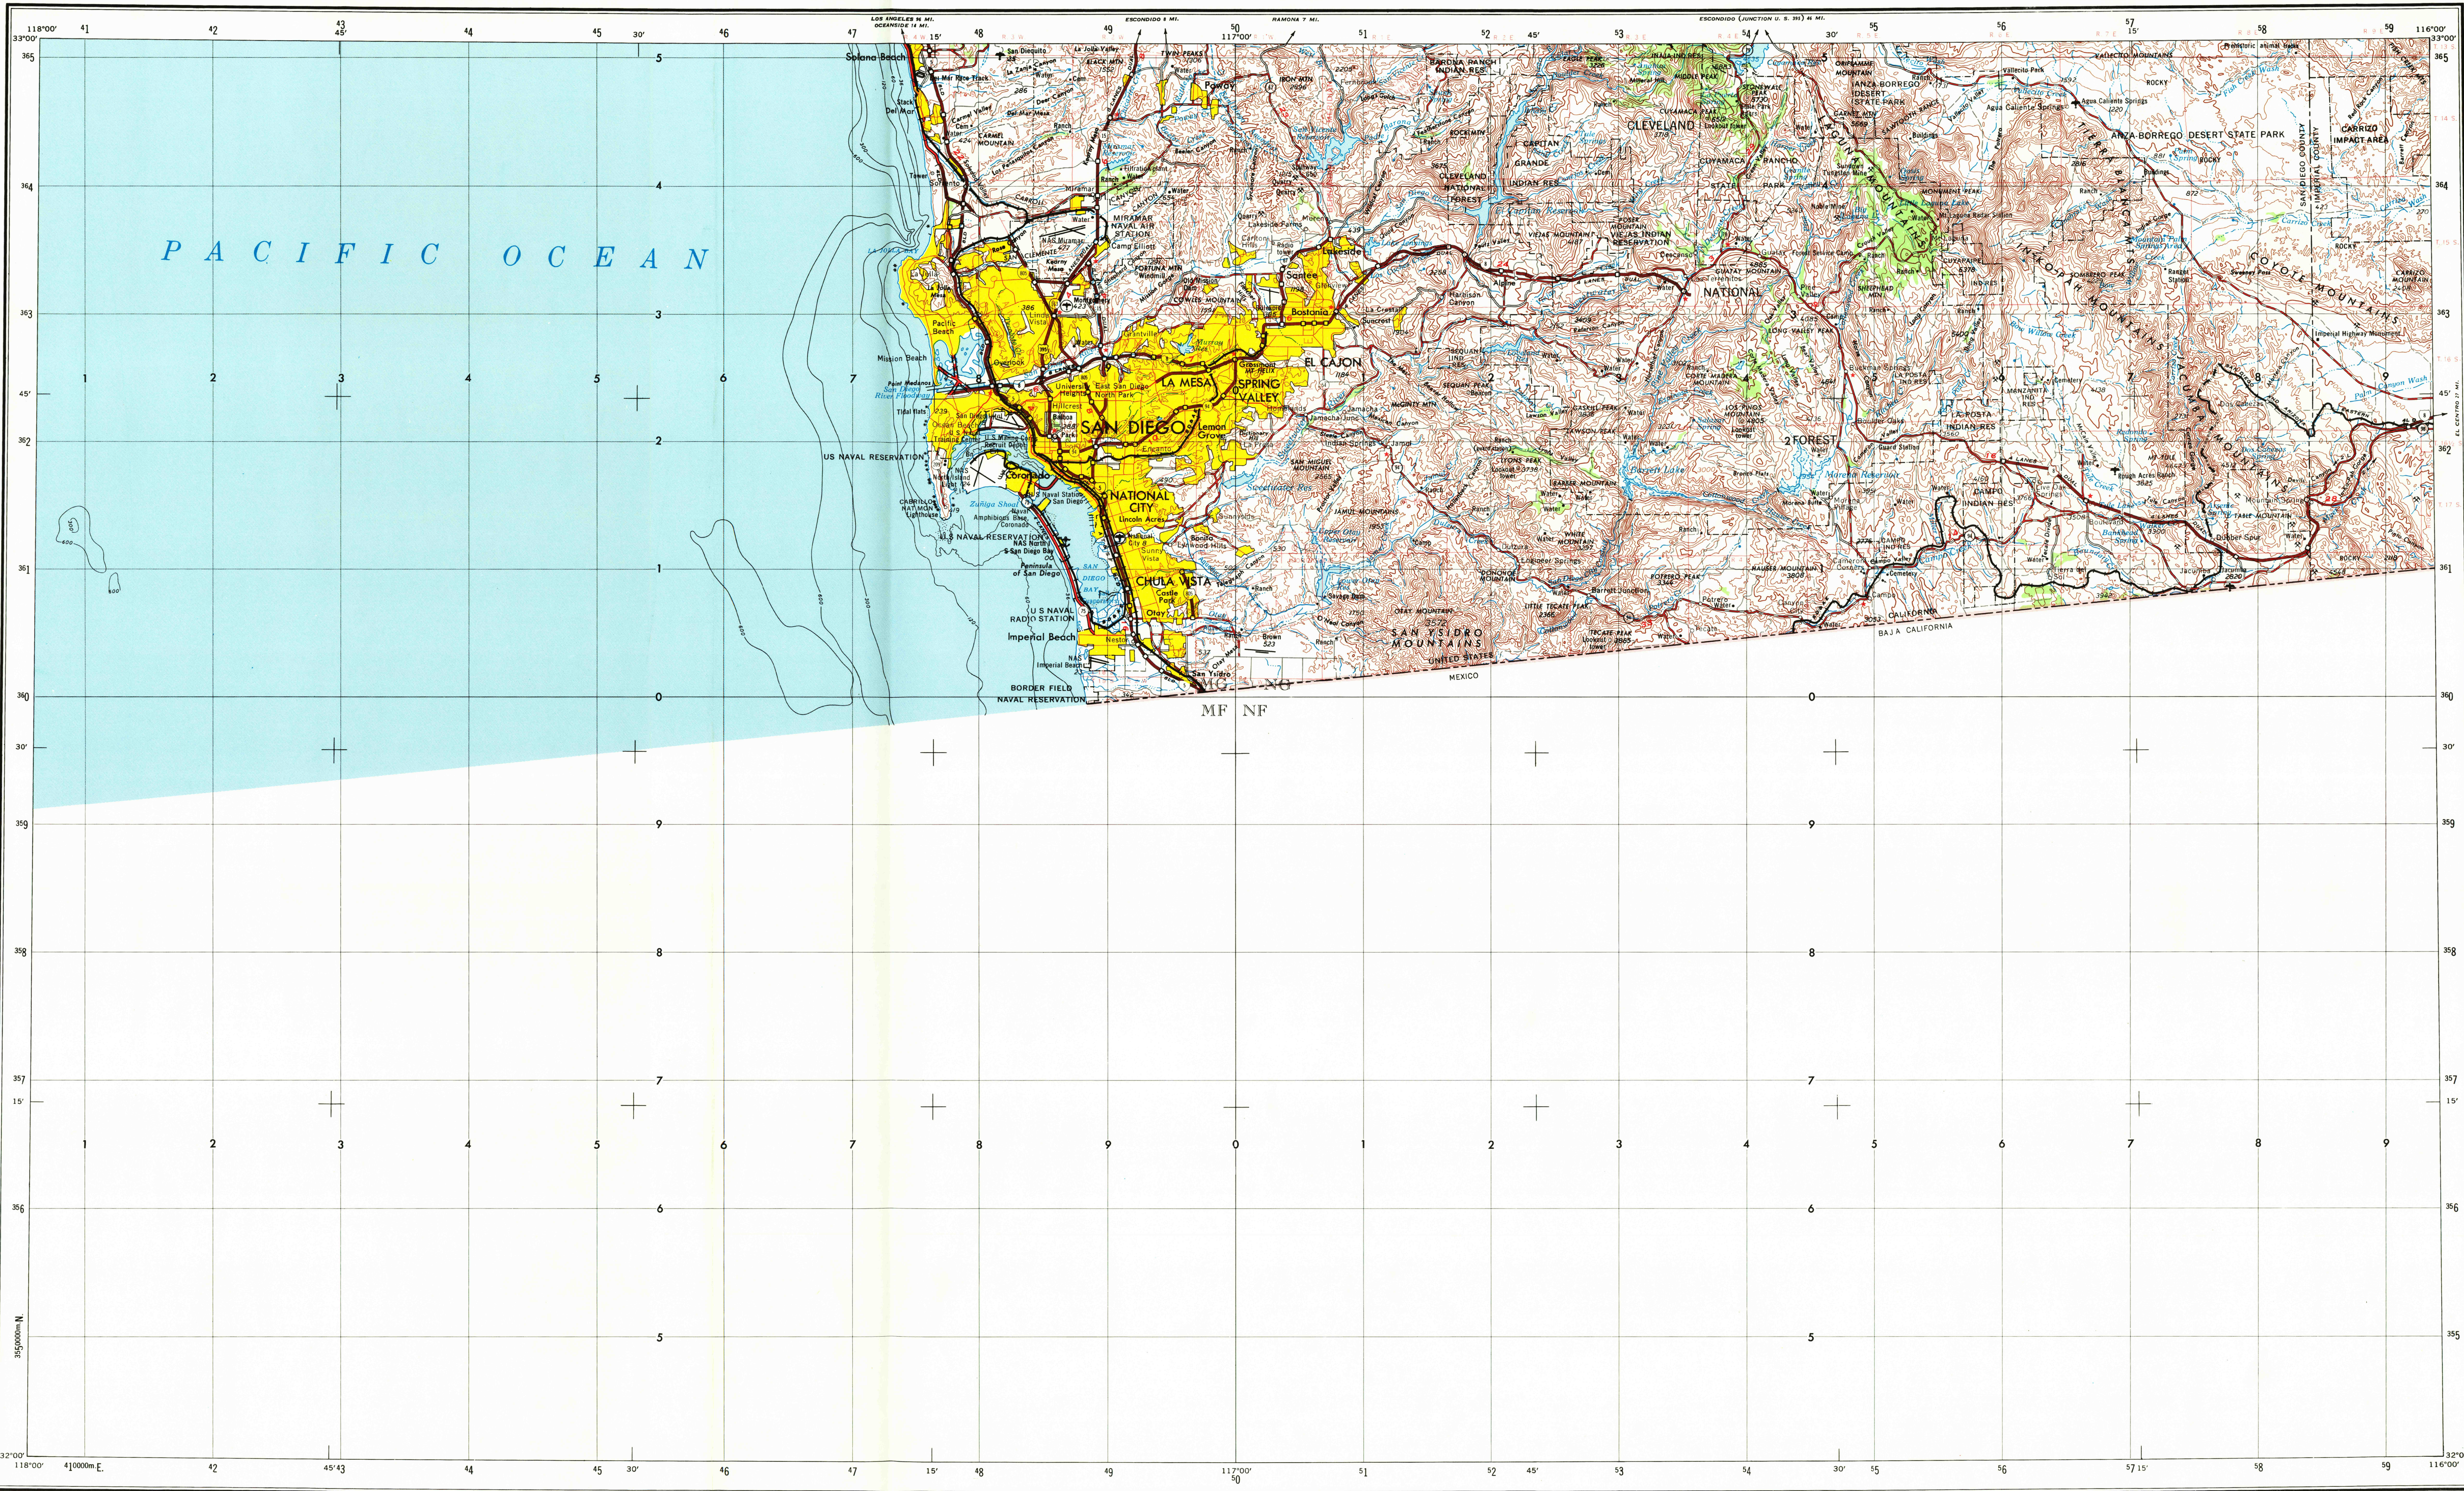

V502, EDITION 4

Prepared by the U. S. Army Topographic Command (KTPC), Washington, D.C. Compiled in 1958 by photogrammetric methods and from United States quadrangles, 1:24,000, 1:25,000, and 1:50,000, 1938-55; USCGS charts, 1955; USNO chart, 1955. Planimetry revised from aerial photographs taken 1953-55. Map field checked 1958. Revised by the U. S. Geological Survey 1970.

Selected hydrographic data compiled from USCGS and USNO charts. This information is not intended for navigational purposes.


Area covered by dashed light-blue pattern is subject to controlled inundation.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars.

POPULATED PLACES	ROADS	RAILROADS	BOUNDARIES	Spot elevation in feet
Over 500,000	Primary, all-weather, hard surface	Single track Double or Multiple	National	22' Woods-brushwood
100,000 to 500,000	Secondary, all-weather, hard surface	Narrow gauge	State	
25,000 to 100,000	Light-duty, all-weather, hard or improved surface	Standard gauge	County	
5,000 to 25,000	Fair or dry weather, unimproved surface	Landplane airport	Seaplane airport	
1,000 to 5,000	Trail	Landing area	Seaplane anchorage	
Less than 1,000	Interchange	Limit of danger; Reef	Foreshore flat	
	Route markers: Interstate, U.S., State	Depth curve in feet	Intermittent or dry stream	
	Landmarks: School, Church, Other	Limit of danger; Reef	Marsh or swamp	

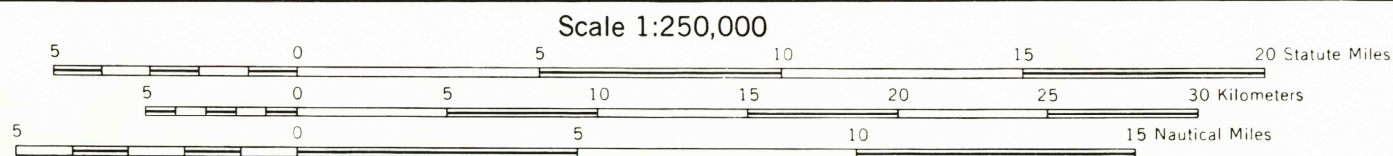


CONTOUR INTERVAL 200 FEET
TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 11

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 14° (250 MILES) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 14° (250 MILES) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20242

LOCATION DIAGRAM

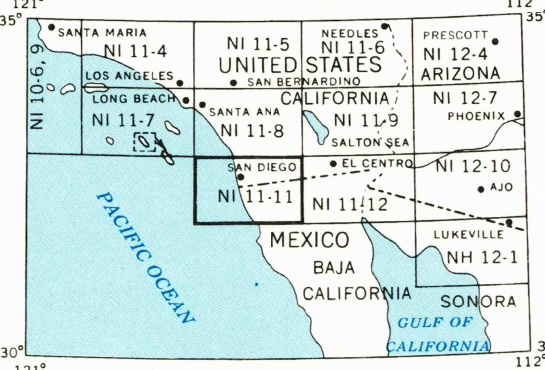

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

USGS
HISTORICAL FILE
TOPOGRAPHIC DIVISION

GRID ZONE DESIGNATION	TO OBTAIN A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
11S	SAMPLE POINT: TIERRA DEL SOL
MG NG	1. Read letters identifying 100,000 meter square in which the point lies.
MF NF	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or as the line itself.
	3. Estimate tenths from grid line to point.
	4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or as the line itself.
	5. Estimate tenths from grid line to point.
	6. If resulting figure is 0 in any direction, prefix Grid Zone Designation, 0.
	SAMPLE REFERENCE: 11SNG6309

SAN DIEGO, CALIFORNIA
1958
REVISED 1970