
ROCK SPRINGS

EDITION 3

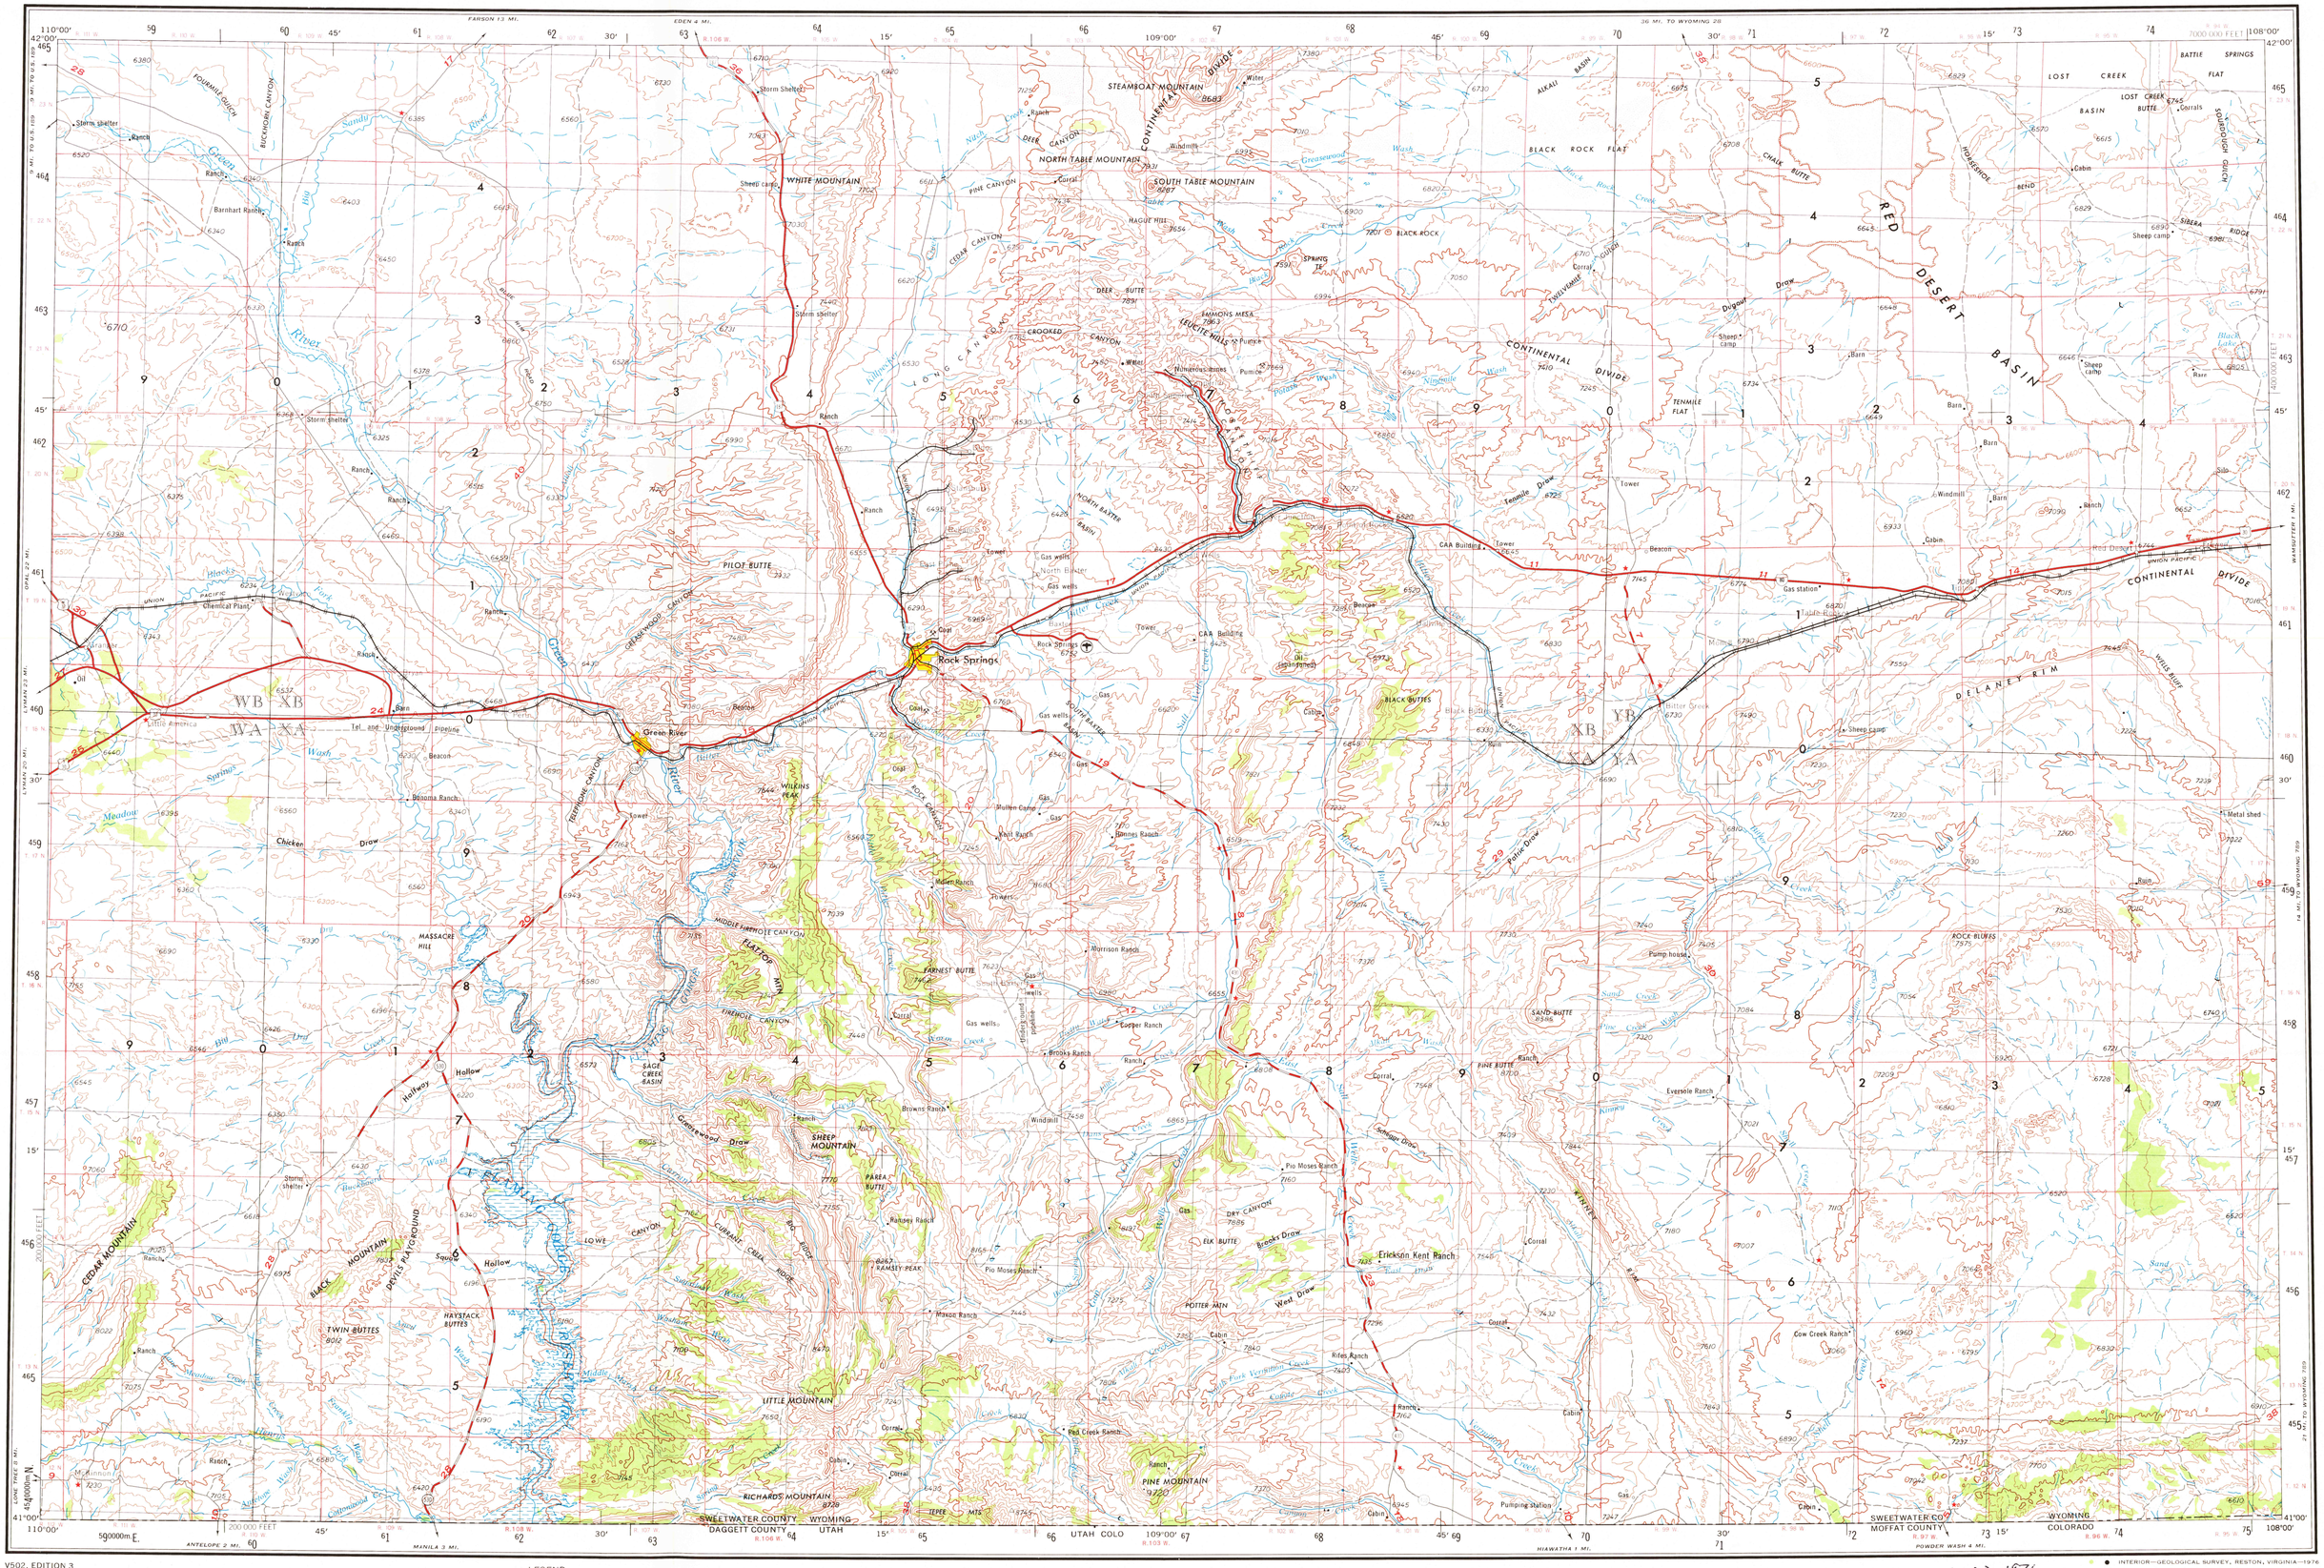

V502, EDITION 3

Prepared by the Army Map Service (FSART), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1955 by photogrammetric methods and from USGS quadrangles 1908-1943. Planimetric detail revised by photo-planimetric methods. Horizontal and vertical control by USGS and USC&GS. Aerial photography field annotated 1954.
Limited revision by U.S. Geological Survey 1962

100,000-foot grid based on Wyoming coordinate system, west central zone

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES
Over 500,000 — LOS ANGELES
100,000 to 500,000 — OMAHA
25,000 to 100,000 — GALVESTON
5,000 to 25,000 — Laramie
1,000 to 5,000 — Grand Coulee
Less than 1,000 — Sun Valley

RAILROADS
Standard gauge — Single track / Double or Multiple
Narrow gauge

BOUNDARIES
International
State
County
Park or reservation

Landplane airport
Landing area
Seaplane airport
Dry lake
Woods-brushwood

ROADS
Hard surface, heavy duty — 3 LANES | 4 LANES
More than two lanes wide
Two lanes wide; Federal route marker
Hard surface, medium duty — 3 LANES | 4 LANES
More than two lanes wide
Two lanes wide; State, Interstate route markers
Improved light duty
Unimproved dirt
Trail

Landmarks: School; Church; Other
Horizontal control point
Spot elevation in feet — 221
Marsh or swamp
Intermittent or dry stream
Power line

Scale 1:250,000
5 0 5 10 15 20 Statute Miles
5 0 5 10 15 20 25 30 Kilometres
5 0 5 10 15 Nautical Miles

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS


TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 12

1955 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 16°15' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 15°15' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°03' WESTERLY.

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

LOCATION DIAGRAM




SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

TOWNSHIP OR RANGE LINE
LAND GRANT BOUNDARY

GRID ZONE DESIGNATION
12T
100,000 M. SQUARE IDENTIFICATION



IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number.
example: 460000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METRES

SAMPLE POINT: CORRAL

1. Read letters identifying 100,000 metre square in which the point lies: XA
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: 9
 Estimate tenths from grid line to point: 5
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: 6
 Estimate tenths from grid line to point: 2

SAMPLE REFERENCE: XA9562

If reporting beyond 18° in any direction, prefix Grid Zone Designation, as: 12TXA9562

7-22-1876

ROCK SPRINGS, WYOMING; COLORADO
1954
LIMITED REVISION 1962

USGS
Historical File
Topographic Division

INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—1976

STOCK NO. V502XNK129***03
RETURN TO:
USGS MID HISTORICAL MAP ARCHIVES

JUL