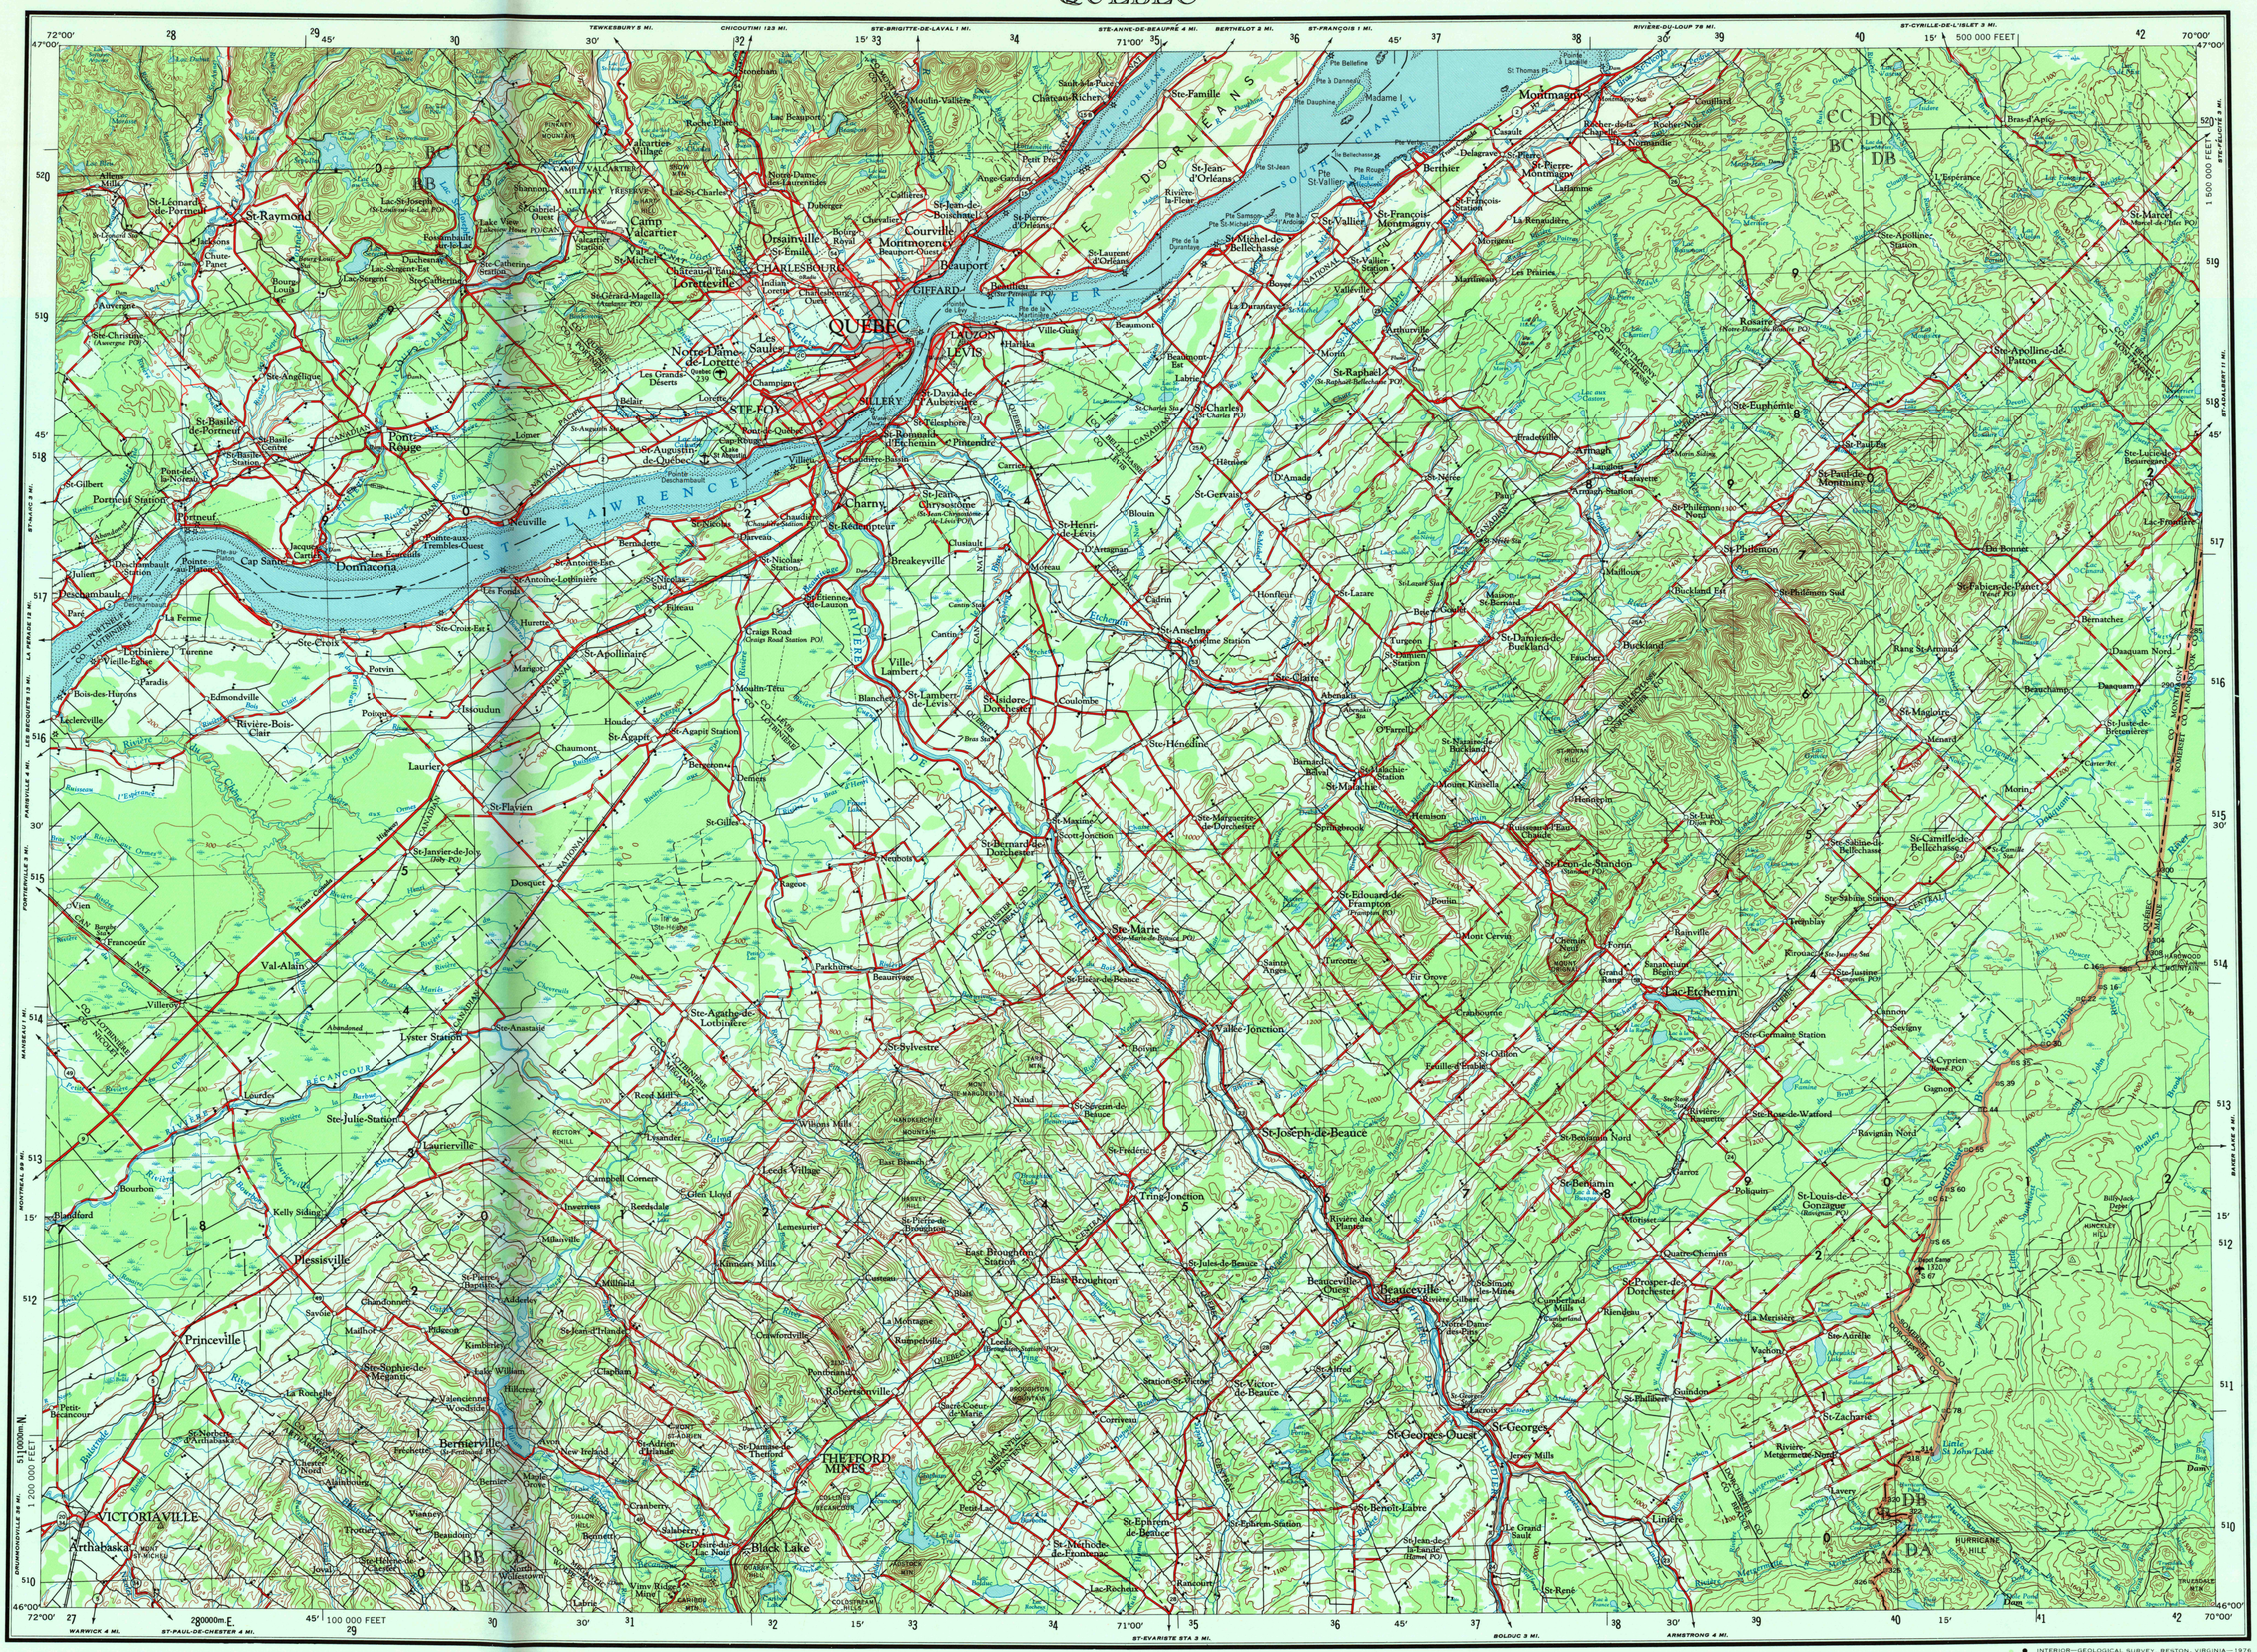


Prepared by the Army Survey Establishment, R.C.E., 1962, U.S. area from maps of the Army Map Service, Corps of Engineers, U.S. Army. Published for civil use by the Geological Survey.

100,000-foot grid based on Maine coordinate system, west zone

LEGEND
ROAD DATA 1962

POPULATED PLACES
City
Town
Settlement

LANDMARKS
Church
School

RAILROADS — Single track / Double or Multiple
Standard gauge
Narrow gauge
BOUNDARIES
International
State or Province
County or District
Park or reservation
Horizontal control point
Spot elevation in feet 221

Landplane airport
Landing area
Seaplane airport
Seaplane anchorage
Power line
Woods-brushwood

ROADS
Hard surface, all weather — 3 LANES OR MORE
Hard surface, all weather — 2 LANES; 1 LANE
Loose surface, all weather — 2 LANES OR MORE
Loose surface: all weather; dry weather — 1 LANE
Cart track or trail
Route markers: Federal; State or Provincial

Depth curve in feet
Limit of danger; Reef
Rocks: Awash; Sunken
Foreshore flat
Intermittent or dry stream
Marsh or swamp

Mud

Scale 1:250,000

5 0 5 10 15 20 Statute Miles
5 0 5 10 15 20 25 30 Kilometres
5 0 5 10 15 Nautical Miles

CONTOUR INTERVAL 100 FEET


TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 19

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 18°00' WESTERLY FOR THE CENTER OF THE WEST EDGE TO 20°15' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°02' EASTERLY.

FOR SALE BY U. S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092


LOCATION DIAGRAM



● INTERIOR—GEOLOGICAL SURVEY, RESTON, VIRGINIA—1976

GRID ZONE DESIGNATION: 19T

100,000 M. SQUARE IDENTIFICATION



IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figure of the grid number; example: 510 0000

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METRES

SAMPLE POINT: FIR GROVE

1. Read letters identifying 100,000 metre square in which the point lies: CB
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself: 6
 Estimate tenths from grid line to point: 6
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself: 4
 Estimate tenths from grid line to point: 1

SAMPLE REFERENCE: CB6641

If reporting beyond 18° in any direction, prefix Grid Zone Designation, as: 19TCB6641

QUEBEC, QUEBEC, CAN.; MAINE, U.S.
1962

RETURN TO:
USGS NMD HISTORICAL MAP ARCHIVES

JAN 2 1990